



#### General characteristics

|                      |    |          |
|----------------------|----|----------|
| Rated output current | A  | 200      |
| Rated output power   | kW | 90...110 |


#### Ambient conditions

|             |                       |     |    |     |
|-------------|-----------------------|-----|----|-----|
| Temperature | Operating temperature | min | °C | -10 |
|             |                       | max | °C | +55 |

#### Housing


|        |    |    |
|--------|----|----|
| Weight | Kg | 32 |
|--------|----|----|

#### Dimensions

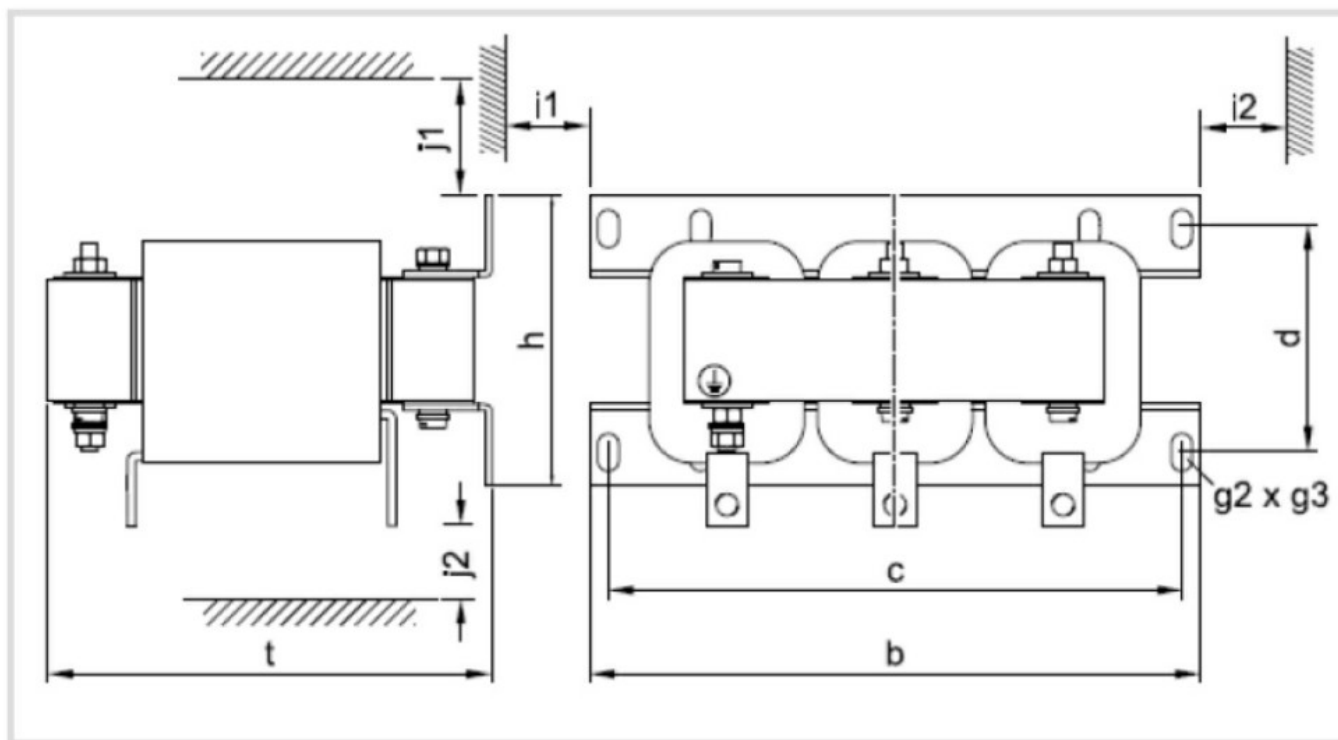

|           | b    | h   | t   | c   | d     | g2 x g3 | i1, i2 | j1, j2 | <br>[kg] |
|-----------|------|-----|-----|-----|-------|---------|--------|--------|-----------------------------------------------------------------------------------------------|
|           | [mm] |     |     |     |       |         |        |        |                                                                                               |
| VLBX L330 | 267  | 115 | 205 | 249 | 78.5  | 7 x 13  | 30     | 100    | 11.5                                                                                          |
| VLBX L300 | 267  | 139 | 205 | 249 | 102.5 |         |        |        | 16.5                                                                                          |
| VLBX L190 | 291  | 149 | 215 | 273 | 116.5 | 10 x 18 |        |        | 22.5                                                                                          |
| VLBX L140 | 352  | 144 | 265 | 328 | 103.5 | 10 x 16 |        |        | 25.0                                                                                          |

#### Wiring diagrams

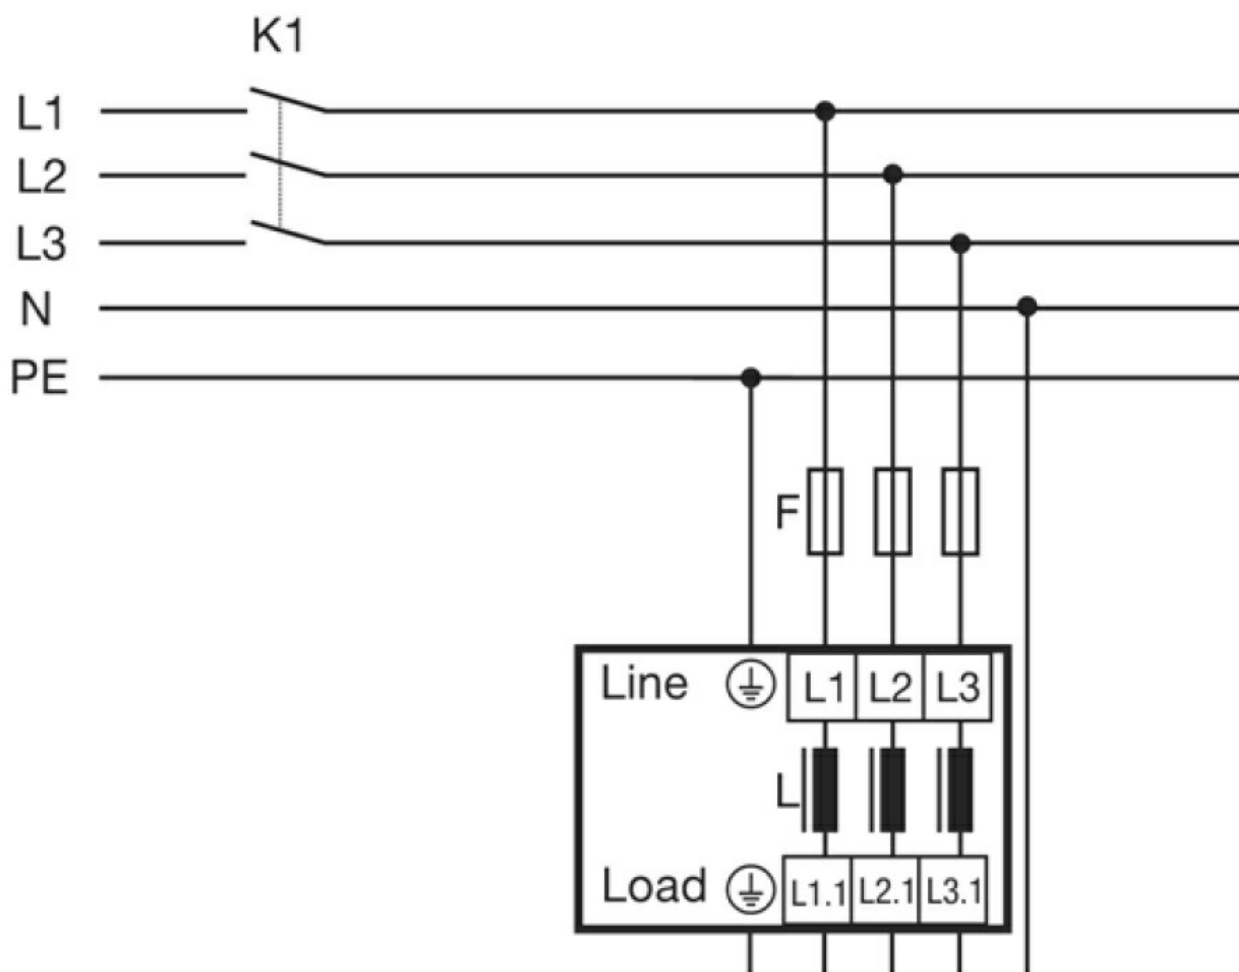

## Certifications and compliance

### Compliance

IEC/EN/BS 61558-1

### ETIM classification

ETIM 8.0

EC002565 -  
Filter circuit coil  
for low-voltage