



Product designation

Product type designation

Changeover
contactor
assemblies
BGC09

Electrical features

Maximum operating current ($\leq 440\text{V}$)

A 20

Contact characteristics

Operational current $I_{e,op}$

AC-1 ($\leq 40^{\circ}\text{C}$)	A	20
------------------------------------	---	----

AC-1 ($\leq 55^{\circ}\text{C}$)	A	18
------------------------------------	---	----

AC-1 ($\leq 60^{\circ}\text{C}$)	A	15
------------------------------------	---	----

Rated operational power AC-1 ($T \leq 40^{\circ}\text{C}$)

230V kW 8

400V kW 14

500V kW 16

690V kW 22

UL technical data

UL/CSA General Use

A 20

Mechanical features


Terminals type

Clamp screw


Weight

g	365
---	-----

Dimensions

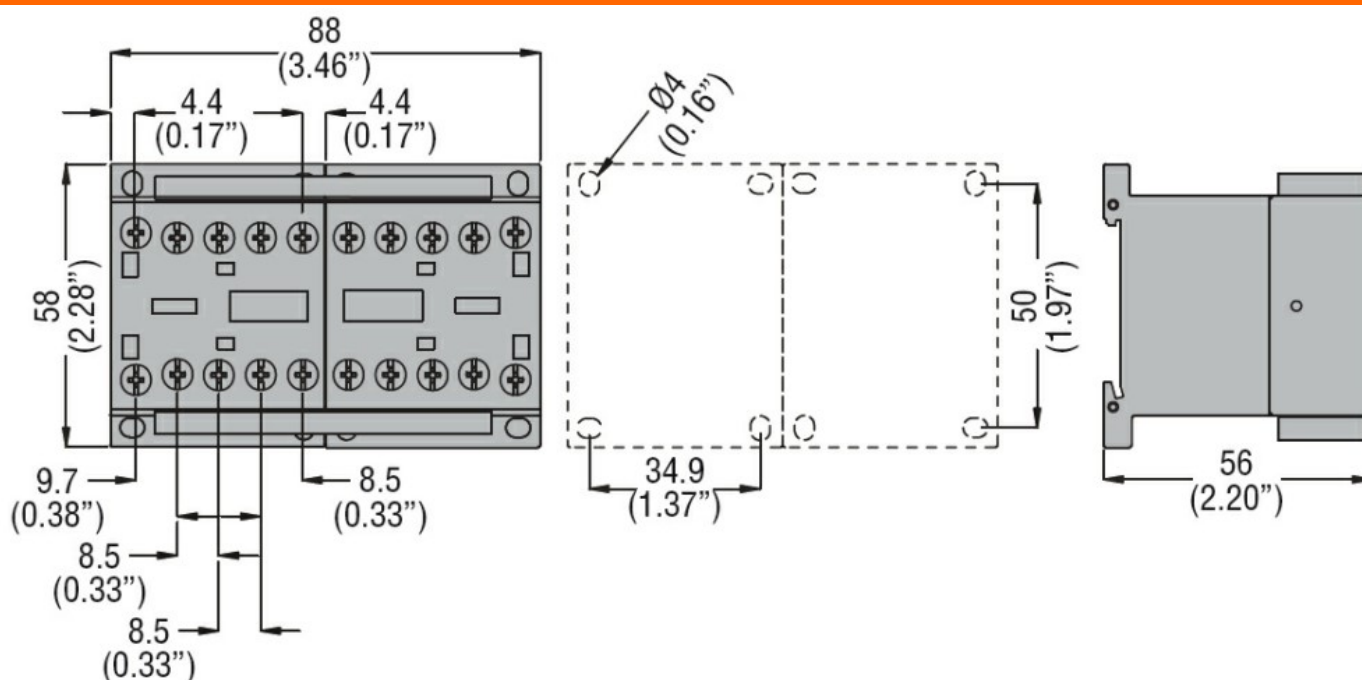

Wiring diagrams

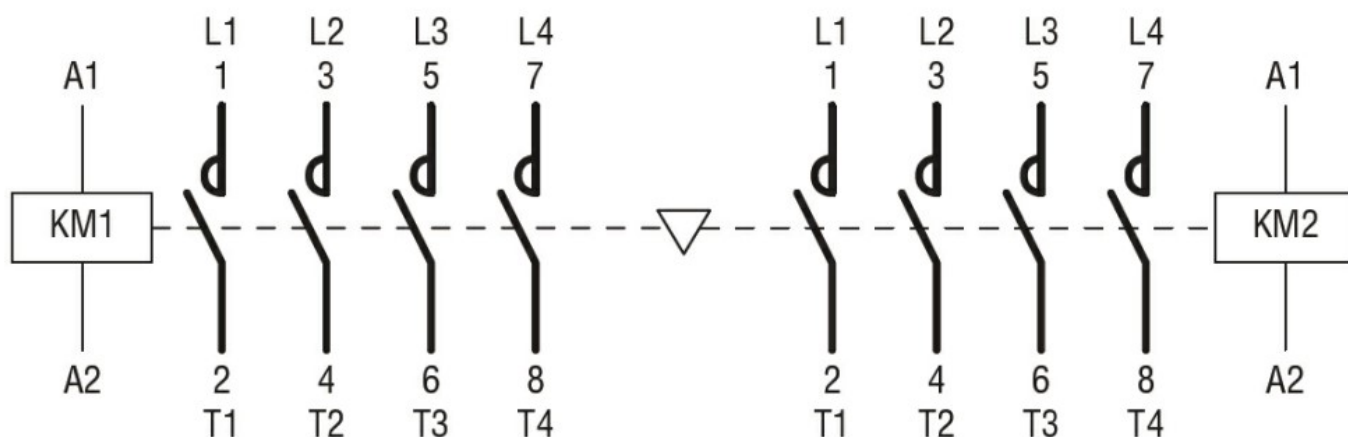

Certifications and compliance

Compliance

IEC/EN 60947-1

IEC/EN 60947-4-1

UL508 CSA C22.2 n° 14

Certificates

cULus

ETIM classification

ETIM 8.0

EC000010 -
Combination of
contactors