



| | |
|--------------------------|----------------------------|
| Product designation | Push-push button actuators |
| Product type designation | LPCQ20 |

General characteristics

| | |
|--------------------------|---------------------------------------|
| Colour | Blue |
| Type of positions | Extended pushbutton. Push on-push off |
| Material | Polyamide |
| IEC degree of protection | IP66, IP67 and IP69K |

Mechanical features

| | | |
|---------------------------------------|--------|------------------------------|
| Operating force | kg-lb | <0.5Kg / 1.1lb |
| Mechanical life - Push-Push actuators | cycles | 500000 |
| Fixing | | Without mounting adapter |
| Mounting adapter | | LPXC10A (1EM) / LPXC01 (1NC) |
| Weight | g | 27 |


UL technical data

| | |
|-------------------------|------------------------------|
| UL degree of protection | Type1, 2, 3R, 4, 4X, 12, 12K |
|-------------------------|------------------------------|

Ambient conditions

| | | | |
|-----------------------|-----|----|-----|
| Temperature | | | |
| Operating temperature | | | |
| | min | °C | -25 |
| | max | °C | +70 |
| Storage temperature | | | |
| | min | °C | -40 |
| | max | °C | +85 |

Dimensions

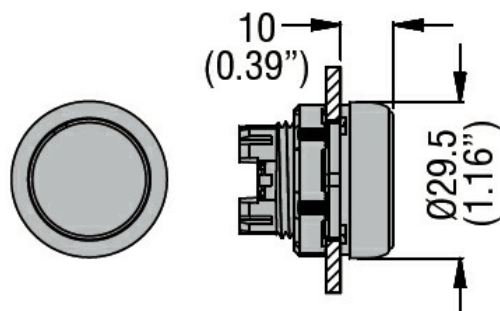

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

Certificates

CCC

cULus

EAC

RINA

ETIM classification

ETIM 8.0

EC000221 -
Front element for
push button