



Product designation

Selector switch
actuator key - 3
position
LPFS33

Product type designation

General characteristics

Colour

Black

Type of positions

1 - 0 - 2, key
extraction in 1
and 0 and 2

Material

Aluminium and
zinc alloy for the
metal part,
polyamide for
plastic parts

IEC degree of protection

IP66, IP67 and
IP69K

Mechanical features

Mechanical life

cycles 1000000

Fixing

Without mounting
adapter

Mounting adapter

LPXAU120M

UL technical data

UL degree of protection

Type1, 2, 3R, 4,
4X, 12, 12K

Ambient conditions

Temperature


Operating temperature

min	°C	-25
max	°C	+70

Storage temperature

min	°C	-40
max	°C	+85

Dimensions

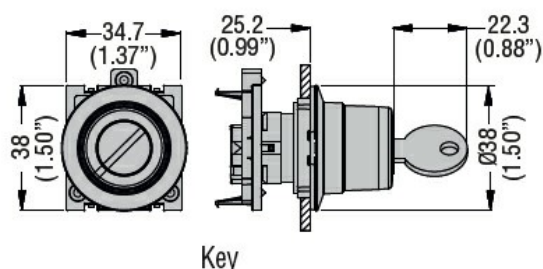

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

Certificates

cULus

ETIM classification

ETIM 8.0

EC002611 -
Control switch