



Product designation

Direct-on-line
starter

Product type designation

M2P00911

Electrical features

Relay adj range	A	9-14
-----------------	---	------

IEC technical characteristics ($\leq 440V$)

I _e	A	13
kW	kW	5.5

Mechanical features

Weight	g	1515
--------	---	------

Ambient conditions

Operating temperature	min	°C	-25
	max	°C	+60


Storage temperature

min	°C	-40
max	°C	+70

Resistance & Protection


Frontal IP degree	IP65
-------------------	------

Dimensions

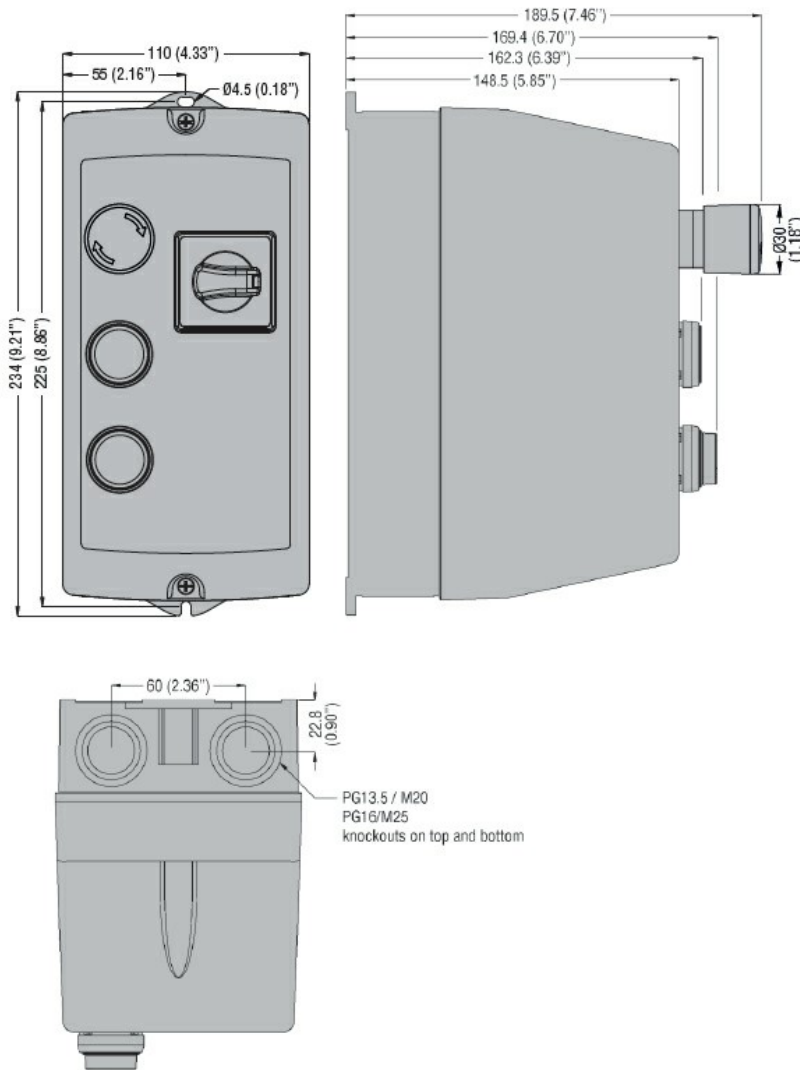


Wiring diagrams

Incorporated button control
and rotary actuator for 3-phase motors

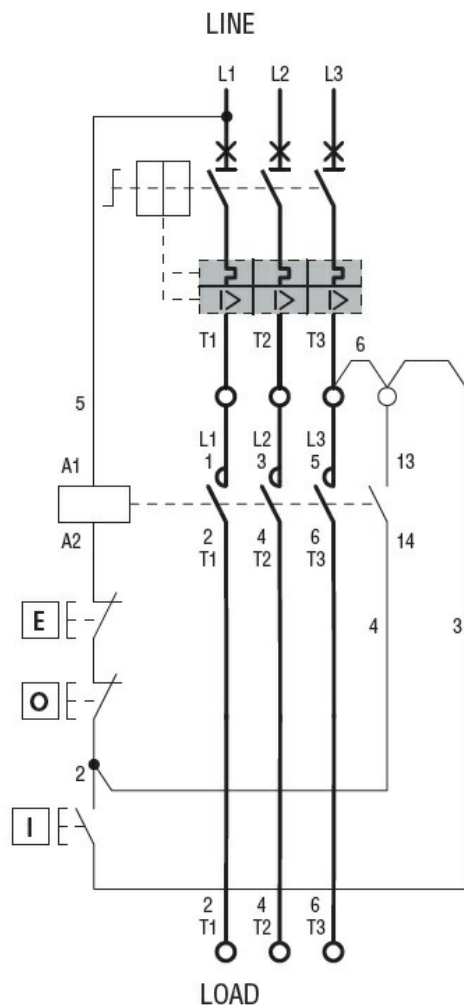

I = Start; O = Stop; E = Emergency Stop

Power
connection for 1-phase
motors

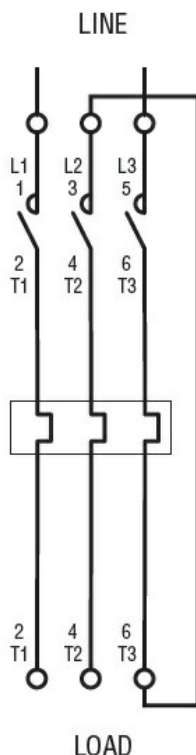

Certifications and compliance

Compliance

IEC/EN 60947-1

IEC/EN 60947-4-1

Certificates

EAC

ETIM classification

ETIM 8.0

EC001037 -
Motor
starter/Motor
starter
combination