



#### Caratteristiche elettriche

Corrente d'impiego max ( $\leq 440V$ ) A 9

#### Caratteristiche dei contatti

Corrente di impiego Ie AC-3 ( $\leq 440V \leq 55^{\circ}C$ ) A 9

Potenza nominale AC-3 ( $T \leq 55^{\circ}C$ )	V	kW	Value
	230V	kW	2.2
	400V	kW	4
	415V	kW	4.3
	440V	kW	4.5
	500V	kW	5
	690V	kW	5

Contatti ausiliari incorporati

NA	1
NC	0

#### Dati tecnici UL

Maximum UL/CSA horsepower ratings single-phase	V	HP	Value
	110V-120V	HP	0.5
	220V-240V	HP	1.5


Maximum UL/CSA horsepower ratings three-phase, 3-pole	V	HP	Value
	200V-208V	HP	2
	220V-240V	HP	3
	440V-480V	HP	5
	550V-600V	HP	5

#### Caratteristiche meccaniche


Attacchi tipo Vite di fissaggio

Peso prodotto g 445

#### Dimensioni

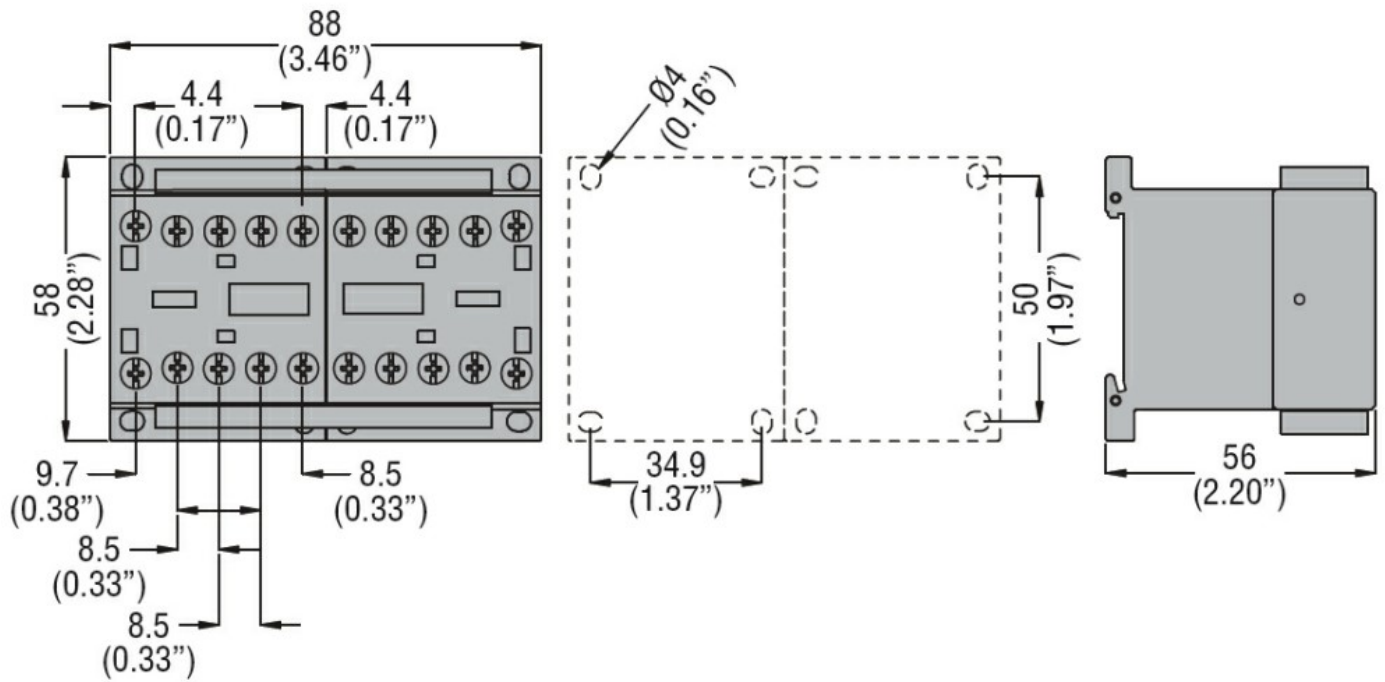

**Schemi elettrici**

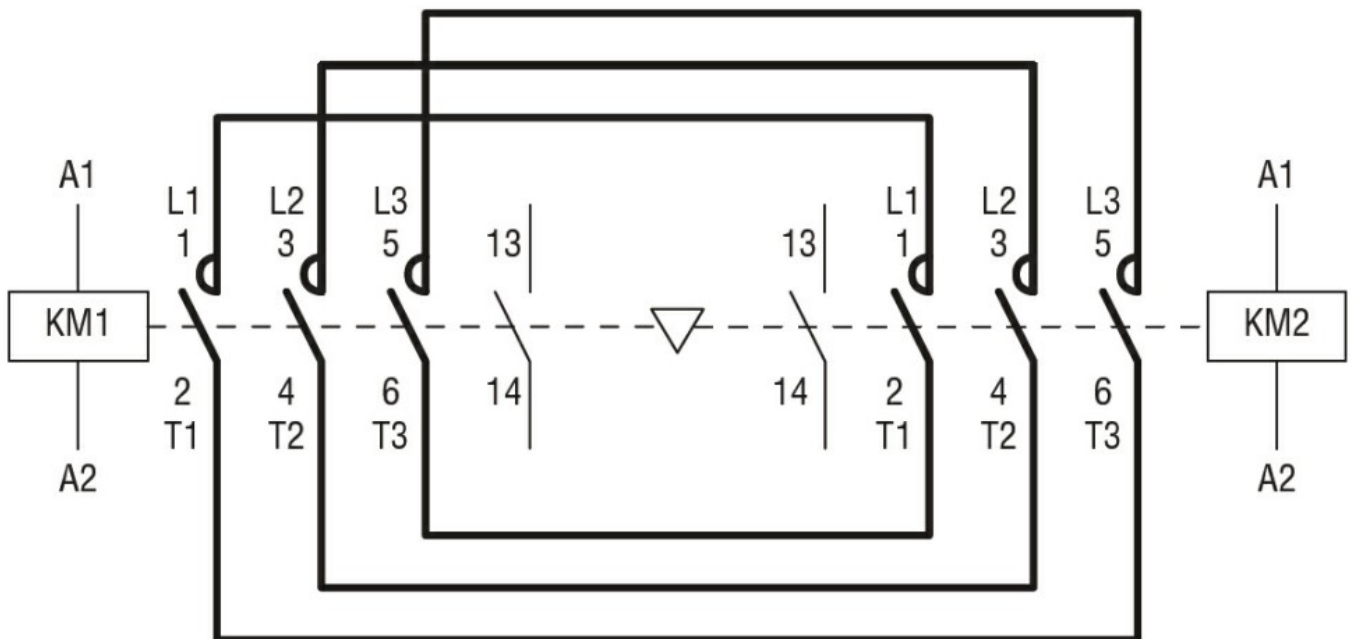

**Omologazioni e conformità**

**Conformità**

IEC/EN 60947-1  
IEC/EN 60947-4-1  
UL508 CSA C22.2 n° 14

**Omologazioni**

cULus

**Classificazione ETIM**

ETIM 8.0

EC001037 -  
Combinazione  
starter motore