



Mechanical features

Weight g 245

Operations

Mechanical life cycles 100000

Ambient conditions

Temperature

Operating temperature

min	°C	-25
max	°C	+60


Storage temperature

min	°C	-50
max	°C	+80

IEC degree of protection	IP65
--------------------------	------

UL degree of protection	4X
-------------------------	----

Dimensions

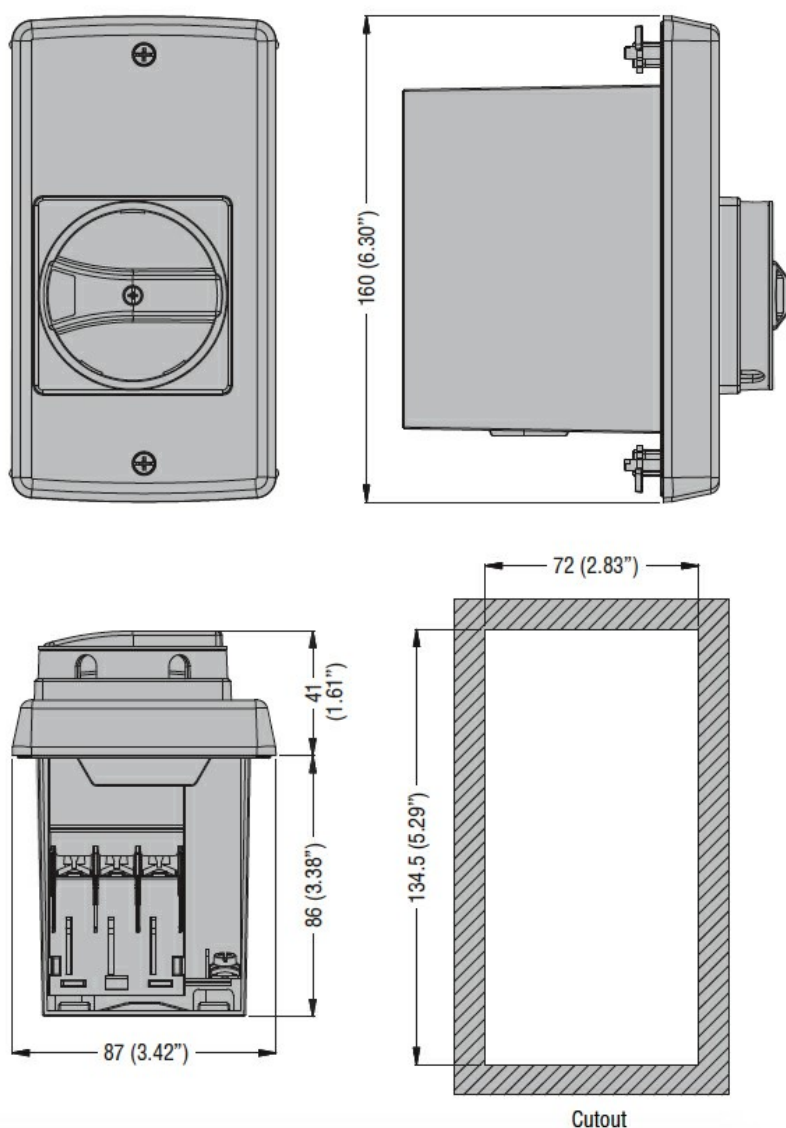

Cutout

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

cULus

EAC

ETIM classification