



Contact characteristics

Tightening torque for terminals	min	Ibin	9
	max	Ibin	9
Tightening torque for coil terminal	min	Ibin	9
	max	Ibin	9


Mechanical features

Fixing	For reversing and changeover assemblies
--------	---


UL technical data

Rated operational voltage AC (UL)	V	600
-----------------------------------	---	-----

Dimensions

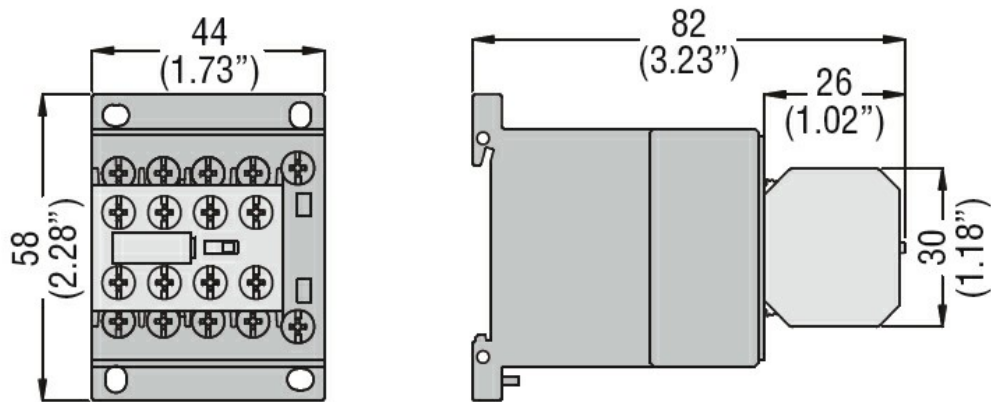

Wiring diagrams

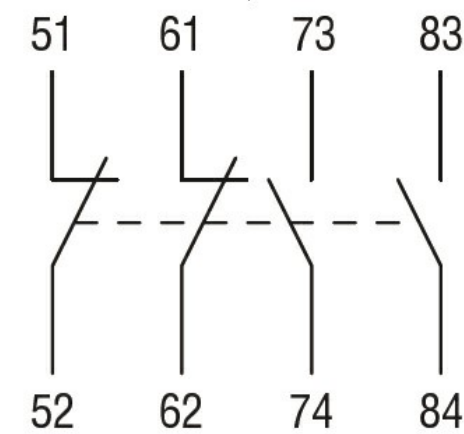

Certifications and compliance

Compliance	CSA C22.2 n° 60947-1
	CSA C22.2 n° 60947-5-1
	IEC/EN 60947-1

IEC/EN 60947-5-1

UL 60947-1

UL 60947-5-1

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000041 -  
Auxiliary contact  
block