

|                                                        |  |  |                                                                                        |    |     |
|--------------------------------------------------------|--|--|----------------------------------------------------------------------------------------|----|-----|
| Product designation                                    |  |  | Rotary cam switches                                                                    |    |     |
| Product type designation                               |  |  | 7GN12                                                                                  |    |     |
| General characteristics                                |  |  |                                                                                        |    |     |
| Switching diagram                                      |  |  | 54 - Changeover switch without 0 1 pole                                                |    |     |
| N° of elements                                         |  |  | 1                                                                                      |    |     |
| Mounting form                                          |  |  | U12 - Front mounting without front plate with key operation for hole diam. 22mm fixing |    |     |
| Contact characteristics                                |  |  |                                                                                        |    |     |
| Rated insulation voltage Ui                            |  |  | IEC/EN                                                                                 | V  | 690 |
|                                                        |  |  | UL/CSA                                                                                 | V  | 600 |
| Rated impulse withstand voltage Uimp                   |  |  |                                                                                        | kV | 6   |
| Conventional free air thermal current Ith              |  |  | IEC/EN                                                                                 | A  | 16  |
|                                                        |  |  | UL/CSA                                                                                 | A  | 15  |
| Rated operational voltage                              |  |  |                                                                                        | V  | 480 |
| Rated operational impulse voltage                      |  |  |                                                                                        | kV | 4   |
| Maximum fuse size for short-circuit protection In (gG) |  |  | 10kA                                                                                   | A  | 16  |
|                                                        |  |  | 15kA                                                                                   | A  | 10  |
|                                                        |  |  | 25kA                                                                                   | A  | 10  |
| Rated short time current Icw                           |  |  | 1s                                                                                     | kA | 200 |
| Conductivity                                           |  |  | 10/5 mA/V                                                                              |    |     |
| Operational current Ie IEC/EN                          |  |  |                                                                                        |    |     |
| AC1/AC21A                                              |  |  |                                                                                        | A  | 16  |
| AC15                                                   |  |  | 110V                                                                                   | A  | 10  |
|                                                        |  |  | 220/230V                                                                               | A  | 8   |
|                                                        |  |  | 380/400V                                                                               | A  | 4   |
|                                                        |  |  | 660/690V                                                                               | A  | 1.5 |
| Rated operational power in AC                          |  |  |                                                                                        |    |     |
| Three-phase AC-3                                       |  |  | 220/230V                                                                               | kW | 2.5 |
|                                                        |  |  | 380/440V                                                                               | kW | 4   |
|                                                        |  |  | 500/690V                                                                               | kW | 5.5 |
| Single-phase AC-3                                      |  |  | 110V                                                                                   | kW | 0.8 |
|                                                        |  |  | 220/230V                                                                               | kW | 1.5 |
|                                                        |  |  | 380/440V                                                                               | kW | 2.2 |
| Three-phase AC23A                                      |  |  | 220/230V                                                                               | kW | 3   |
|                                                        |  |  | 380/440V                                                                               | kW | 5.5 |
|                                                        |  |  | 500/690V                                                                               | kW | 7.5 |
| Single-phase AC23A                                     |  |  | 110V                                                                                   | kW | 0.8 |


|                                        |      |                 |        |                   |
|----------------------------------------|------|-----------------|--------|-------------------|
|                                        |      | 220/230V        | kW     | 1.7               |
|                                        |      | 380/440V        | kW     | 3                 |
| Rated operational current in DC        |      |                 |        |                   |
| DC21A                                  |      |                 |        |                   |
|                                        |      | 48V             | A      | 12                |
|                                        |      | 60V             | A      | 12                |
|                                        |      | 110V            | A      | 4                 |
|                                        |      | 220V            | A      | 0.6               |
|                                        |      | 440V            | A      | 0.25              |
| DC23A (poles in series)                |      |                 |        |                   |
|                                        |      | 24V             | A      | 10 (1)            |
|                                        |      | 48V             | A      | 10 (2)            |
|                                        |      | 60V             | A      | 10 (3)            |
|                                        |      | 110V            | A      | 5 (3)             |
|                                        |      | 220V            | A      | 5 (4)             |
| DC13                                   |      |                 |        |                   |
|                                        |      | 24V             | A      | 12                |
|                                        |      | 48V             | A      | 10                |
|                                        |      | 60V             | A      | 8                 |
|                                        |      | 110V            | A      | 1                 |
|                                        |      | 220V            | A      | 0.4               |
|                                        |      | 440V            | A      | 0.15              |
| Power dissipation                      |      |                 | W      | 0.8               |
| Mechanical features                    |      |                 |        |                   |
| Terminals screw                        |      |                 |        | M3                |
| Tightening torque for terminals max    |      |                 | Nm     | 0.5               |
| Conductor size                         |      |                 |        |                   |
| AWG - Rigid cable                      |      |                 |        |                   |
|                                        | min  | AWG             |        | 20                |
|                                        | Max  | AWG             |        | 12                |
| AWG - Flexible cable                   |      |                 |        |                   |
|                                        | min  | AWG             |        | 20                |
|                                        | Max  | AWG             |        | 14                |
| Conductor size (IEC) - Flexible cable  |      |                 |        |                   |
|                                        | min  | mm <sup>2</sup> |        | 0.5               |
|                                        | Max  | mm <sup>2</sup> |        | 2.5               |
| Conductor size (IEC) - Rigid cable     |      |                 |        |                   |
|                                        | min  | mm <sup>2</sup> |        | 0.5               |
|                                        | Max  | mm <sup>2</sup> |        | 2.5               |
| Mechanical life                        |      |                 | cycles | 3x10 <sup>6</sup> |
| UL technical data                      |      |                 |        |                   |
| Motor power for direct-on-line control |      |                 |        |                   |
| for three-phase motor                  |      |                 |        |                   |
|                                        | 120V | HP              |        | 1.5               |
|                                        | 240V | HP              |        | 3                 |
|                                        | 480V | HP              |        | 50                |
|                                        | 600V | HP              |        | 40                |
| for single-phase motor                 |      |                 |        |                   |
|                                        | 120V | HP              |        | 0.5               |
|                                        | 240V | HP              |        | 1                 |
| Ambient conditions                     |      |                 |        |                   |
| Temperature                            |      |                 |        |                   |
| Operating temperature                  |      |                 |        |                   |
|                                        | min  | °C              |        | -25               |

|                     |     |    |     |
|---------------------|-----|----|-----|
| Storage temperature | max | °C | +55 |
|                     | min | °C | -40 |
|                     | max | °C | +70 |

#### Resistance & Protection


|                     |      |
|---------------------|------|
| Frontal IP degree   | IP40 |
| Terminals IP degree | IP00 |

#### Dimensions

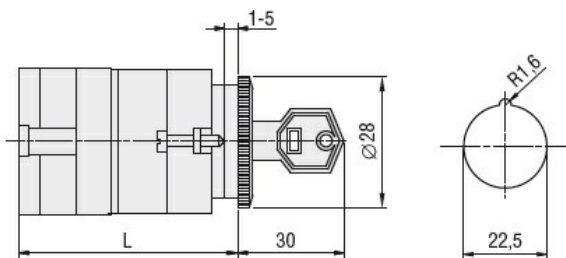

| Series | L    |      |        |       |
|--------|------|------|--------|-------|
|        | 1    | 2    | 3....8 |       |
| 7GN12  | 47   | 56.7 | 66.4   | 114.9 |
| 7GN20  | 47   | 56.7 | 66.4   | 114.9 |
| 7GN25  | 51.4 | 65   | 78.6   | 146.6 |

#### Wiring diagrams

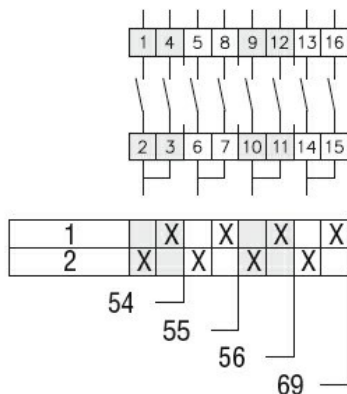

#### Certifications and compliance

##### Compliance

CSA C22.2 n° 14  
IEC/EN/BS 60947-1  
IEC/EN/BS 60947-3  
IEC/EN/BS 60947-5-1  
UL60947-4-1

##### Certificates

EAC  
UL

#### ETIM classification

ETIM 8.0

EC001029 -  
Selector switch,  
complete