

# PULSED OR CONTINUOUS SOUND MODULE COMPLETE WITH COVER. Ø70MM, 24VAC/DC, PULSED (90DB). IP54 PROTECTION. BLACK




Product designation


Signal tower Ø70mm/2.75" 8LT7S - Sound modules

# Product type designation


General characteristics			
Diameter		mm - inch	70 / 2.75
Supply voltage (AC)		V	24
Supply voltage (DC)		V	24
Colour			Black
IEC degree of protection			IP54
Sound module consumption (AC)		mΑ	25
Sound module consumption (DC)		mΑ	25
Sound intensity		dB	90
Mechanical features			
Weight		g	240
Ambient conditions			
Temperature			
Operating temperature			
	min	°C	-20
	max	°C	+50
Dimensions			

**ENERGY AND AUTOMATION** 

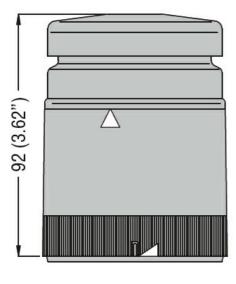



### Wiring diagrams

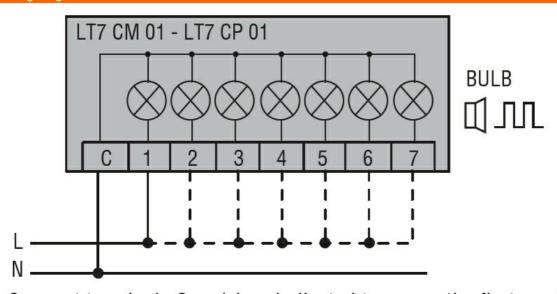

Connect terminals C and 1 as indicated to power the first module. If other modules are fitted, the respective terminals must be connected accordingly.

# Certifications and compliance

Compliance

CSA C22.2 n°14



**ENERGY AND AUTOMATION** 

#### 8LT7S0B

PULSED OR CONTINUOUS SOUND MODULE COMPLETE WITH COVER. Ø70MM, 24VAC/DC, PULSED (90DB). IP54 PROTECTION. BLACK

	IEC/EN 60947-1
	IEC/EN 60947-5-1
	UL508
Certificates	
	cULus
	EAC
ETIM classification	

ETIM classificatior

ETIM 8.0

EC001261 -Acoustic module for signal tower