



Product designation

Product type designation

Number of poles

Operating voltage type

Enclosed switch  
disconnecter  
GLZM  
Nr. 4  
AC

**Contact characteristics**

IEC Conventional free air thermal current I <sub>th</sub>	A	200
---	---	-----

Rated insulation voltage U <sub>i</sub> IEC/EN	V	1000
--	---	------

Rated impulse withstand voltage U <sub>imp</sub>	kV	12
--	----	----

Operating current I<sub>e</sub>

AC21A

400V	A	250
500V	A	250
690V	A	250

AC22A

400V	A	250
500V	A	250
690V	A	250

AC23A

400V	A	250
500V	A	250
690V	A	250

Power dissipation per pole max	W	6.5
--------------------------------	---	-----

Rated operational power AC23A

400V	kW	140
690V	kW	250

Conditional short-circuit current (rms)	kA	100
---	----	-----

Short-circuit protection with fuse	Class/A	gG/250
------------------------------------	---------	--------

Making capacity AC23A 400V	A	2500
----------------------------	---	------

Breaking capacity AC23A 400V	A	2000
------------------------------	---	------

Mechanical life	cycles	10000
-----------------	--------	-------

**Mechanical features**

Operating position

normal allowable	Vertical plan Any
---------------------	----------------------

Terminals

type	M8 x 25
------	---------

Tightening torque for terminals

min	Nm	15
max	Nm	22
min	lbin	132
max	lbin	194

Conductor section

IEC min	mm <sup>2</sup>	70
IEC max	mm <sup>2</sup>	185

AWG/kcmil min	00
AWG/kcmil max	400

#### Ambient conditions

Operating temperature

min	°C	-25
max	°C	+55

Storage temperature

min	°C	-40
max	°C	+70

Max altitude

m	3000
---	------

#### Resistance & Protection

Frontal IP degree

IP65


IP degree of protection

IP65

Pollution degree


3

#### Dimensions

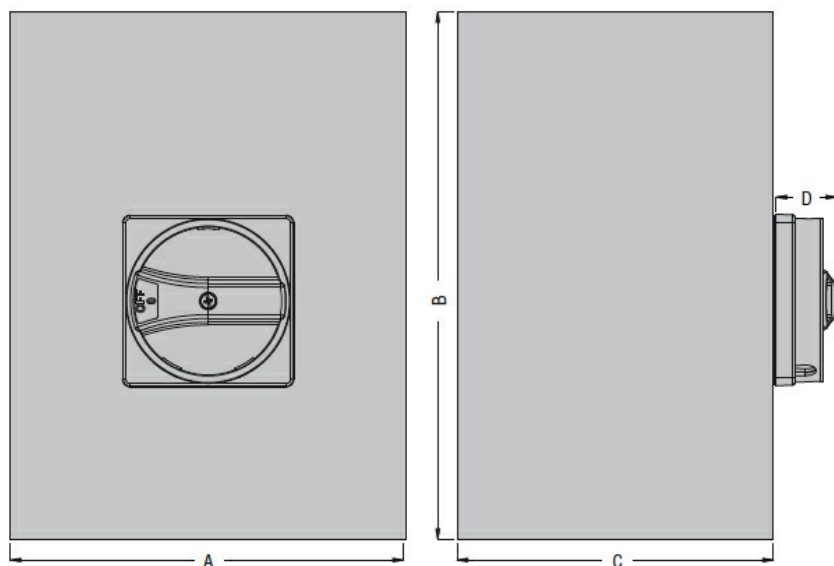

Type	A	B	C	D
GLZM0160...GLZM0315...	300 (11.81")	400 (15.75")	250 (9.84")	45,7 (1.80")

#### Wiring diagrams



#### Certifications and compliance

Compliance

IEC/EN 60947-1

IEC/EN 60947-3

#### ETIM classification

FOUR-POLE SWITCH DISCONNECTOR IN IEC/EN IP65 METAL ENCLOSURE. WITH  
ROTATING BLACK HANDLE, 200A. ENCLOSURE DIMENSIONS:  
300X400X250MM/11.8X15.8X9.8"

ETIM 8.0

EC000216 -  
Switch  
disconnecter