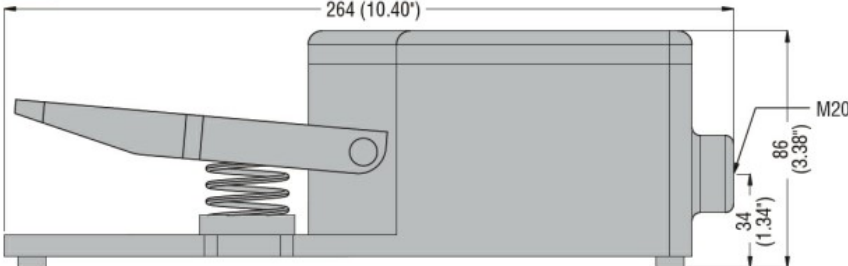
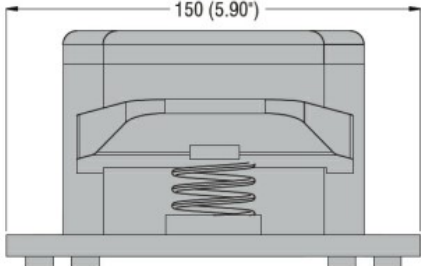


Product designation		One pedal, with pedal actuator lock - open	
Product type designation		KG120	
General characteristics			
Material		Housing	Polymer thermoplastic
Contact characteristics			
Type of contact		1NO+1NC Slow action	
Thermal current Ith		A	10
IEC/EN 60947-5-1 designation		A600 Q600	
Rated insulation voltage Ui		V	690
Rated impulse withstand voltage Uimp		kV	6
Insulation class		II	
Short-circuit protection with fuse		Class/A	10 gG fuse
IEC Conventional free air thermal current Ith		A	10
Resistance per pole (average value)		mΩ	<10
Mechanical features			
Tightening torque (Max)		Nm lbin	1 0.74lbft
Contact terminals			
Cable connection		Self-releasing screw terminal	
Cable entry		1 x M20	
Operations			
Mechanical life		cycles	>10000000
Ambient conditions			
Temperature			
Operating temperature		min °C max °C	-25 +70
Storage temperature		min °C max °C	-40 +70
Resistance & Protection			
IP degree		Terminals Body housing	IP20 IP54
Pollution degree		3	
Dimensions			
			
Certifications and compliance			
Compliance			

EN 60447.

IEC/EN 60204-1

IEC/EN 60947-1

IEC/EN 60947-5-1

Certificates

EAC

ETIM classification

ETIM 8.0

EC001258 - Foot
switch