



Product designation

Mechanical reset
buttons,
complete unit,
spring return
LPCR11

Product type designation

General characteristics

Colour	Blue (RESET)	
Type of positions	Mechanical reset flush pushbutton	
Material	Polyamide	
IEC degree of protection	IP66, IP67 and IP69K	

Mechanical features

Operating force	kg-lb	<0.5Kg / 1.1lb
Mechanical life	cycles	5000000
Fixing	Without mounting adapter	
Mounting adapter	LPXAU120	
Weight	g	28

UL technical data

UL degree of protection	Type1, 2, 3R, 4, 4X, 12, 12K
-------------------------	---------------------------------

Ambient conditions

Temperature


Operating temperature

min	°C	-25
max	°C	+70

Storage temperature

min	°C	-40
max	°C	+85

Dimensions

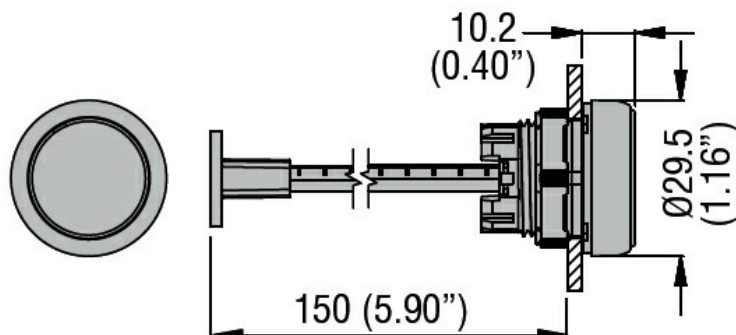

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1

MECHANICAL RESET BUTTON, COMPLETE UNIT, SPRING RETURN Ø22MM PLATINUM
SERIES CHROMED PLASTIC, FLUSH. ADJUSTABLE LENGTH 0...150MM/5.9IN, BLUE WITH
"RESET" CAPTION

IEC/EN/BS 60947-5-1

UL508

Certificates

CCC

cULus

EAC

RINA

ETIM classification

ETIM 8.0

EC000221 -
Front element for
push button