



Product designation

Direct-on-line
starter

Product type designation

M1P00912...A4

Electrical features

Relay adj range	A	0.63-1
IEC technical characteristics ($\leq 440V$)		
	I _e kW	A kW
	1	0.25

Components

Starter enclosure standard supplied	M1PA
Contactor standard supplied	BF0910A
Thermal relay standard supplied	RF380100

UL technical data

Maximum UL/CSA horsepower ratings three-phase, 3-pole	550V-600V	HP	0.5
---	-----------	----	-----

Mechanical features

Weight	g	1040
--------	---	------


Ambient conditions

Operating temperature	min	°C	-25
	max	°C	+60
Storage temperature	min	°C	-40
	max	°C	+70

Resistance & Protection

Frontal IP degree	IP65
-------------------	------

Dimensions

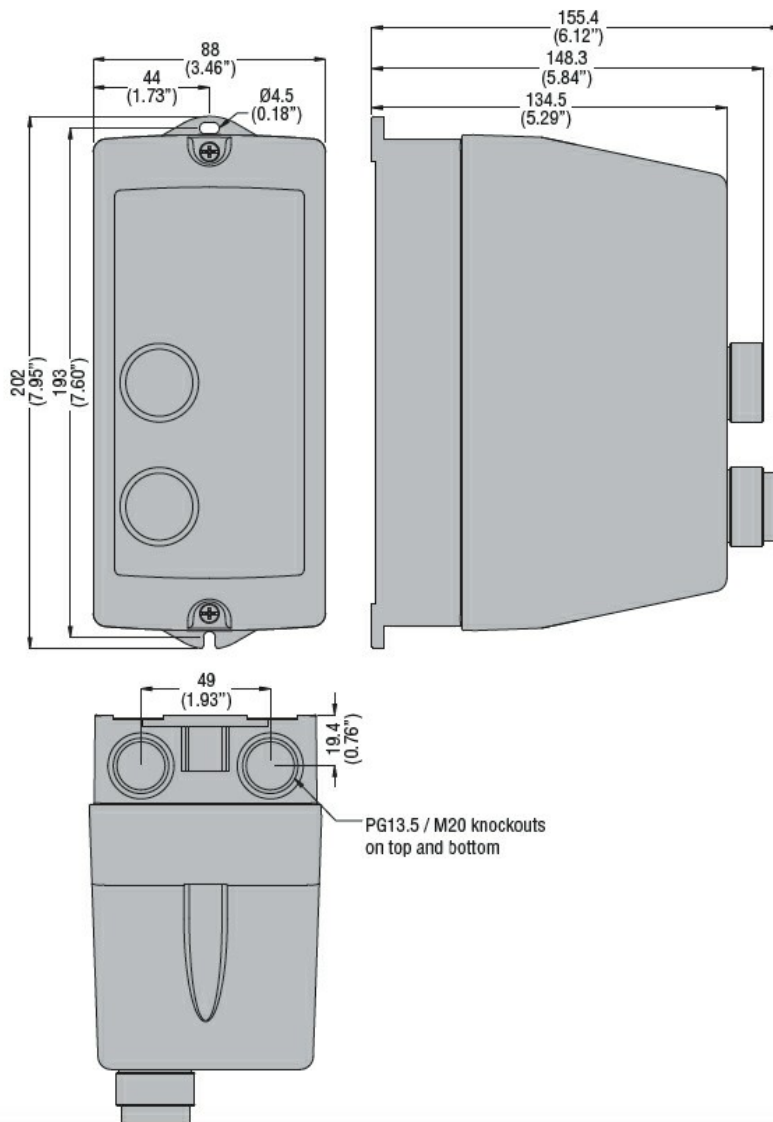

Wiring diagrams



I = Start; O = Stop/Reset

Certifications and compliance

Compliance

IEC/EN 60947-1
IEC/EN 60947-4-1
UL508 CSA C22.2 n° 14

Certificates

CSAus
cULus
EAC

ETIM classification

ETIM 8.0

EC001037 -
Motor
starter/Motor
starter
combination