



Product designation

Direct-on-line
starter

Product type designation

M3P06512...B7

Electrical features

Relay adj range	A	45-65
IEC technical characteristics ($\leq 440V$)		
	Ie	A
	65	
	kW	kW
	30	

Components

Starter enclosure standard supplied	M3PA
Contactor standard supplied	BF6500A
Thermal relay standard supplied	RF826500

UL technical data

Maximum UL/CSA horsepower ratings three-phase, 3-pole

200V-208V	HP	20
220V-240V	HP	25
440V-480V	HP	50
550V-600V	HP	60

Mechanical features

Weight	g	3760
--------	---	------

Ambient conditions

Operating temperature		
	min	°C
	-25	
	max	°C
	+60	




Storage temperature

	min	°C
	-40	
	max	°C
	+70	


Resistance & Protection

Frontal IP degree	IP65
-------------------	------

Dimensions

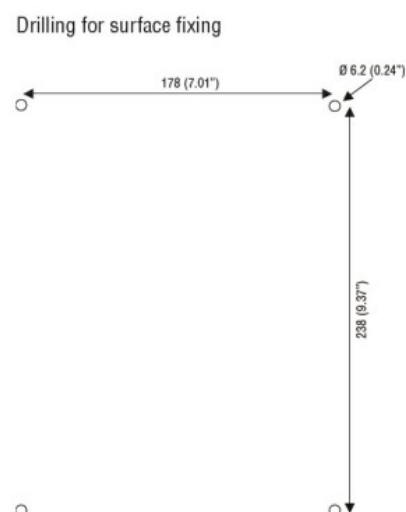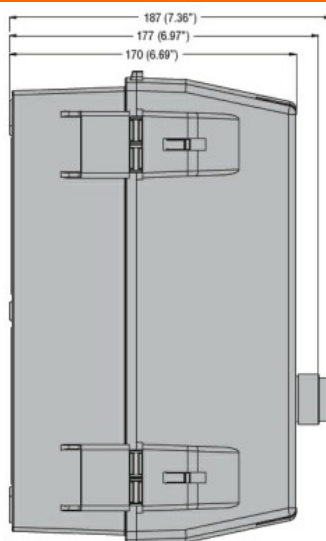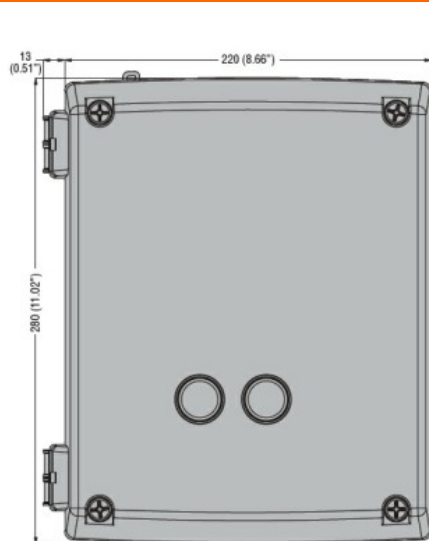

Wiring diagrams

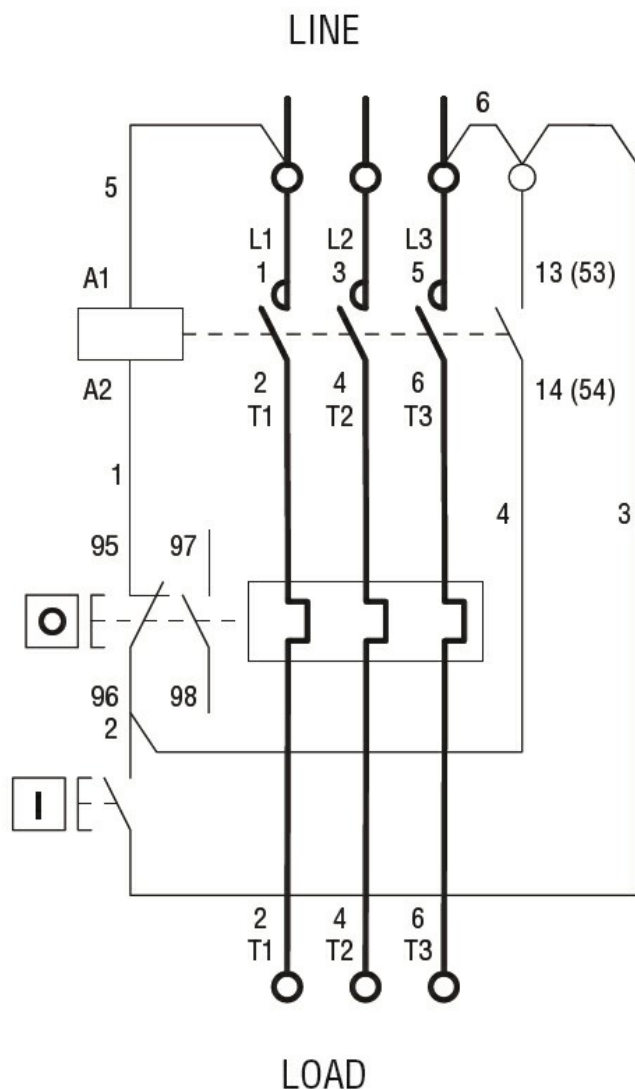

I = Start; O = Stop/Reset

Certifications and compliance

Certificates

EAC

ETIM classification

ETIM 8.0

EC001037 -
Motor
starter/Motor
starter
combination