





Rondò 1.1 - Rondò 1.2

Outdoor recessed / Incassi da esterno

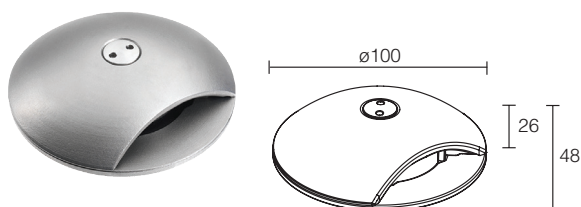

Rondò 1.1

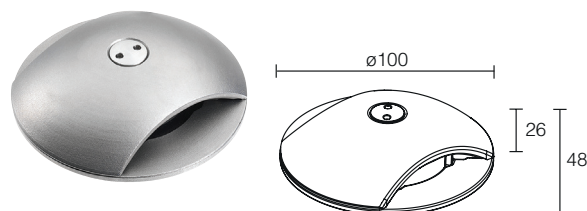

Rondò 1.2


DESCRIPTION

Recessed for outdoor applications single beam (Rondò 1.1), double beam (Rondò 1.2); driveover up to 5000 kg; recessed (floor); body in AISI 316L stainless steel, screen in Rilsan® Clear; finishes: anthracite, cor-ten, micro blasted, RAL on request; 1 power LED; 2W - 24Vdc; built in power supply unit; includes 1.5 m neoprene cable, H05RN-F 2x0.35/0.75 Ø6.3 mm; lumen output at source: 185 lm (3000K); total delivered lumens: 65 lm (3000K, radial optics); optics: radial, 10°; LED colour: white - 2700K, 3000K, 4000K; ingress protection: IP67; impact resistance: IK08; equipped with IPS; operating temperature: -20°C +45°C; max luminaire temperature: 45°C (Ta 25°C); photobiological safety: risk group 1 in accordance with EN62471:2006; appliance class: III; weight 0.60 kg; dimensions ø100x48 mm; dimming using a 24Vdc dimmer; accessories: outer casing WC0100, outer casing WC0103, outer casing WC0150, tool for vandal-resistant screws WE0100.

DESCRIZIONE


Incasso da esterno monoemissione (Rondò 1.1), biemissione (Rondò 1.2); carrabile fino a 5000 kg; a incasso (pavimento); corpo in acciaio inox AISI 316L, schermo in Rilsan® Clear; finiture: antracite, cor-ten, microsabbato, RAL previa richiesta; 1 power LED; 2W - 24Vdc; alimentatore integrato; incluso cavo in neoprene di 1,5 m H05RN-F 2x0,35/0,75 Ø6,3 mm; flusso sorgente: 185 lm (3000K); flusso totale: 65 lm (3000K, ottica radiale); ottiche: radiale, 10°; colore LED: bianco - 2700K, 3000K, 4000K; grado di protezione: IP67; grado di resistenza: IK08; dotato di sistema IPS; temperatura di esercizio: -20°C +45°C; temperatura max apparecchio: 45°C (Ta 25°C); sicurezza fotobiologica: gruppo rischio 1 secondo EN62471:2006; classe di isolamento III; peso 0,60 kg; dimensioni ø100x48 mm; dimmerazione disponibile mediante dimmer in linea 24Vdc; accessori: cassaforma WC0100, cassaforma WC0103, cassaforma WC0150, chiave per vite antivandalo WE0100.

For installation / Per installazione




WC0100

Outer casing / *Cassaforma*



WC0103

Outer casing / *Cassaforma*



WC0150

Outer casing / *Cassaforma*

Spare parts / Ricambi



WE0100

Tool for vandal-resistant screws / *Chiave per vite antivandalo*

Cables / Cavi

WF8405* - 5 m

WF8410* - 10 m

WF8415* - 15 m

WF8420* - 20 m

Neoprene cables / *Cavi in neoprene*
H05RN-F 2x0,35/0,75 Ø6,3 mm - IPS

*order together with the lighting fixture /
da ordinare contestualmente all'apparecchio illuminante