


## Dati tecnici / Technical data

Installazione / Installation	profilo lineare da esterno	linear profile for outdoor applications
Montaggio / Mounting	a incasso (soffitto, parete, pavimento)	recessed (ceiling, wall, floor)
Materiale / Material	acciaio inox, PMMA	stainless steel, PMMA
N° e tipo LED / No. and type of LED	Rio 2.1: 96 SMD low power LED Rio 2.2: 192 SMD low power LED Rio 2.4: 384 SMD low power LED	Rio 2.1: 96 SMD low power LEDs Rio 2.2: 192 SMD low power LEDs Rio 2.4: 384 SMD low power LEDs
Potenza nomin. assorbita / Nom. power consumption	Rio 2.1: 10W Rio 2.2: 19W Rio 2.4: 38W	Rio 2.1: 10W Rio 2.2: 19W Rio 2.4: 38W
Alimentazione / Power supply	24Vdc	24Vdc
Alimentatore / Power supply unit	non incluso	not included
Cavi di alimentazione / Power cables	incluso cavo in neoprene di 1,5 m H05RN-F 2x0,35/0,75 Ø6,3 mm	includes 1,5 m neoprene cable, H05RN-F 2x0,35/0,75 Ø6,3 mm
Flusso totale apparecchio / Total delivered lumens	Rio 2.1: 290 lm (2800K) Rio 2.2: 580 lm (2800K) Rio 2.4: 1160 lm (2800K)	Rio 2.1: 290 lm (2800K) Rio 2.2: 580 lm (2800K) Rio 2.4: 1160 lm (2800K)
Ottiche / Optics	diffusa	diffuse
Colore LED / LED colour	bianco: 2600K, 2800K, 3700K	white: 2600K, 2800K, 3700K
Grado di protezione / Ingress protection	IP67	IP67
Grado di resistenza / Impact resistance	IK10	IK10
Classe di consumo energetico / Energy efficiency class	A / A+ / A++ (modulo LED integrato) in accordo con UE874/2012	A / A+ / A++ (built-in LED lamps) in accordance with EU/874/2012
Caratteristiche / Features	apparecchio carrabile fino a 5000 kg	lighting fixture can withstand weights of up to 5.000 kg


## Accessori / Accessories

### Per installazione / For installation



**WC8221** - 514 mm - Rio 2.1  
**WC8222** - 1016 mm - Rio 2.2  
**WC8224** - 2018 mm - Rio 2.4

Cassaforma in alluminio / Aluminium outer casing




**WC8251** - 513 mm - Rio 2.1  
**WC8252** - 1015 mm - Rio 2.2  
**WC8254** - 2017 mm - Rio 2.4

Cassaforma in acciaio inox / Stainless steel outer casing

### Cavi / Cables

**WF5205** - 5 m  
**WF5210** - 10 m  
**WF5215** - 15 m  
**WF5220** - 20 m

Cavi in neoprene / Neoprene cables  
H05RN-F 2x0,35/0,75 Ø6,3 mm  
IPS



**WC8421** - 514 mm - Rio 2.1  
**WC8422** - 1016 mm - Rio 2.2  
**WC8424** - 2018 mm - Rio 2.4

Cassaforma in alluminio per cartongesso /  
Aluminium outer casing for plasterboard


Per ricambi vedi p. 627 / For spare parts, see p. 627



**WN8102** Kit anticaduta /  
Anti-fall kit

**WN8010** Kit di allineamento  
cassaforme  
in alluminio /  
Alignment kit for  
aluminium outer  
casings

**WN8011** Kit di allineamento  
cassaforme in  
acciaio inox /  
Alignment kit for  
stainless steel  
outer casings

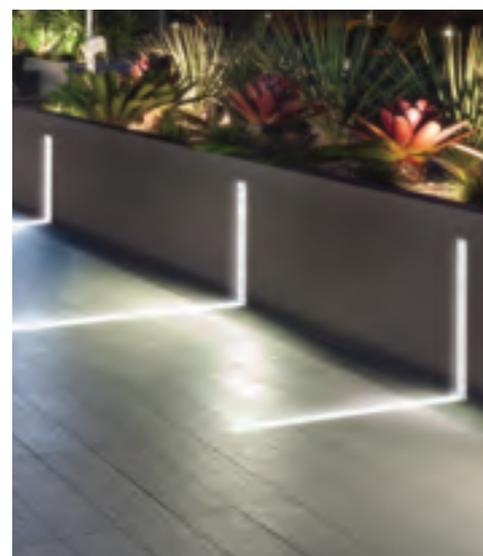

/ Rio 2, 3700K, lunghezze speciali / customized lengths

## Alimentatori / Power supply units

N° max prodotti / fixtures	PSU	IP	Pagina / Page
1...n	24Vdc	20	595
1...n	24Vdc	67	595