


## Data sheet

### 016P3PE22F

Pulsante di abilitazione, 3 posizioni, impugnatura ergonomica, 2 N.O.+2 N.C., terminali Faston 2.8x0.5

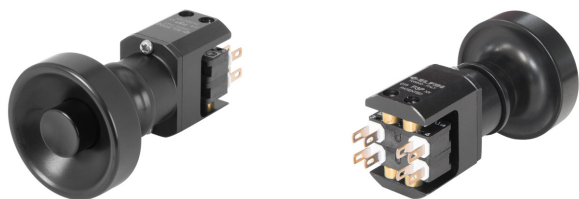

## Features

|                   |                                                                                                        |
|-------------------|--------------------------------------------------------------------------------------------------------|
| Range             | 016 Pulsanti di abilitazione ed Accessori                                                              |
| Product           | Pulsanti di abilitazione a 3 posizioni Ø 16 mm                                                         |
| Type              | Impugnatura ergo, terminale faston                                                                     |
| Item code         | 016P3PE22F                                                                                             |
| Description       | Pulsante di abilitazione, 3 posizioni, impugnatura ergonomica, 2 N.O.+2 N.C., terminali Faston 2.8x0.5 |
| Colour            | Nero                                                                                                   |
| Weight - gr       | 70,000                                                                                                 |
| Custom tariff no. | 85365080                                                                                               |
| GTIN              | 8052878001902                                                                                          |

## Technical data

|                                       |                                                   |
|---------------------------------------|---------------------------------------------------|
| Approvals                             | CE, (UL-CSA Microswitch only)                     |
| Compliance with standards             | IEC-EN60947-5-8, IEC-EN60204-1, IEC-EN11161       |
| Operating temperatures                | -30° ÷ +70°C                                      |
| Protection degree                     | IP40 - IP66 with 016GP28+020CGS (IEC-EN60529)     |
| Protection against impact             | IK06 (IEC-EN62262)                                |
| Mechanical durability                 | Position 1-2: 1.000.000 operations                |
| Mechanical durability                 | Position 2-3: 500.000 operations                  |
| Safety Parameters                     | B10d:1.000.000 oper. pos.2-3 (UNI-EN-ISO 13849-1) |
| Fixing diameter                       | 16.5mm - Thickness 1÷6mm                          |
| Rated insulation voltage              | Ui 300V - Uimp 2.5KV (EN-IEC60947-1)              |
| Overvoltage category                  | Class I (IEC-EN61140)                             |
| Microswitches electrical ratings      | Vn 250V max AC-DC, In 5Amax, Ith 10A, Ui 300V     |
| Microswitches electrical performances | 20.000 operations with load 250V-5A-cosphi 0.8    |
| Actuating forces                      | Position 1-2: 10N Position 2-3: 25N               |
| Microswitch                           | 1NO - 1NC change over, snap action                |
| Warranty period                       | 18 months                                         |

Data sheet

016P3PE22F

Pulsante di abilitazione, 3 posizioni, impugnatura ergonomica, 2 N.O.+2 N.C., terminali Faston 2.8x0.5



Technical drawings

