


Data sheet

016P3PE33F

Pulsante di abilitazione, 3 posizioni, impugnatura ergonomica, 3 N.O.+3 N.C., terminali Faston 2.8x0.5

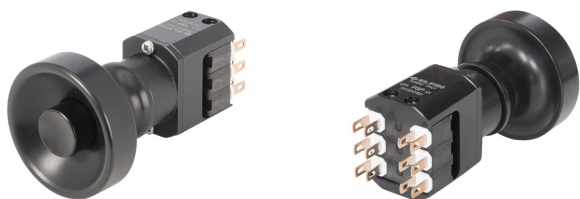

Features

Range	016 Pulsanti di abilitazione ed Accessori
Product	Pulsanti di abilitazione a 3 posizioni Ø 16 mm
Type	Impugnatura ergo, controllo di posizione, terminale faston
Item code	016P3PE33F
Description	Pulsante di abilitazione, 3 posizioni, impugnatura ergonomica, 3 N.O.+3 N.C., terminali Faston 2.8x0.5
Colour	Nero
Weight - gr	65,000
Custom tariff no.	85365080
GTIN	8052878001919

Technical data

Approvals	CE, (UL-CSA Microswitch only)
Compliance with standards	IEC-EN60947-5-8, IEC-EN60204-1, IEC-EN11161
Operating temperatures	-30° ÷ +70° C
Protection degree	IP40 - IP66 with 016GP28+020CGS (IEC-EN60529)
Protection against impact	IK06 (IEC-EN62262)
Mechanical durability	Position 1-2: 1.000.000 operations
Mechanical durability	Position 2-3: 500.000 operations
Safety Parameters	B10d:1.000.000 oper. pos.2-3 (UNI-EN-ISO 13849-1)
Fixing diameter	16.5mm - Thickness 1÷6mm
Rated insulation voltage	Ui 300V - Uimp 2.5KV (EN-IEC60947-1)
Overvoltage category	Class I (IEC-EN61140)
Microswitches electrical ratings	Vn 250V max AC-DC, In 5Amax, Ith 10A, Ui 300V
Microswitches electrical performances	20.000 operations with load 250V-5A-cosphi 0.8
Actuating forces	Position 1-2: 10N Position 2-3: 25N
Microswitch	1NO - 1NC change over, snap action
Warranty period	18 months


Data sheet

016P3PE33F

Pulsante di abilitazione, 3 posizioni, impugnatura ergonomica, 3 N.O.+3 N.C., terminali Faston 2.8x0.5



Technical drawings

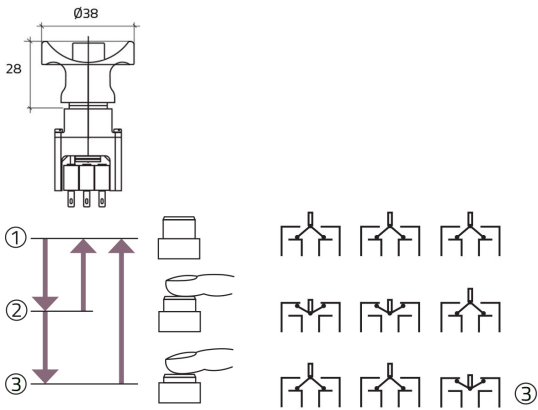

1-2 contatto NC / 3-4 contatto NA
1-2 NC contact / 3-4 NO contact

Contatto NC di controllo posizione ③
NC contact for position control ③