


Data sheet

016P3PG22F

Pulsante di abilitazione con guardia , 3 posizioni,
2NO+2NC terminali Faston 2.8x0.5

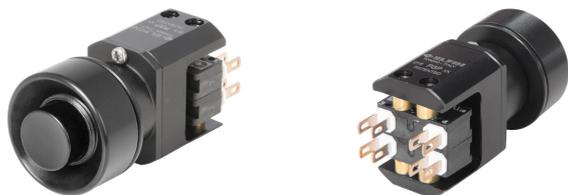

Features

| | |
|-------------------|--|
| Range | 016 Pulsanti di abilitazione ed Accessori |
| Product | Pulsanti di abilitazione a 3 posizioni Ø 16 mm |
| Type | Con guardia, terminali faston |
| Item code | 016P3PG22F |
| Description | Pulsante di abilitazione con guardia , 3 posizioni, 2NO+2NC terminali Faston 2.8x0.5 |
| Colour | Nero |
| Weight - gr | 45,000 |
| Custom tariff no. | 85365080 |
| GTIN | 8052878065355 |

Technical data

| | |
|---------------------------------------|---|
| Approvals | CE, (UL-CSA Microswitch only) |
| Compliance with standards | IEC-EN60947-5-8, IEC-EN60204-1, IEC-EN11161 |
| Operating temperatures | -30° ÷ +70°C |
| Protection degree | IP40 - IP66 with 016GP28+020CGS (IEC-EN60529) |
| Protection against impact | IK06 (IEC-EN62262) |
| Mechanical durability | Position 1-2: 1.000.000 operations |
| Mechanical durability | Position 2-3: 500.000 operations |
| Safety Parameters | B10d:1.000.000 oper. pos.2-3 (UNI-EN-ISO 13849-1) |
| Fixing diameter | 16.5mm - Thickness 1÷6mm |
| Rated insulation voltage | Ui 300V - Uimp 2.5KV (EN-IEC60947-1) |
| Overvoltage category | Class I (IEC-EN61140) |
| Microswitches electrical ratings | Vn 250V max AC-DC, In 5Amax, Ith 10A, Ui 300V |
| Microswitches electrical performances | 20.000 operations with load 250V-5A-cosphi 0.8 |
| Actuating forces | Position 1-2: 10N Position 2-3: 25N |
| Microswitch | 1NO - 1NC change over, snap action |
| Warranty period | 18 months |

Data sheet

016P3PG22F

Pulsante di abilitazione con guardia, 3 posizioni,
2NO+2NC terminali Faston 2.8x0.5

Technical drawings

