


Data sheet

020MT4TL40AR

Manipolatore, 4 posizioni, 4 Temporanee in Linea + 4
N.O., H 55

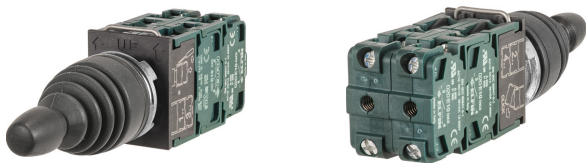

Features

Range	020 Comando e Segnalazione SM2 Ø 22
Product	Manipolatori Ø 22
Type	4 posizioni speciali H 55 mm
Item code	020MT4TL40AR
Description	Manipolatore, 4 posizioni, 4 Temporanee in Linea + 4 N.O., H 55
Colour	Grigio RAL 7016
Weight - gr	92,000
Custom tariff no.	85365080
GTIN	8052878004798

Technical data

Approvals	CE, UL, CSA, EAC
Compliance with standards	IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2
Compliance with standards	UNI CEI EN 45545-2, CEI EN 61373
Operating temperatures	-40° ÷ +70°C
Protection degree	IP67 - IP69K (IEC-EN60529 - DIN40050)
Protection against impact	IK03 (IEC-EN62262)
Mechanical durability	1.000.000 Operations
Shock resistance	30g duration=18ms (EN-IEC 60068-2-27)
Shock resistance	50g duration=11ms (EN-IEC 60068-2-27)
Vibration resistance	5g f= 2...500Hz (EN-IEC 60068-2-6)
Material	PA Polyamide
Cap or bellow material	Silicon rubber
Locking ring material	ZAMAK zinc alloy
Fixing diameter	22.5mm - Thickness 1÷6mm
Tightening torque	2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in)
Contact block	Included
Contact blocks characteristics	See items 020GE20-020E10
Warranty period	18 months

Data sheet

020MT4TL40AR

Manipolatore, 4 posizioni, 4 Temporanee in Linea + 4
N.O., H 55



Technical drawings

