


Data sheet

020PD9

Portalampada BA9S, alimentazione diretta

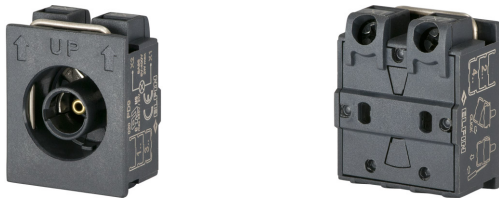

Features

Range	020 Comando e Segnalazione SM2 Ø 22
Product	Portalampada BA9S Ø 22
Type	Portalampada BA9S
Item code	020PD9
Description	Portalampada BA9S, alimentazione diretta
Colour	Grigio RAL 7016
Weight - gr	16,000
Custom tariff no.	85365080
GTIN	8052878005177

Technical data

Approvals	CE, UL, CSA, EAC
Compliance with standards	IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2
Compliance with standards	UNI CEI EN 45545-2, CEI EN 61373
Operating temperatures	-40° ÷ +70° C
Protection degree	IP20 (IEC-EN60529)
Shock resistance	30g duration=18ms (EN-IEC 60068-2-27)
Shock resistance	50g duration=11ms (EN-IEC 60068-2-27)
Vibration resistance	5g f= 2...500Hz (EN-IEC 60068-2-6)
Housing material	PA Polyamide
Screw material	Zinc plated steel
Flange clamping spring material	Stainless steel AISI 304
Terminal screw	Tightening torque 0.8÷1 Nm (IEC-EN60947-1)
Terminal screw head shape	Combined:cross Phillips2 or slotted flat D.5mm max
Terminal screw connections	min 1x0.5mm ² (20AWG) - max 2x2.5mm ² (14AWG)
Bulb type	Ba9S 400V - 2W max (not included)
Full voltage power supply	IEC: 400V AC-DC 2W max UL-CSA: 250V AC-DC 2W max
Rated insulation voltage	Ui 690V - Uimp 4kV (IEC-EN60947-1)
Overvoltage category	Class II (IEC-EN61140)
Warranty period	18 months



Data sheet

020PD9

Portalamпада BA9S, alimentazione diretta

Technical drawings

020



032

