


## Data sheet

### 030M8T44

Manipolatore, 8 posizioni, 8 Temporanee, 4 N.O.+4 N.C.

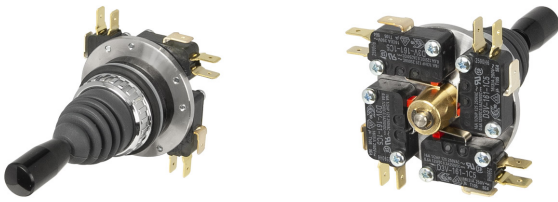

## Features

|                   |                                                        |
|-------------------|--------------------------------------------------------|
| Range             | 030 Comando e Segnalazione EL-SG Ø 30                  |
| Product           | Manipolatori Ø 30                                      |
| Type              | 8 posizioni temporanee                                 |
| Item code         | 030M8T44                                               |
| Description       | Manipolatore, 8 posizioni, 8 Temporanee, 4 N.O.+4 N.C. |
| Colour            | Nero                                                   |
| Weight - gr       | 206,000                                                |
| Custom tariff no. | 85365080                                               |
| GTIN              | 8052878029340                                          |

## Technical data

|                                   |                                                    |
|-----------------------------------|----------------------------------------------------|
| Approvals                         | CE, (UL-CSA Microswitch only)                      |
| Compliance with standards         | IEC-ENC60947-1, IEC-EN60947-5-1                    |
| Operating temperatures            | -25° ÷ +65°C                                       |
| Protection degree                 | IP65 (IEC-EN60529)                                 |
| Mechanical durability             | 10.000.000 Operations                              |
| Cap or bellow material            | Silicon rubber                                     |
| Housing material                  | PA Polyamide                                       |
| External bezel material           | Chromed zinc alloy                                 |
| Internal parts material           | Lever and springs made in stainless steel AISI 304 |
| Internal parts material           | Sliding bushing made in brass                      |
| Microswitches flange material     | Stainless steel AISI 304                           |
| Fixing diameter                   | 30.5mm - Thickness 1÷6mm                           |
| Tightening torque                 | 2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in)                        |
| Rated insulation voltage          | Ui 300V - Uimp 2.5KV (EN-IEC60947-1)               |
| Overvoltage category              | Class I (IEC-EN61140)                              |
| Microswitch contact form          | SPDT (single pole double throw)                    |
| Microswitch terminals             | Quick connect #250                                 |
| Microswitch electrical ratings    | 250VAC - 16A (resistive load)                      |
| Microswitch electrical ratings    | 250VDC - 0.3A / 125VDC - 0.6A (resistive load)     |
| Microswitch electrical durability | 100.000 operations                                 |
| Warranty period                   | 18 months                                          |

## Data sheet

030M8T44

Manipolatore, 8 posizioni, 8 Temporanee, 4 N.O.+4 N.C.

## Technical drawings

