


## Data sheet

### 030PPAF1

Pulsante con guardia estesa, arancio, N.O.+N.C.

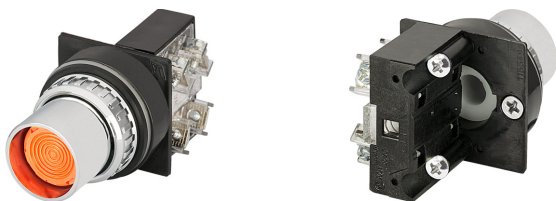

## Features

|                   |                                                 |
|-------------------|-------------------------------------------------|
| Range             | 030 Comando e Segnalazione EL-SG Ø 30           |
| Product           | Pulsanti non luminosi Ø 30                      |
| Type              | Con guardia estesa                              |
| Item code         | 030PPAF1                                        |
| Description       | Pulsante con guardia estesa, arancio, N.O.+N.C. |
| Colour            | Arancio                                         |
| Weight - gr       | 93,000                                          |
| Custom tariff no. | 85365080                                        |
| GTIN              | 8052878032036                                   |

## Technical data

|                                             |                                                   |
|---------------------------------------------|---------------------------------------------------|
| Approvals                                   | CE, UL-CSA (only 030F1-030FA-030FC-030FAA-030FCR) |
| Compliance with standards                   | IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2  |
| Operating temperatures                      | -25° ÷ +65°C                                      |
| Protection degree                           | IP65 (IEC-EN60529)                                |
| Mechanical durability                       | 3.000.000 Operations                              |
| Button/mushroom material (illuminated type) | PC Polycarbonate                                  |
| External bezel material                     | Chromed zinc alloy                                |
| Housing material                            | PA Polyammide + chrome                            |
| Fixing diameter                             | 30.5mm - Thickness 1÷6mm                          |
| Tightening torque                           | 2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in)                       |
| Actuation type                              | Spring return                                     |
| Overvoltage category                        | Class II (IEC-EN61140)                            |
| Contact block                               | Included                                          |
| Contact block characteristics               | See technical features of 030FA - 030FC - 030F1   |
| Warranty period                             | 18 months                                         |

## Data sheet

### 030PPAF1

Pulsante con guardia estesa, arancio, N.O.+N.C.

## Technical drawings

