


Data sheet

030RFFPMRFAFC

Pulsante a fungo Ø 60, momentaneo, rosso, guardia metallica, N.O.+N.C.

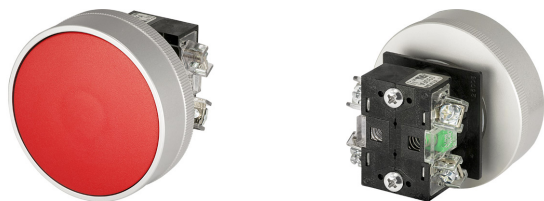

Features

Range	030 Comando e Segnalazione EL-SG Ø 30
Product	Pulsanti a fungo non luminosi Ø 30
Type	Fungo Ø 60, guardia metallo
Item code	030RFFPMRFAFC
Description	Pulsante a fungo Ø 60, momentaneo, rosso, guardia metallica, N.O.+N.C.
Colour	Rosso
Weight - gr	162,000
Custom tariff no.	85365080
GTIN	8052878033255

Technical data

Approvals	CE, UL-CSA (only 030F1-030FA-030FC-030FAA-030FCR)
Compliance with standards	IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2
Operating temperatures	-25° ÷ +65°C
Protection degree	IP65 (IEC-EN60529)
Mechanical durability	3.000.000 Operations
Button/mushroom material (illuminated type)	PC Polycarbonate
External bezel material	Chromed zinc alloy
Housing material	PA Polyammide + chrome
Fixing diameter	30.5mm - Thickness 1÷6mm
Tightening torque	2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in)
Actuation type	Spring return
Overvoltage category	Class II (IEC-EN61140)
Contact block	Included
Contact block characteristics	See technical features of 030FA - 030FC - 030F1
Warranty period	18 months

Data sheet

030RFFPMRFAFC

Pulsante a fungo Ø 60, momentaneo, rosso, guardia
metallica, N.O.+N.C.

Technical drawings

