


Data sheet

030RPLSGFAFC24

Pulsante con guardia completa, luminoso, momentaneo, giallo, led BA9S 24V, N.O.+N.C.

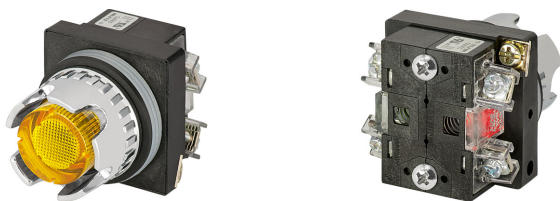

Features

Range	030 Comando e Segnalazione EL-SG Ø 30
Product	Pulsanti luminosi Ø 30
Type	Con guardia completa
Item code	030RPLSGFAFC24
Description	Pulsante con guardia completa, luminoso, momentaneo, giallo, led BA9S 24V, N.O.+N.C.
Colour	Giallo
Weight - gr	100,000
Custom tariff no.	85365080
GTIN	8052878034351

Technical data

Approvals	CE, UL-CSA (only 030F1-030FA-030FC-030FAA-030FCR)
Compliance with standards	IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2
Operating temperatures	-25° ÷ +65°C
Protection degree	IP65 (IEC-EN60529)
Mechanical durability	3.000.000 Operations
Material	PA Polyamide
Button/mushroom material (illuminated type)	PC Polycarbonate
External bezel material	Chromed zinc alloy
Fixing diameter	30.5mm - Thickness 1÷6mm
Tightening torque	2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in)
Bulb type	Ba9S LED 24V AC-DC (included)
Contact block	Included
Contact block characteristics	See technical features of 030FA - 030FC - 030F1
Warranty period	18 months

Data sheet

030RPLSGFAFC24

Pulsante con guardia completa, luminoso, momentaneo, giallo, led BA9S 24V, N.O.+N.C.

Technical drawings

