


## Data sheet

### 030SCO2F1S

Selettore a chiave, 3 posizioni, chiave K95, Cam O, estrazione chiave O-II, ritorno da sx, 2 N.O.+2 N.C.

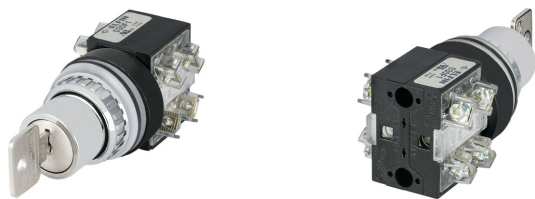

## Features

|                   |                                                                                                          |
|-------------------|----------------------------------------------------------------------------------------------------------|
| Range             | 030 Comando e Segnalazione EL-SG Ø 30                                                                    |
| Product           | Selettori a chiave Ø 30                                                                                  |
| Type              | 3 posizioni                                                                                              |
| Item code         | 030SCO2F1S                                                                                               |
| Description       | Selettore a chiave, 3 posizioni, chiave K95, Cam O, estrazione chiave O-II, ritorno da sx, 2 N.O.+2 N.C. |
| Colour            |                                                                                                          |
| Weight - gr       | 180,000                                                                                                  |
| Custom tariff no. | 85365080                                                                                                 |
| GTIN              | 8052878035969                                                                                            |

## Technical data

|                               |                                                   |
|-------------------------------|---------------------------------------------------|
| Approvals                     | CE, UL-CSA (only 030F1-030FA-030FC-030FAA-030FCR) |
| Compliance with standards     | IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2  |
| Operating temperatures        | -25 ° ÷ +65 °C                                    |
| Protection degree             | IP65 (IEC-EN60529)                                |
| Mechanical durability         | 1.000.000 Operations                              |
| Housing material              | PA Polyamide                                      |
| Knob or lever material        | PC Polycarbonate                                  |
| External bezel material       | Chromed zinc alloy                                |
| Housing material              | PA Polyamide + chrome                             |
| Fixing diameter               | 30.5mm - Thickness 1÷6mm                          |
| Tightening torque             | 2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in)                       |
| Overvoltage category          | Class II (IEC-EN61140)                            |
| Contact block                 | Included                                          |
| Contact block characteristics | See technical features of 030FA - 030FC - 030F1   |
| Warranty period               | 18 months                                         |

Technical drawings

