


Data sheet

030SCT2F1D3

Selettore a chiave, 3 posizioni, chiave K95, Cam T, estrazione chiave 0, ritorno da dx, 2 N.O.+2 N.C.

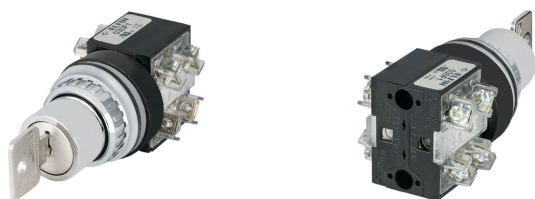

Features

Range	030 Comando e Segnalazione EL-SG Ø 30
Product	Selettori a chiave Ø 30
Type	3 posizioni
Item code	030SCT2F1D3
Description	Selettore a chiave, 3 posizioni, chiave K95, Cam T, estrazione chiave 0, ritorno da dx, 2 N.O.+2 N.C.
Colour	
Weight - gr	180,000
Custom tariff no.	85365080
GTIN	8052878036133

Technical data

Approvals	CE, UL-CSA (only 030F1-030FA-030FC-030FAA-030FCR)
Compliance with standards	IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2
Operating temperatures	-25 ° ÷ +65 °C
Protection degree	IP65 (IEC-EN60529)
Mechanical durability	1.000.000 Operations
Housing material	PA Polyamide
Knob or lever material	PC Polycarbonate
External bezel material	Chromed zinc alloy
Housing material	PA Polyamide + chrome
Fixing diameter	30.5mm - Thickness 1÷6mm
Tightening torque	2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in)
Overvoltage category	Class II (IEC-EN61140)
Contact block	Included
Contact block characteristics	See technical features of 030FA - 030FC - 030F1
Warranty period	18 months



Data sheet

030SCT2F1D3


Selettore a chiave, 3 posizioni, chiave K95, Cam T,
estrazione chiave 0, ritorno da dx, 2 N.O.+2 N.C.



Technical drawings



CAM T



33 — 34

11 — 12



43 — 44

21 — 22

