


Data sheet

030SLNBF1D

Selettore a leva, nero, 2 posizioni, Cam B, ritorno a molla da dx, N.O.+N.C.

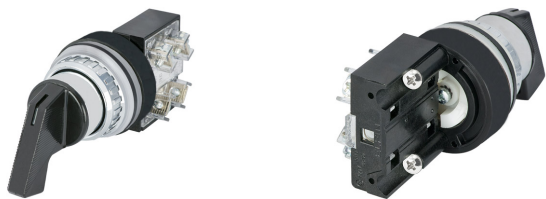

Features

Range	030 Comando e Segnalazione EL-SG Ø 30
Product	Selettori a leva Ø 30
Type	2 posizioni
Item code	030SLNBF1D
Description	Selettore a leva, nero, 2 posizioni, Cam B, ritorno a molla da dx, N.O.+N.C.
Colour	Nero
Weight - gr	100,000
Custom tariff no.	85365080
GTIN	8052878037710

Technical data

Approvals	CE, UL-CSA (only 030F1-030FA-030FC-030FAA-030FCR)
Compliance with standards	IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2
Operating temperatures	-25° ÷ +65°C
Protection degree	IP65 (IEC-EN60529)
Mechanical durability	1.000.000 Operations
Housing material	PA Polyamide
Knob or lever material	PC Polycarbonate
External bezel material	Chromed zinc alloy
Housing material	PA Polyamide + chrome
Fixing diameter	30.5mm - Thickness 1÷6mm
Tightening torque	2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in)
Overvoltage category	Class II (IEC-EN61140)
Contact block	Included
Contact block characteristics	See technical features of 030FA - 030FC - 030F1
Warranty period	18 months

030SLNBF1D



Technical drawing of a 1/2" NPT female plug. The drawing shows the side profile and a cross-section. Dimensions are given in millimeters: overall height 46, outer diameter $\varnothing 36$, thread length 52.5, shoulder width 20, and plug diameter 35. The cross-section shows a 1:5 taper and four internal threads. The drawing is labeled with '1/2' and 'NPT'.

