


Data sheet

030SMLBRFAFC24

Selettore luminoso a manopola, rosso, 2 posizioni, Cam B
led BA9S, N.O.+N.C.

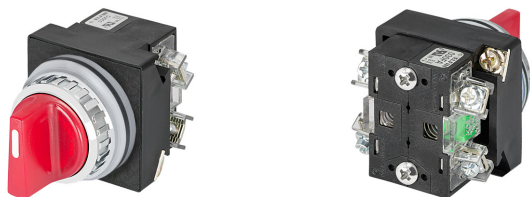

Features

Range	030 Comando e Segnalazione EL-SG Ø 30
Product	Selettori a manopola luminosi Ø 30
Type	2 posizioni
Item code	030SMLBRFAFC24
Description	Selettore luminoso a manopola, rosso, 2 posizioni, Cam B led BA9S, N.O.+N.C.
Colour	Rosso
Weight - gr	94,000
Custom tariff no.	85365080
GTIN	8052878038267

Technical data



Approvals	CE, UL-CSA (only 030F1-030FA-030FC-030FAA-030FCR)
Compliance with standards	IEC-EN60947-1, IEC-EN60947-5-1, UL508, CSA C22-2
Operating temperatures	-25° ÷ +65°C
Protection degree	IP65 (IEC-EN60529)
Mechanical durability	1.000.000 Operations
Housing material	PA Polyamide
Knob or lever material	PC Polycarbonate
External bezel material	Chromed zinc alloy
Fixing diameter	30.5mm - Thickness 1÷6mm
Tightening torque	2 ÷ 3Nm (17.7 ÷ 26.6 Lb-in)
Bulb type	Ba9S LED 24V AC-DC (included)
Contact block	Included
Contact block characteristics	See technical features of 030FA - 030FC - 030F1

Data sheet

030SMLBRFAFC24

Selettore luminoso a manopola, rosso, 2 posizioni, Cam B
led BA9S, N.O.+N.C.

Technical drawings



CAM B

