



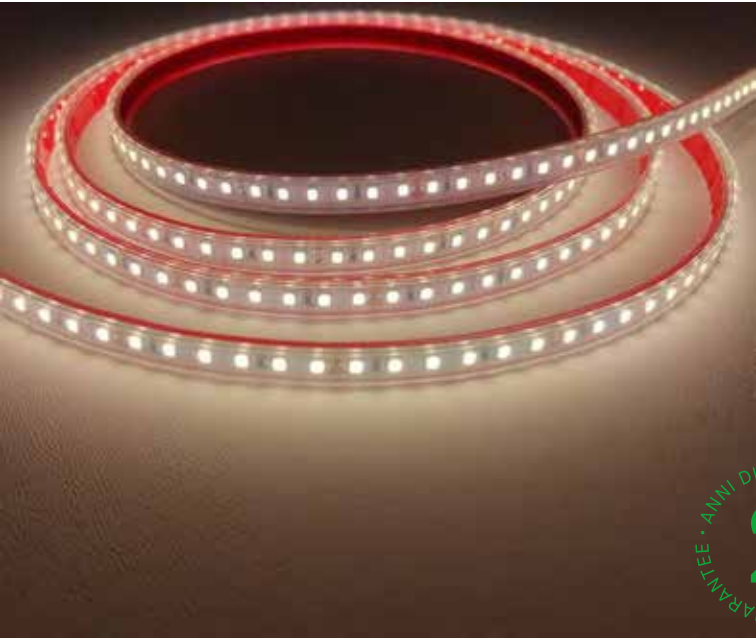

50051

Code	Nominal lm/m	Real lm/m	W/1m	CCT	LED/m
50051/2700K	1450	1260	10	2700K	120
50051/C	1600	1390	10	3000K	120
50051/N	1750	1520	10	4000K	120
50051/F	1800	1564	10	6000K	120

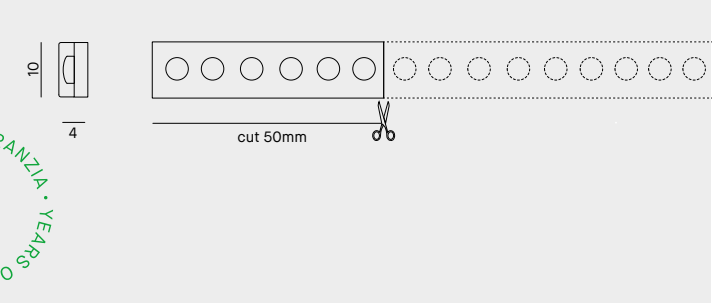

CRI >80	120°	Vdc 24	DRIVER NOT INCLUDED	P parallel	IP65	CE	F	III	A++	A+	A
---------	------	--------	---------------------	------------	------	----	---	-----	-----	----	---

Striscia LED da esterno di 5 metri.	LED strip for outdoor use of 5m.	Bandeau LED pour l'extérieur de 5 mètres.	LED Lichtband für aussen von 5 Meter.
LED 2835, montato su nastro flessibile con guaina protettiva in silicone.	2835 LED, coated with a silicone sheath.	LED 2835, réalisé sur circuit flexible revêtu d'une couche de silicone.	LED 2835, Hergestellt auf einem flexiblen Schaltkreis, der mit einer Silikonschicht bedeckt ist.
Life time 30.000h (rendimento 70%).	Life time 30.000h (70%lumen maintenance).	Durée de vie 30.000h (rendement 70%).	Lebensdauer 30.000h (Lichtstrom 70%).
È possibile tagliare o piegare il nastro ogni 50mm (6 LED). Lunghezza massima consentita del nastro è 5 metri.	Possible flexible and cut points every 50mm (6 LEDs). Maximum length allowed for the tape is 5m.	Le bandeau peut être coupé ou plié tous les 50mm (6 LEDs). Longueur maximum pour le circuit flexible 5 mètres.	Alle 50mm (6 LED) schneid- oder biegbar. Maximal zulässige Länge des Bandes beträgt 5 Meter.
Nella confezione sono inclusi il kit di fissaggio e il kit per ripristinare il grado di protezione IP65.	Fixing kit and IP65 kit included.	Inclus kit de fixation et kit pour rétablir la protection IP65.	Befestigungs-Kit und wiederherstellbarer Schutz-Kit sind enthalten.
Profili in alluminio da ordinare separatamente.	Aluminium profiles to be ordered separately.	Profils en aluminium à commander séparément.	Aluminiumprofile separat zu bestellt.
Il collegamento di più strisce LED ad un solo alimentatore va effettuato in parallelo.	In case more LED strips have to be connected to one power supply, connect them in parallel.	Il est possible de brancher en parallèle plusieurs bandeaux sur la même alimentation.	Mehrere LED-Lichtbänder sollten parallelgeschaltet werden.

Alimentatori da ordinare separatamente - Power supplies to be ordered separately - Unités d'alimentation à commander séparément - Netzgerät separat zu bestellen

Code	IP20	W	max	m	Code	IP20	W	max	m	Code	IP67	W	max	m	Code	IP67	W	max	m
5855		20	2.0		5801 (PUSH/DIM1-10V)		100	10.0		5788		25	2.5		5784		100	10.0	
5674		70	7.0		5802/T (PUSH/DALI)		100	10.0		5789		40	4.0		5672		150	15.0	
5678		75	7.5							5782		60	6.0		5676		150	15.0	
5677		120	12.0							5673		70	7.0		5785		240	24.0	
5675		150	15.0							5783		75	7.5		5786		320	32.0	

calcolo eseguito con tolleranza assorbimento +20% - calculation with an electrical absorption tolerance of +20%

Kit emergenza disponibile su richiesta - Emergency kit available upon request - Kit éclairage secouru disponible sur demande - Notfall Kit auf Anfrage erhältlich.

Code	Descrizione	Description	Description	Beschreibung
KIT EM/LED/1H	Kit emergenza per LED 1 ora - Batt.7.2V - 1.5Ah	Emergency kit for LED 1 hour - Batt.7.2V - 1.5Ah	Kit éclairage secouru pour LED 1 heure - Batt.7.2V - 1.5Ah	Notfall Kit für LED 1 Stunde - Batt.7.2V - 1.5Ah
KIT EM/LED/3H	Kit emergenza per LED 3 ore - Batt.7.2V - 4Ah	Emergency kit for LED 3 hours - Batt.7.2V - 4Ah	Kit éclairage secouru pour LED 3 heures - Batt.7.2V - 4Ah	Notfall Kit für LED 3 Stunden - Batt.7.2V - 4Ah

Unità di gestione da ordinare separatamente – Control units to be ordered separately - Unités de gestion à commander séparément – Steuergeräte separat zu bestellen

Code	Descrizione	Description
5856	Dimmer PWM PUSH/DIM 0/1-10V	Dimmer PWM PUSH/DIM/1-10V
5834/B	Centralina Bluetooth RGB-RGBW-Tunable White-Dimming	RGB-RGBW-Tunable White-Dimming Bluetooth control unit
186155/DIMMER	Dimmer 1-10V monocolor	Dimmer 1-10V mono-color
5854	Dimmer DALI monocolor	DALI mono-color dimmer
5950/TW	Centralina di controllo Tunable White e Dimming	Tunable White and Dimming control unit
5951/C	Telecomando a 4 zone per centralina 5950/TW	Remote controller 4 zones for 5950/TW control unit
5952/T	Pannello Touch da parete a 4 zone per centralina 5950/TW	Wall touch panel 4 zones for 5950/TW control unit

Profili in alluminio compatibili - Suitable aluminium profiles available

2m da superficie, parete e plafone - wall and ceiling surface-mounted of 2m

Trasparente/Transparent	Opale/Opal	Acidato/Acid-etched
BARRA/STRIP/7	Lens	Lens
BARRA/STRIP/10	BARRA/STRIP/10/S	BARRA/STRIP/10/A
PA/04	PA/04/S	--
PA/06	PA/06/S	--

2m da incasso - recessed-mounted of 2m

Trasparente/Transparent	Opale/Opal	Acidato/Acid-etched
BARRA/STRIP/9	BARRA/STRIP/9/S	BARRA/STRIP/9/A
BARRA/STRIP/15	BARRA/STRIP/15/S	BARRA/STRIP/15/A
BARRA/STRIP/16	BARRA/STRIP/16/S	BARRA/STRIP/16/A
BARRA/STRIP/17	BARRA/STRIP/17/S	BARRA/STRIP/17/A
PA/07	PA/07/S	--

2m angolare - angled of 2m

Trasparente/Transparent	Opale/Opal	Acidato/Acid-etched
BARRA/STRIP/11	BARRA/STRIP/11/S	BARRA/STRIP/11/A
BARRA/STRIP/12	BARRA/STRIP/12/S	BARRA/STRIP/12/A