





50091

Code	Nominal lm/m	Real lm/m	W/m	CCT	LED/m
50091/2700K	2000	1850	15	2700K	120
50091/C	2200	2035	15	3000K	120
50091/N	2600	2405	15	4000K	120
50091/F	2650	2451	15	6000K	120

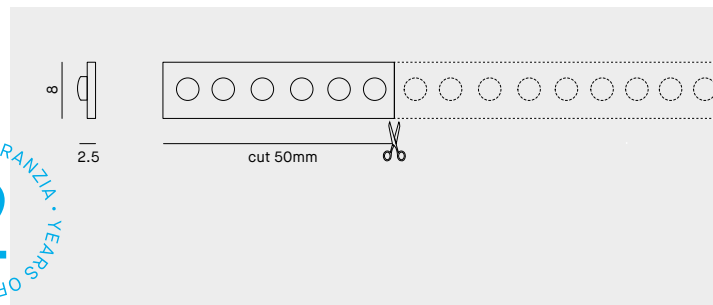

CRI >80	120°	Vdc 24	DRIVER NOT INCLUDED	P parallel	IP20	CE	F	III	A++	A+	A
---------	------	--------	---------------------	------------	------	----	---	-----	-----	----	---

Striscia LED da interno di 5 metri.	LED strip for indoor use of 5m.	Bandeau LED pour l'intérieur de 5 mètres.	LED Lichtband für innen von 5 Meter.
LED 2835, montato su nastro flessibile autoadesivo 3M.	2835 LED, assembled on flexible 3M sticky tape.	LED 2835, réalisé sur circuit flexible autocollant.	LED 2835, im Stromkreis realisiert flexibler Aufkleber
Life time 30.000h (rendimento 70%).	Life time 30.000h (70% lumen maintenance).	Durée de vie 30.000h (rendement 70%).	Lebensdauer 30.000h (Lichtstrom 70%).
È possibile tagliare o piegare il nastro ogni 50mm (6 LED). Lunghezza massima consentita del nastro è 5 metri.	Possible flexible and cut points every 50mm (6 LEDs). Maximum length allowed for the tape is 5m.	Le bandeau peut être coupé ou plié tous les 50mm (6 LEDs). Longueur maximum pour le circuit flexible 5 mètres.	Alle 50mm (6 LED) schneid- oder biegsam. Maximal zulässige Länge des Bandes beträgt 5 Meter.
Profili in alluminio da ordinare separatamente, (idonei per una adeguata dissipazione del calore).	Aluminium profiles to be ordered separately, (suggested for a suitable heat dissipation).	Profils en aluminium à commander séparément (pour une correcte dissipation de la chaleur).	Aluminiumprofile separat zu bestellt (wichtig für eine ausreichende Wärmeableitung).
Il collegamento di più strisce LED ad un solo alimentatore va effettuato in parallelo.	In case more LED strips have to be connected to one power supply, connect them in parallel.	Il est possible de brancher en parallèle plusieurs bandeaux sur la même alimentation.	Mehrere LED-Lichtbänder sollten parallelgeschaltet werden.

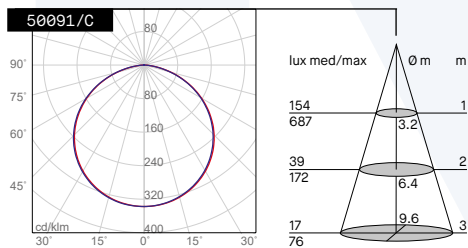

Alimentatori da ordinare separatamente - Power supplies to be ordered separately - Unités d'alimentation à commander séparément - Netzgerät separat zu bestellen

Code	IP20	W	max m	Code	IP20	W	max m	Code	IP67	W	max m	Code	IP67	W	max m
5855		20	1.0	5801 (PUSH/DIM1-10V)		100	5.5	5788		25	1.5	5784		100	5.5
5674		70	3.5	5802/T (PUSH/DALI)		100	5.5	5789		40	2.0	5672		150	8.0
5678		75	4.0					5782		60	3.0	5676		150	8.0
5677		120	6.5					5673		70	3.5	5785		240	13.0
5675		150	8.0					5783		75	4.0	5786		320	17.5

calcolo eseguito con tolleranza assorbimento +20% - calculation with an electrical absorption tolerance of +20%

Kit emergenza disponibile su richiesta - Emergency kit available upon request - Kit éclairage secours disponible sur demande - Notfall Kit auf Anfrage erhältlich.

Code	Descrizione	Description	Description	Beschreibung
KIT EM/LED/1H	Kit emergenza per LED 1 ora - Batt.7.2V - 1.5Ah	Emergency kit for LED 1 hour - Batt.7.2V - 1.5Ah	Kit éclairage secours pour LED 1 heure - Batt.7.2V - 1.5Ah	Notfall Kit für LED 1 Stunde - Batt.7.2V - 1.5Ah
KIT EM/LED/3H	Kit emergenza per LED 3 ore - Batt.7.2V - 4Ah	Emergency kit for LED 3 hours - Batt.7.2V - 4Ah	Kit éclairage secours pour LED 3 heures - Batt.7.2V - 4Ah	Notfall Kit für LED 3 Stunden - Batt.7.2V - 4Ah

Unità di gestione da ordinare separatamente – *Control units to be ordered separately* - Unités de gestion à commander séparément – Steuergeräte separat zu bestellen

Code	Descrizione	Description
5856	Dimmer PWM PUSH/DIM 0/1-10V	Dimmer PWM PUSH/DIM/1-10V
5834/B	Centralina Bluetooth RGB-RGBW-Tunable White-Dimming	RGB-RGBW-Tunable White-Dimming Bluetooth control unit
186155/DIMMER	Dimmer 1-10V monocolor	Dimmer 1-10V mono-color
5854	Dimmer DALI monocolor	DALI mono-color dimmer
5950/TW	Centralina di controllo Tunable White e Dimming	Tunable White and Dimming control unit
5951/C	Telecomando a 4 zone per centralina 5950/TW	Remote controller 4 zones for 5950/TW control unit
5952/T	Pannello Touch da parete a 4 zone per centralina 5950/TW	Wall touch panel 4 zones for 5950/TW control unit

Profili in alluminio compatibili - *Suitable aluminium profiles available*

2m da superficie, parete e plafone - *wall and ceiling surface-mounted of 2m*

Code		
Trasparente/Transparent	Opale/Opal	Acidato/Acid-etched
BARRA/STRIP/3	BARRA/STRIP/3/S	BARRA/STRIP/3/A
BARRA/STRIP/3E	BARRA/STRIP/3E/S	BARRA/STRIP/3E/A
BARRA/STRIP/7	Lens	Lens
BARRA/STRIP/10	BARRA/STRIP/10/S	BARRA/STRIP/10/A
BARRA/STRIP/14	Lens	Lens
BARRA/STRIP/19	BARRA/STRIP/19/S	BARRA/STRIP/19/A

2m da incasso - *recessed-mounted of 2m*

Code		
Trasparente/Transparent	Opale/Opal	Acidato/Acid-etched
BARRA/STRIP/4	BARRA/STRIP/4/S	BARRA/STRIP/4/A
BARRA/STRIP/5	BARRA/STRIP/5/S	BARRA/STRIP/5/A
BARRA/STRIP/9	BARRA/STRIP/9/S	BARRA/STRIP/9/A
BARRA/STRIP/15	BARRA/STRIP/15/S	--

2m angolare - *angled of 2m*

Code		
Trasparente/Transparent	Opale/Opal	Acidato/Acid-etched
BARRA/STRIP/6	BARRA/STRIP/6/S	BARRA/STRIP/6/A
BARRA/STRIP/8	BARRA/STRIP/8/S	BARRA/STRIP/8/A
BARRA/STRIP/11	BARRA/STRIP/11/S	BARRA/STRIP/11/A

Code		
Trasparente/Transparent	Opale/Opal	Acidato/Acid-etched
PA/01	PA/01/S	--
--	PA/02/S	--
PA/03	PA/03/S	--
PA/04	PA/04/S	--
PA/06	PA/06/S	--

Code		
Trasparente/Transparent	Opale/Opal	Acidato/Acid-etched
BARRA/STRIP/16	BARRA/STRIP/16/S	BARRA/STRIP/16/A
BARRA/STRIP/17	BARRA/STRIP/17/S	BARRA/STRIP/17/A
PA/05	PA/05/S	--
PA/07	PA/07/S	--

Code		
Trasparente/Transparent	Opale/Opal	Acidato/Acid-etched
BARRA/STRIP/12	BARRA/STRIP/12/S	BARRA/STRIP/12/A
BARRA/STRIP/22	BARRA/STRIP/22/S	BARRA/STRIP/22/A

Profili in alluminio idonei per un'adeguata dissipazione, da ordinare separatamente / *Aluminium profiles suggested for a suitable heat dissipation, to be ordered separately.*