




2 ANNI DI GARANZIA • YEARS OF GUARANTEE

60082

Code	Lamp holder	W/max	Beam
60082	GU10	8	35°

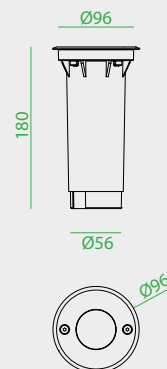

Incasso calpestabile tondo per installazione a pavimento.

Round walk over recessed fitting for in-ground installation.

Encastré de sol LED passage piéton rond.

Begehrbarer Boden-Einbau rund.

Porta lampada GU10 integrato. Lampada LED GU10 non inclusa.

GU10 lamp holder included, LED lamp not included.

Douille GU10 incluse. Lampe LED GU10 pas incluse.

Lampenfassung GU10 integriert. Lampe GU10 nicht enthalten.

Anello in acciaio AISI 316.
Corpo in pressofusione alluminio anodizzato nero.
Controcassa in policarbonato inclusa.

AISI 316 stainless steel ring.
Body in black anodised aluminium.
Housing in polycarbonate is included.

Anneau extérieur en acier AISI 316L.
Corps en aluminium anodisé noir. Boîtier d'encastrement en polycarbonate inclus.

Ring aus Edelstahl AISI 316.
Gehäuse aus Aluminium Druckguss schwarz eloxiert.
Gehäuse in Polycarbonat enthalten.

Vetro trasparente temperato spessore 12mm.

12mm toughened transparent glass.

Diffuseur en verre trempé transparent 12mm.

Gehärtetes transparentes Glas 12mm.

Cavo in neoprene H05RN-F 3x1mm² di 3 m.

Neoprene H05RN-F 3x1mm² cable of 3m.

Câble en néoprène H05RN-F 3x1mm² de 3 m.


Neopren-Kabel H05RN-F 3x1mm² von 3m.

Alimentazione 220-240V.

220-240V power supply.


Alimentation 220-240V

Stromversorgung 220-240V

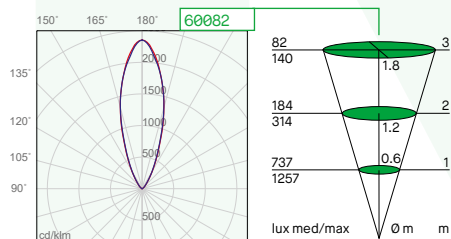

Ø84

C/CASSA X 60082



La controcassa in policarbonato è inclusa nella confezione ma può essere anche ordinata separatamente.

The polycarbonate housing is included, but can be ordered separately if needed.

Boîtier d'encastrement en polycarbonate inclus dans l'emballage, mais il y a la possibilité de la commander séparément.

Einbaugehäuse aus Polykarbonat ist enthalten, kann aber auch separat bestellt werden.



Doppio ingresso per cablaggio in successione.

Loop in - loop out connection system.

Système branchement loop in - loop out.

Doppelter Eingang loop in - loop out.