

Striscia LED da esterno di 5 metri.

LED strip for outdoor use of 5m.

Bandeau LED pour l'extérieur de 5 mètres.

LED Lichtband für aussen von 5 Meter.

LED 2835, montato su nastro flessibile 3M con guaina protettiva in silicone.

2835 LED, coated with a silicone sheath. Assembled on flexible 3M sticky tape.

LED 2835, réalisé sur circuit flexible 3M revêtu d'une couche de silicone.

LED 2835, auf einem flexiblen 3M Band montiert mit Schutzhülle aus Silikon.

Life time 30.000h (rendimento 70%).

Life time 30.000h (70%lumen maintenance).

Durée de vie 30.000h (rendement 70%).

Lebensdauer 30.000h (Lichtstrom 70%).

È possibile tagliare o piegare il nastro ogni 50mm (6 LED). Lunghezza massima consentita del nastro è 10 metri.

Possible flexible and cut points every 50mm (6 LEDs). Maximum length allowed for the tape is 10m.

Le bandeau peut être coupé ou plié tous les 50mm (6 LEDs). Longueur maximum pour le circuit flexible 10 mètres.

Alle 50mm (6 LED) schneid- oder biegsam. Maximal zulässige Länge des Bandes beträgt 10 Meter.

Nella confezione sono inclusi il kit di fissaggio e il kit per ripristinare il grado di protezione IP67.

Fixing kit and IP67 kit included.

Inclus kit de fixation et kit pour rétablir la protection IP67.

Befestigungs-Kit und wiederherstellbarer Schutz-Kit sind enthalten.

Profili in alluminio da ordinare separatamente.

Aluminium profiles to be ordered separately.

Profils en aluminium à commander séparément.

Aluminiumprofile separat zu bestellt.

Il collegamento di più strisce LED ad un solo alimentatore va effettuato in parallelo.


In case more LED strips have to be connected to one power supply, connect them in parallel.

Il est possible de brancher en parallèle plusieurs bandeaux sur la même alimentation.

Mehrere LED-Lichtbänder sollten parallelgeschaltet werden.

70012

Code	Nominal lm/m	Real lm/m	W/m	CCT	LED/m
70012/2700K	632	534	4.8	2700K	120
70012/C	665	562	4.8	3000K	120
70012/N	745	629	4.8	4000K	120
70012/F	745	629	4.8	6000K	120

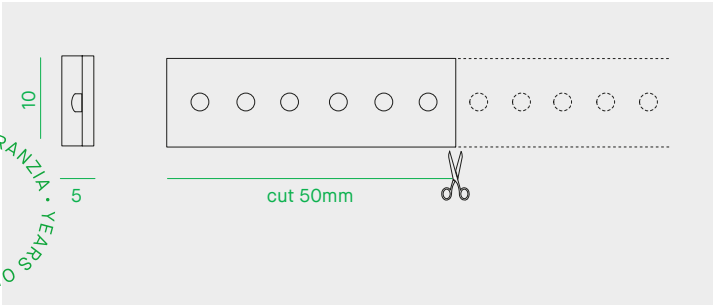

Alimentatori da ordinare separatamente — Power supplies to be ordered separately - Unités d'alimentation à commander séparément — Netzgerät separat zu bestellen

Code	IP20	W	max	m	Code	IP20	W	max	m	Code	IP67	W	max	m	Code	IP67	W	max	m
5855		20	3.5		5801 (PUSH/DIM1-10V)		100	17.5		5788		25	4.0		5784		100	17.5	
5674		70	12.0		5802/T (PUSH/DALI)		100	17.5		5789		40	7.0		5672		150	26.0	
5678		75	13.0							5782		60	10.5		5676		150	26.0	
5677		120	20.5							5673		70	12.0		5785		240	41.5	
5675		150	26.0							5783		75	13.0		5786		320	55.5	

calcolo eseguito con tolleranza assorbimento +20% - calculation with an electrical absorption tolerance of +20%

Unità di gestione da ordinare separatamente — *Control units to be ordered separately* - Unités de gestion à commander séparément — *Steuergeräte separat zu bestellen*

Code	Descrizione	Description
5862	Dimmer PUSH/DIM 0/1-10V	Dimmer PUSH/DIM/1-10V
5856	Dimmer PWM PUSH/DIM 0/1-10V	Dimmer PWM PUSH/DIM/1-10V
5834/B	Centralina Bluetooth RGB-RGBW-Tunable White-Dimming	RGB-RGBW-Tunable White-Dimming Bluetooth control unit
186155/DIMMER	Dimmer 1-10V monocolor	Dimmer 1-10V mono-colour
5854	Dimmer DALI monocolor	DALI mono-colour dimmer
5950/TW	Centralina di controllo Tunable White e Dimming	Tunable White and Dimming control unit
5951/C	Telecomando a 4 zone per centralina 5950/TW	Remote controller 4 zones for 5950/TW control unit
5952/T	Pannello Touch da parete a 4 zone per centralina 5950/TW	Wall touch panel 4 zones for 5950/TW control unit
5960/U	Centralina Wi-Fi RGB-RGBW-Tunable White-Dimming	RGB-RGBW-Tunable White-Dimming Wi-Fi control unit
5961/G	Gateway Wi-Fi per centralina 5940/U e 5950/TW	Gateway Wi-Fi for 5940/U and 5950/TW control unit
5811	Controller DMX a 3 canali	3 channels DMX controller
5812	Amplificatore di segnale a 3 canali	3 channels signal amplifier
5921/S	Amplificatore di segnale a 5 canali	5 channels signal amplifier

Gestione della luce / *Light management*, see [cat.42](#)

Profili in alluminio compatibili - *Suitable aluminium profiles available* - Profils en aluminium appropriés disponibles - *Geeignete Aluminiumprofile erhältlich*

Code		Code		Code	
BARRA/STRIP/3	✓	BARRA/STRIP/12	✓	PA/01	✓
BARRA/STRIP/3E	✓	BARRA/STRIP/16	✓	PA/02/S	✓
BARRA/STRIP/4	✓	BARRA/STRIP/17	✓	PA/03	✓
BARRA/STRIP/5	✓	BARRA/STRIP/18	✗	PA/04	✓
BARRA/STRIP/6	✓	BARRA/STRIP/19	✓	PA/05	✓
BARRA/STRIP/8	✗	BARRA/STRIP/22	✗	PA/06	✓
BARRA/STRIP/9	✓	BARRA/STRIP/23	✗	PA/07	✓
BARRA/STRIP/10	✓	BARRA/STRIP/24	✓	PA/08	✗
BARRA/STRIP/11	✓				

Kit emergenza disponibile su richiesta — *Emergency kit available upon request* - Kit éclairage secouru disponible sur demande - *Notfall Kit auf Anfrage erhältlich*.

Code	Descrizione	Description	Description	Beschreibung
KIT EM/LED/1H	Kit emergenza per LED 1 ora - Batt.7.2V - 1.5Ah	Emergency kit for LED 1 hour - Batt.7.2V - 1.5Ah	Kit éclairage secouru pour LED 1 heure - Batt.7.2V - 1.5Ah	Notfall Kit für LED 1 Stunde - Batt.7.2V - 1.5Ah
KIT EM/LED/3H	Kit emergenza per LED 3 ore - Batt.7.2V - 4Ah	Emergency kit for LED 3 hours - Batt.7.2V - 4Ah	Kit éclairage secouru pour LED 3 heures - Batt.7.2V - 4Ah	Notfall Kit für LED 3 Stunden - Batt.7.2V - 4Ah