


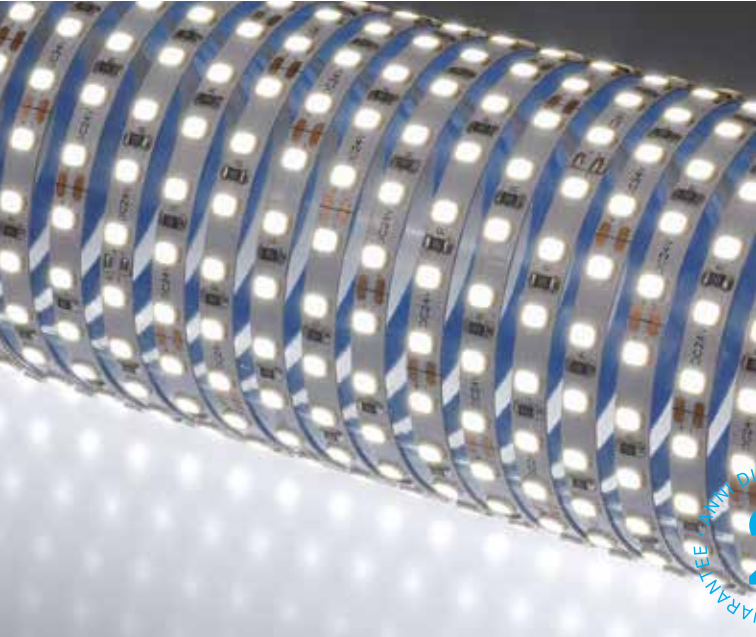

CRI >80	120°	Vdc 24	DRIVER NOT INCLUDED	P parallel	IP20	CE	F	III	A++	A+	A
------------	------	-----------	------------------------	---------------	------	----	---	-----	-----	----	---

Striscia LED da interno di 5 metri.

LED strip for indoor use of 5m.

Bandeau LED pour l'intérieur de 5 mètres.

LED Lichtband für innen von 5 Meter.

LED 2835, montato su nastro flessibile autoadesivo.

2835 LED, assembled on flexible sticky tape.

LED 2835, réalisé sur circuit flexible autocollant.

LED 2835, auf einem flexiblen Klebeband.

Life time 50.000h (rendimento 70%).

Life time 50.000h (70%lumen maintenance).

Durée de vie 50.000h (rendement 70%).

Lebensdauer 50.000h (Lichtstrom 70%).

È possibile tagliare o piegare il nastro ogni 50mm (6 LED).
Lunghezza massima consentita del nastro è 5 metri.

Possible flexible and cut points every 50mm (6 LEDs).
Maximum length allowed for the tape is 5m.

Le bandeau peut être coupé ou plié tous les 50mm (6 LEDs).
Longueur maximum pour le circuit flexible 5 mètres.

Alle 50mm (6 LED) schneid- oder biegbar.
Maximal zulässige Länge des Bandes beträgt 5 Meter.

Profilo in alluminio cod. BARRA/STRIP/18 da ordinare separatamente, (indispensabili per una adeguata dissipazione del calore).

Code BARRA/STRIP/18 aluminium profile to be ordered separately, (essential for a correct heat dissipation).

Profil en aluminium cod. BARRA/STRIP/18 à commander séparément (indispensable pour une dissipation correcte de la chaleur).


Aluminiumprofile cod. BARRAT/STRIP/18 separat zu bestellt (wichtig für eine ausreichende Wärmeableitung).

Il collegamento di più strisce LED ad un solo alimentatore va effettuato in parallelo.


In case more LED strips have to be connected to one power supply, connect them in parallel.

Il est possible de brancher en parallèle plusieurs bandeaux sur la même alimentation

Mehrere LED-Lichtbänder sollten parallelgeschaltet werden

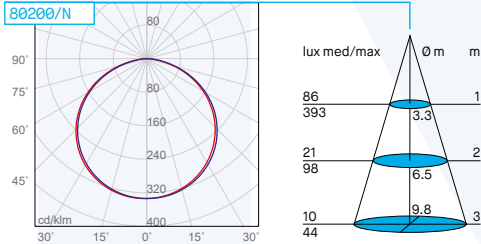

BARRA/STRIP/18

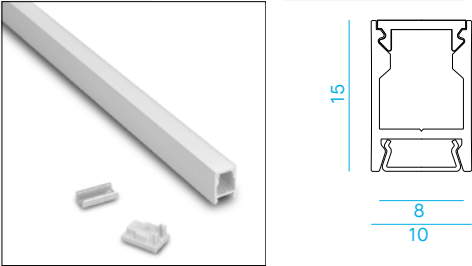

Alimentatori da ordinare separatamente - Power supplies to be ordered separately - Unités d'alimentation à commander séparément - Netzgerät separat zu bestellen

Code IP20	W	max m	Code IP20	W	max m	Code IP67	W	max m	Code IP67	W	max m
5855	20	2.5	5801 (PUSH/DIM1-10V)	100	12.0	5788	25	3.0	5784	100	12.0
5674	70	8.0	5802/T (PUSH/DALI)	100	12.0	5789	40	4.5	5672	150	18.0
5678	75	9.0				5782	60	7.0	5676	150	18.0
5677	120	14.0				5673	70	8.0	5785	240	28.5
5675	150	18.0				5783	75	9.0	5786	320	38.0

calcolo eseguito con tolleranza assorbimento +20% - calculation with an electrical absorption tolerance of +20%

Kit emergenza disponibile su richiesta - Emergency kit available upon request - Kit éclairage secours disponible sur demande - Notfall Kit auf Anfrage erhältlich.

Code	Descrizione	Description	Description	Beschreibung
KIT EM/LED/1H	Kit emergenza per LED 1 ora - Batt.7.2V - 1.5Ah	Emergency kit for LED 1 hour - Batt.7.2V - 1.5Ah	Kit éclairage secours pour LED 1 heure - Batt.7.2V - 1.5Ah	Notfall Kit für LED 1 Stunde - Batt.7.2V - 1.5Ah
KIT EM/LED/3H	Kit emergenza per LED 3 ore - Batt.7.2V - 4Ah	Emergency kit for LED 3 hours - Batt.7.2V - 4Ah	Kit éclairage secours pour LED 3 heures - Batt.7.2V - 4Ah	Notfall Kit für LED 3 Stunden - Batt.7.2V - 4Ah