


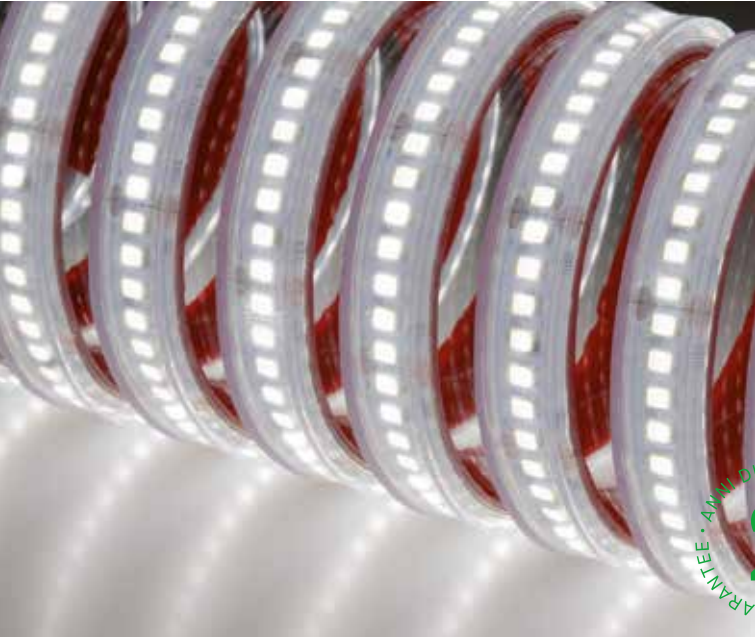

CRI >90	120°	Vdc 24	DRIVER NOT INCLUDED	P parallel	IP67	CE	F	III	A++	A+	A
------------	------	-----------	------------------------	---------------	------	----	---	-----	-----	----	---

Striscia LED da esterno di 5 metri.

LED 2835, montato su nastro flessibile con guaina protettiva in silicone e nastro autoadesivo 3M.
238 LED/m - 1190 LED/5m

Life time 50.000h

È possibile tagliare o piegare il nastro ogni 29.4mm
Lunghezza massima consentita del nastro è 5 metri.

Il collegamento di più strisce LED ad un solo alimentatore va effettuato in parallelo.

Per il ripristino del grado IP seguire le istruzioni all'interno della confezione o scaricabili dal sito.

LED strip for outdoor use of 5m.

2835 LED, sealed with silicone and supplied with 3M adhesive tape on the back.
238 LED/m - 1190 LEDs/5m

Life time 50.000h


Possible flexible and cut points every 29.4mm
Maximum length allowed for the tape is 5m.

In case more LED strips have to be connected to one power supply, connect them in parallel.

To restore the IP level, please follow the instructions accompanying the product or downloadable on our website.

80310

Code	Nominal lm/m	Real lm/m	W/1m	CCT	CRI	cut mm
80310/90/2700K	2850	1960	14	2700K	>90	29.4
80310/90/C	2850	1960	14	3000K	>90	29.4
80310/90/N	3140	2159	14	4000K	>90	29.4

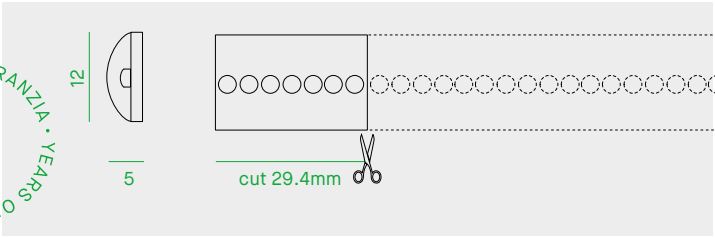

Bandeau LED pour l'extérieur de 5 mètres.

LED 2835, réalisé sur circuit flexible scellé avec silicone et fourni avec 3M adhesif autocollant sur le derrier.
238 LED/m - 1190 LED/5m

Durée de vie 50.000h

Le bandeau peut être coupé ou plié tous les 29.4mm
Longueur maximum pour le circuit flexible 5 mètres.

Il est possible de brancher en parallèle plusieurs bandeaux sur la même alimentation

Pour rétablir le niveau IP, consultez la notice de montage dans le carton ou notre site internet.

LED Lichtband für aussen von 5 Meter.

LED 2835, Hergestellt auf einem flexiblen Schaltkreis, der mit Silikon versiegelt und mit einem 3M Aufkleber auf der Rückseite versehen ist.
238 LED/m - 1190 LED/5m

Lebensdauer 50.000h

Alle 29.4mm schneid- oder biegbare.
Maximal zulässige Länge des Bandes beträgt 5 Meter.

Mehrere LED-Lichtbänder sollten parallelgeschaltet werden

Um den IP-Schutzgrad wieder herzustellen, folgen Sie den Anweisungen in der Verpackung oder von der Website herunterladbar.

Alimentatori da ordinare separatamente - Power supplies to be ordered separately - Unités d'alimentation à commander séparément - Netzgerät separat zu bestellen

Code	IP20	W	max m	Code	IP20	W	max m	Code	IP67	W	max m	Code	IP67	W	max m
5855		20	1.0	5801	(PUSH/DIM1-10V)	100	6.0	5788		25	1.5	5784		100	6.0
5674		70	4.0	5802/T	(PUSH/DALI)	100	6.0	5789		40	2.5	5672		150	9.0
5678		75	4.5					5782		60	3.5	5676		150	9.0
5677		120	7.0					5673		70	4.0	5785		240	14.0
5675		150	9.0					5783		75	4.5	5786		320	19.0

calcolo eseguito con tolleranza assorbimento +20% - calculation with an electrical absorption tolerance of +20%

Kit emergenza disponibile su richiesta - Emergency kit available upon request - Kit éclairage secouru disponible sur demande - Notfall Kit auf Anfrage erhältlich.

Code	Descrizione	Description	Description	Beschreibung
KIT EM/LED/1H	Kit emergenza per LED 1 ora - Batt.7.2V - 1.5Ah	Emergency kit for LED1 hour - Batt.7.2V - 1.5Ah	Kit éclairage secouru pour LED 1 heure - Batt.7.2V - 1.5Ah	Notfall Kit für LED1 Stunde - Batt.7.2V - 1.5Ah
KIT EM/LED/3H	Kit emergenza per LED 3 ore - Batt.7.2V - 4Ah	Emergency kit for LED3 hours - Batt.7.2V - 4Ah	Kit éclairage secouru pour LED 3 heures - Batt.7.2V - 4Ah	Notfall Kit für LED3 Stunden - Batt.7.2V - 4Ah

Unità di gestione da ordinare separatamente – *Control units to be ordered separately*

Code	Descrizione	Description
5856	Dimmer PWM PUSH/DIM 0/1-10V	Dimmer PWM PUSH/DIM/1-10V
5834/B	Centralina Bluetooth RGB-RGBW-Tunable White-Dimming	RGB-RGBW-Tunable White-Dimming Bluetooth control unit
186155/DIMMER	Dimmer 1-10V monocolor	Dimmer 1-10V mono-colour
5854	Dimmer DALI monocolor	DALI mono-color dimmer
5950/TW	Centralina di controllo Tunable White e Dimming	Tunable White and Dimming control unit
5951/C	Telecomando a 4 zone per centralina 5950/TW	Remote controller 4 zones for 5950/TW control unit
5952/T	Pannello Touch da parete a 4 zone per centralina 5950/TW	Wall touch panel 4 zones for 5950/TW control unit

Per ulteriori unità di gestione, vedi catalogo Lineare - *For further control units, see Linear catalogue*

Profili in alluminio idonei per un'adeguata dissipazione, da ordinare separatamente
Aluminium profiles suggested for a suitable heat dissipation, to be ordered separately.

2m da superficie, parete e plafone - *wall and ceiling surface-mounted of 2m*

Code		
Trasparente/Transparent	Opale/Opal	Acidato/Acid-etched
BARRA/STRIP/7	Lens	Lens
BARRA/STRIP/10	BARRA/STRIP/10/S	BARRA/STRIP/10/A
PA/04	PA/04/S	--
PA/06	PA/06/S	--

2m da incasso - *recessed-mounted 2m*

Code		
Trasparente/Transparent	Opale/Opal	Acidato/Acid-etched
BARRA/STRIP/9	BARRA/STRIP/9/S	BARRA/STRIP/9/A
BARRA/STRIP/16	BARRA/STRIP/16/S	BARRA/STRIP/16/A
BARRA/STRIP/17	BARRA/STRIP/17/S	BARRA/STRIP/17/A
PA/07	PA/07/S	--

2m angolare - *angled 2m*

Code		
Trasparente/Transparent	Opale/Opal	Acidato/Acid-etched
BARRA/STRIP/11	BARRA/STRIP/11/S	BARRA/STRIP/11/A
BARRA/STRIP/12	BARRA/STRIP/12/S	BARRA/STRIP/12/A