


91000 ALUMINIUM

Code (white)	Code (black)	Nominal/lm	W	CCT	Beam
91000/45/3K/W	91000/45/3K/B	80	1	3000K	45°
91000/45/4K/W	91000/45/4K/B	90	1	4000K	45°

2 ANNI DI GARANZIA • YEARS OF GUARANTEE

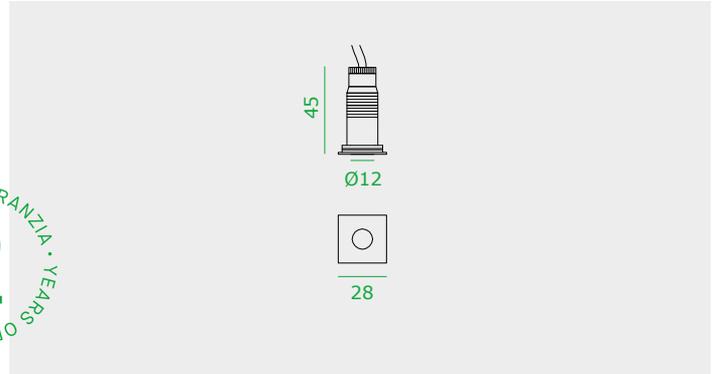

CRI >80	45°	25mm	350mA	DRIVER NOT INCLUDED	S series	IP65	CE	III
---------	-----	------	-------	---------------------	----------	------	----	-----

Downlight LED quadro per installazione a parete o a soffitto.

Square recessed LED luminaire for wall or ceiling installation.

Luminaire carré pour installation au plafond ou murale.

LED-Strahler, quadrat, für Decken- und Wandinstallation.

LED CREE

CREE LED

LED CREE

CREE LED

Life time 50.000h (rendimento 70%).

Life time 50.000h (70% lumen maintenance).

Durée de vie 50.000h (rendement 70%).

Lebensdauer 50.000h (Lichtstrom 70%).

Anello in alluminio verniciato bianco o nero. Corpo in alluminio anodizzato nero. Molla per controsoffitto.

Ring in white or black painted aluminium. Body in black anodized aluminium. Fixing spring for suspended ceiling.

Collerette peinte blanc ou noir. Corps en aluminium anodisé noir. Ressort pour faux-plafond.

Aluminiumring weiss oder schwarz lackiert. Gehäuse aus schwarz eloxiertem Aluminium. Feder für abgehängte Deckeninstallation.

Lente in metacrilato. Cavo in neoprene H05RN-F 2x0,75mm<sup>2</sup> di 0,5m.

Methacrylate lens. Neoprene H05RN-F 2x0,75mm<sup>2</sup> cable of 0,5m.

Lentilles en méthacrylate. Câble en néoprène H05RN-F 2x0,75mm<sup>2</sup> de 0,5m.

Methacrylat Linse. Neopren Kabel H05RN-F 2x0,75mm<sup>2</sup> - 0,5m.

Il collegamento di più apparecchi ad un solo alimentatore va effettuato in serie

In case more fittings have to be connected to one power supply, connect them in series

Il est possible de brancher en série plusieurs appareils sur la même alimentation



Mehrere LED-Leuchten sollten reihengeschaltet werden

Alimentatore non incluso.

Power supply not included.

Alimentation non incluse.

Netzgerät nicht enthalten.

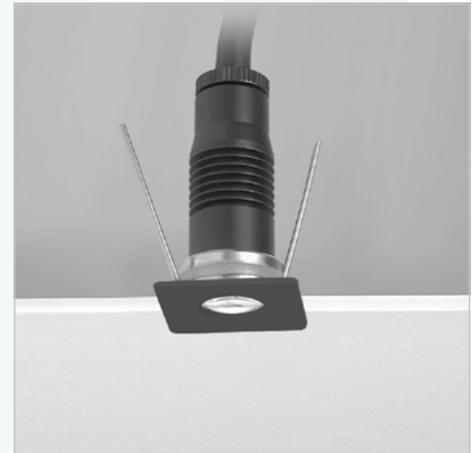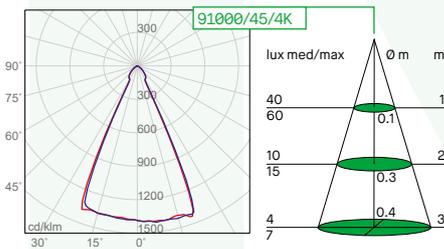

Alimentatori da ordinare separatamente - Power supplies to be ordered separately - Unités d'alimentation à commander séparément - Netzgerät separat zu bestellen.

Code	Output Power W		mA	IP	n. apparecchi / n. fittings		Dimmer
	min.	max.			min.	max.	
5701	0	3	350	IP20	1	2	/
5720	0	8	350	IP20	1	7	/
5730	0	11	350	IP20	1	9	/
5780	0	15	350	IP20	1	14	/
5722	1	14	350	IP67	1	12	/