




DL013

Code	Nominal/lm	W	CCT	Beam
DL013/24/BI	970	10	3000K	24°
DL013/24/NE	970	10	3000K	24°
DL013/40/BI	970	10	3000K	40°
DL013/40/NE	970	10	3000K	40°
DL013/50/BI	970	10	3000K	50°
DL013/50/NE	970	10	3000K	50°



Apparecchio LED a plafone per installazione a soffitto.

LED fitting for ceiling installation.

Appareil LED pour installation au plafond.

LED Deckenleuchte.

Lumens AC LED.

Lumens AC LED.

Lumens AC LED.

Lumens AC LED.

Lifetime 40.000h (rendimento 70%).

Lifetime 40.000h (70% lumen maintenance).

Durée de vie 40.000h (rendement 70%).

Lebensdauer 40.000h (Lichtstrom 70%).

Corpo in alluminio verniciato bianco o nero.

Body in white or black-painted aluminium.

Corps en aluminium peint blanc ou noir.

Gehäuse aus weiss oder schwarz lackiertem Aluminium.

Riflettore intercambiabile in alluminio anodizzato.

Anodised aluminium interchangeable reflector.

Optique en aluminium anodisé.

Aluminium. Optik aus eloxiertem Aluminium.

Diffusore microprismatico.

Microprismatic diffuser.

Diffuseur micro-prismatique.


Mikroprismen-Difusor.

Alimentazione a tensione di rete 220-240V.

220-240V direct connection.

Alimentation directe 220-240V.

Spannungsversorgungsnetz 220-240V.

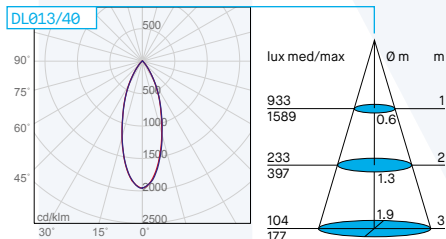

Accessori su richiesta - Accessories upon request - Accessoires disponibles sur demande - Zubehör auf Anfrage

Code	Descrizione	Description	Description	Beschreibung
LENS/24/DL013	Lente 24° per DL013	24° lens for DL013	Lentille 24° - DL013	24° Linse für DL013
LENS/40/DL013	Lente 40° per DL013	40° lens for DL013	Lentille 40° - DL013	40° Linse für DL013
LENS/50/DL013	Lente 50° per DL013	50° lens for DL013	Lentille 50° - DL013	50° Linse für DL013