




EL1200 UGR (Bianco/White/Blanc/Weiss)

Code	Nominal/lm	Real/lm	LED/W	System/W	CCT	Beam	Driver
EL1200/3K/WU	3780	3070	28	31	3000K	110°-70°	on-off
EL1200/4K/WU	4060	3298	28	31	4000K	110°-70°	on-off

EL1200 UGR (Nero/Black/Noir/Schwarz)

Code	Nominal/lm	Real/lm	LED/W	System/W	CCT	Beam	Driver
EL1200/3K/BU	3780	3070	28	31	3000K	110°-70°	on-off
EL1200/4K/BU	4060	3298	28	31	4000K	110°-70°	on-off

3 ANNI DI GARANZIA
3 YEARS OF GUARANTEE

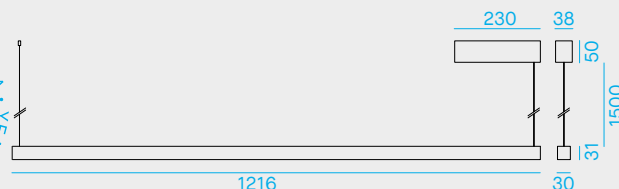

CRI >80	110°	70°	UGR <19	DRIVER INCLUDED	B	W	IP20	CE	F	⊕
---------	------	-----	---------	-----------------	---	---	------	----	---	---

Profilo lineare LED bi-emissione per installazione a sospensione.

LED HONGLI CRI80

Life time >36.000h

Profilo in alluminio estruso verniciato bianco o nero.
Testate di chiusura in alluminio.

Kit di sospensione con microregolazione e rosone con alimentatore integrato.

Sistema ottico UGR<19

Alimentatore 220-240V 50/60Hz incluso.

Led linear bi-emission profile for suspended installation.

HONGLI LED CRI80.

Life time >36.000h

White or black painted extruded aluminium body.
Aluminium end caps.

Suspension kit with micro-adjustment system, 1500mm suspension steel ropes and rose with integrated power supply.

Optics system for UGR<19.

220-240V 50/60Hz power supply included.

Profil linéaire LED bi-émission pour installation en suspension

LED Hongli. CRI80.

Durée de vie >36.000h

Profil en aluminium extrudé peint blanc ou noir. Embouts de fermeture en aluminium.

Kit suspension avec système de micro-régulation, fils de suspension en acier 1500mm et rosace avec alimentation incluse.

Optique pour UGR<19.

Alimentation 220-240V - 50/60Hz incluse.

Lineares Led Bi-Emissions-Profil für Pendel-Installation.

Hongli LED. CRI80.


Lebensdauer >36.000h

Körper aus weiss oder schwarz lackiertem extrudiertem Aluminium.

Pendel-Kit mit MikroEinstellsystem, 1500mm Aufhängeseile aus Stahl und Baldachin mit integrierter Stromversorgung.

Optik für UGR <19.

Netzgerät 220-240V 50/60Hz enthalten.

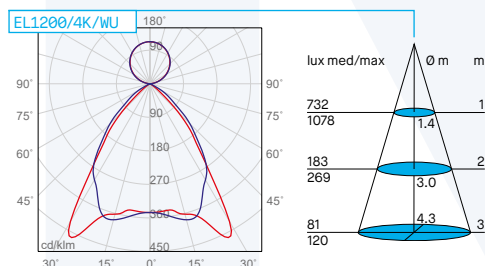

Flusso complessivo. Percentuale flusso diretto 75%,
flusso indiretto 25%

Total flux. 75% direct flux, 25% indirect flux

Flux total: 75% flux direct, 25% flux indirect

Gesamt-Lichtstrom 75% direkter Lichtstrom, 25% indirekter Lichtstrom.



Versioni prodotto disponibili su richiesta - Product versions available upon request - Versions du produit disponibles sur demande - Produktversion auf Anfrage erhältlich

Code	Descrizione	Description	Description	Beschreibung
EL1200/___/WU/1	EL1200/___/BU/1	Con driver ON-OFF Made in Italy	With Made in Italy ON-OFF driver	Avec alimentation ON-OFF Made in Italy
EL1200/___/WU/2	EL1200/___/BU/2	Con driver DIM 1-10V Made in Italy	With Made in Italy DIM 1-10V driver	Avec alimentation DIM 1-10V Made in Italy
EL1200/___/WU/2P	EL1200/___/BU/2P	Con driver PUSH Made in Italy	With Made in Italy PUSH driver	Avec alimentation PUSH Made in Italy
EL1200/___/WU/3	EL1200/___/BU/3	Con driver DALI Made in Italy	With Made in Italy DALI driver	Avec alimentation DALI Made in Italy