

2 ANNI DI GARANZIA  
2 YEARS OF WARRANTY

F1

Code	Nominal/1m	W	CCT	Beam	Colour
F1/N/3K/A	200	2	3000K	18°	A
F1/N/4K/A	300	2	4000K	18°	
F1/M/3K/A	200	2	3000K	35°	
F1/M/4K/A	300	2	4000K	35°	W
F1/N/3K/W	200	2	3000K	18°	
F1/N/4K/W	300	2	4000K	18°	
F1/M/3K/W	200	2	3000K	35°	G
F1/M/4K/W	300	2	4000K	35°	
F1/N/3K/G	200	2	3000K	18°	
F1/N/4K/G	300	2	4000K	18°	G
F1/M/3K/G	200	2	3000K	35°	
F1/M/4K/G	300	2	4000K	35°	

CRI >80
18°
35°
Vdc 24
DRIVER NOT INCLUDED
P parallel
A
G
W
IK06
IP65
CE
III

Proiettore LED con staffa e picchetto per installazione a parete, soffitto e pavimento.

LED projector with bracket or base for wall-mounted, ceiling and ground installation.

Projecteur LED avec support et piquet pour montage mural, plafond et installation au sol.

Flutlicht-LED mit Halterung und Pflock für Wandmontage, Decke und Bodeninstallation.

LED CREE  
Lifetime 30.000h (rendimento 70%).

CREE LED  
Lifetime 30.000h (70% lumen maintenance).

LED CREE  
Durée de vie 30.000h (rendement 70%).

CREE LED  
Lebensdauer 30.000h (Lichtstrom 70%).

Corpo in alluminio pressofuso verniciato bianco, grigio o antracite. Vetro temperato trasparente.

Body in white, grey or anthracite painted aluminium. Transparent tempered glass diffuser.

Corps en aluminium peint en blanc, gris ou anthracite. Diffuseur en verre trempé transparent.

Gehäuse aus weiß, grau oder anthrazit lackiertem Aluminium. Transparenter Diffusor aus gehärtetem Glas.

Cavo in neoprene H05RN-F 2x0.5mm<sup>2</sup> di 2m. Picchetto incluso nella confezione.

Neoprene H05RN-F 2x0.5mm<sup>2</sup> cable of 2m. Spike included.

Câble en néoprène H05RN-F 2x0.5mm<sup>2</sup> de 2m. Spike inclus.

Neopren-Kabel H05RN-F 2x0.5mm<sup>2</sup> von 2m. Spike enthalten.

Il collegamento di più apparecchi ad un solo alimentatore va effettuato in parallelo.

In case more fittings have to be connected to one power supply, connect them in parallel.

Il est possible de brancher en parallèle plusieurs appareils sur la même alimentation.


Mehrere LED-Leuchten sollten parallelgeschaltet werden.

Alimentatore 24Vdc non incluso.

24Vdc power supply not included.

Alimentation 24Vdc non incluse.

Netzgerät 24Vdc nicht enthalten.

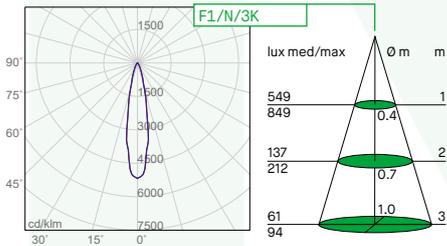

G



A

Code	W	Vdc	IP	max n. apparecchi / max n. fittings	
				F1	F2
5788	25	24	IP67	10	5
5789	40	24	IP67	17	8
5782	60	24	IP67	25	13
5674	70	24	IP20	29	15
5673	70	24	IP67	29	15
5783	75	24	IP67	31	16
5784	100	24	IP67	42	21
5672	150	24	IP67	63	31
5675	150	24	IP20	63	31

Alimentatori da ordinare separatamente

Power supplies to be ordered separately

Unités d'alimentation à commander séparément

Netzgerät separat zu bestellen