




ICE10 B

Code	Nominal/lm	Real/lm	System/W	CCT
IC10/3K/A	450	193	5	3000K
IC10/3K/G	450	193	5	3000K
IC10/3K/W	450	193	5	3000K
IC10/4K/A	650	278	5	4000K
IC10/4K/G	650	278	5	4000K
IC10/4K/W	650	278	5	4000K

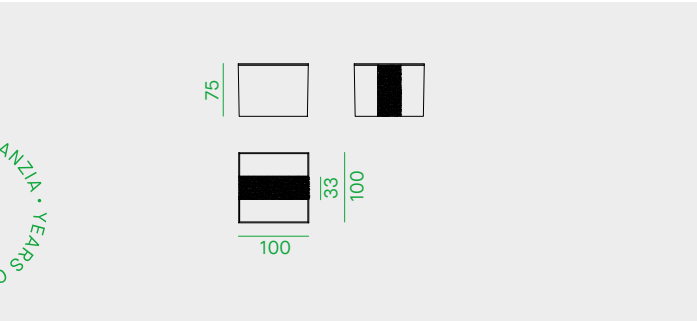

CRI

>80

V

220-240

IP65

CE

A

G

W

Mind in Italy

Applique LED quadrata o rettangolare IP65 per installazione a parete o a plafone.	IP65 square or rectangular LED luminaire for wall-mounted or ceiling installation.	Applique LED carré ou rectangulaire IP65 pour installation murale ou au plafond.	IP65 quadratische oder rechteckige LED-Leuchte für Wand- oder Decken-Installation
LED 2835	2835 LED.	LED 2835.	2835 LED.
Lifetime 30.000h (rendimento 70%).	Lifetime 30.000h (70% lumen maintenance).	Durée de vie 30.000h (rendement 70%).	Lebensdauer 30.000h (Lichtstrom 70%).
Corpo in polycarbonato bianco e diffusore opale. Fascia colorata antracite, grigia o bianca.	White polycarbonate body, opal diffuser. Belt colour: anthracite, grey or white.	Corps en polycarbonate blanc, diffuseur opale. Couleur bande: anthracite, gris ou blanc.	Weisser PC-Körper, opaker Diffusor. Farbe des Ringes: anthrazit, grau oder weiss
Scheda LED a tensione di rete 220-240V	220-240V LED board.	LED en tension 220-240V.	LED, Netzspannung 220-240V.

