



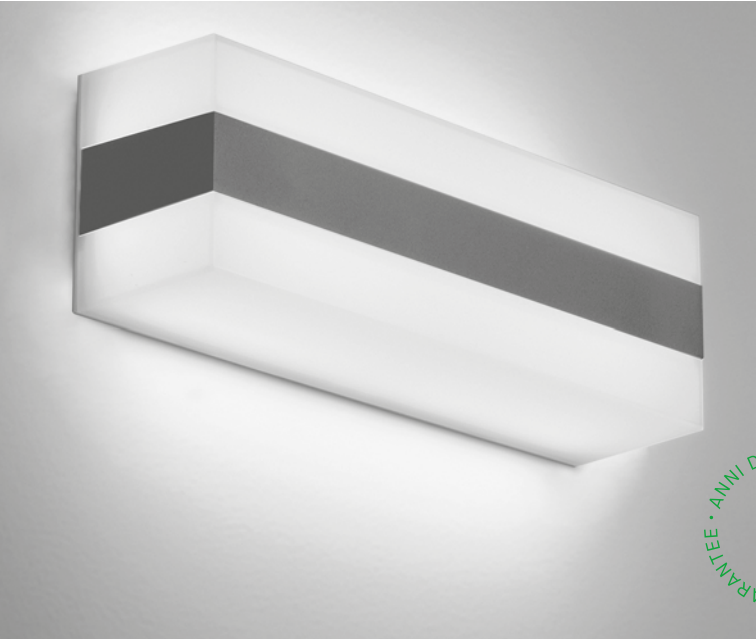

ICE30 B

Code	Nominal/lm	Real/lm	System/W	CCT
IC30/3K/A	1350	851	12	3000K
IC30/3K/G	1350	851	12	3000K
IC30/3K/W	1350	851	12	3000K
IC30/4K/A	1550	977	12	4000K
IC30/4K/G	1550	977	12	4000K
IC30/4K/W	1550	977	12	4000K



CRI

>80

V

220-240

IP65

CE

A

G

W

Mind in Italy

Applique LED quadrata o rettangolare IP65 per installazione a parete o a plafone.

IP65 square or rectangular LED luminaire for wall-mounted or ceiling installation.

Applique LED carré ou rectangulaire IP65 pour installation murale ou au plafond.

IP65 quadratische oder rechteckige LED-Leuchte für Wand- oder Decken-Installation

LED 2835

2835 LED.

LED 2835.

2835 LED.

Lifetime 30.000h (rendimento 70%).

Lifetime 30.000h (70% lumen maintenance).

Durée de vie 30.000h (rendement 70%).

Lebensdauer 30.000h (Lichtstrom 70%).

Corpo in polycarbonato bianco e diffusore opale. Fascia colorata antracite, grigia o bianca.

White polycarbonate body, opal diffuser. Belt colour: anthracite, grey or white.

Corps en polycarbonate blanc, diffuseur opale. Couleur bande: anthracite, gris ou blanc.

Weisser PC-Körper, opaker Diffusor. Farbe des Ringes: anthrazit, grau oder weiss

Scheda LED a tensione di rete 220-240V

220-240V LED board.

LED en tension 220-240V.

LED, Netzspannung 220-240V.

