





L05F (fisso - fixed)

Code	Frame	Nominal/lm	Real/lm	LED/W	System/W	CCT	Beam
L05F/WCM/3K11/_	W	1050	963	11	13	3000K	25°
L05F/WCM/4K11/_		1100	1009	11	13	4000K	25°
L05F/WCF/3K11/_		1050	890	11	13	3000K	40°
L05F/WCF/4K11/_	B	1100	932	11	13	4000K	40°
L05F/BCM/3K11/_		1050	963	11	13	3000K	25°
L05F/BCM/4K11/_		1100	1009	11	13	4000K	25°
L05F/BCF/3K11/_		1050	890	11	13	3000K	40°
L05F/BCF/4K11/_		1100	932	11	13	4000K	40°

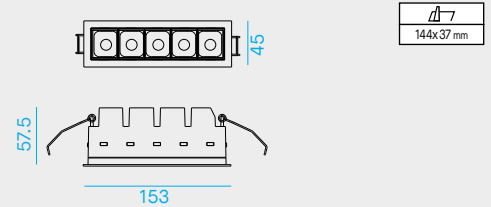

Incasso a LED per installazione a soffitto. Versione fissa.

LED OSRAM CRI>90

Lifetime 50.000h (L70B10).

Corpo in alluminio. Cornice bianco o nera.

Riflettori in policarbonato in 4 finiture diverse:
 B= nero
 M= argento opaco
 W= bianco
 G= oro

Alimentatore 220-240V - 50/60Hz incluso.

Recessed LED fitting for false ceiling installation. Fixed version.

OSRAM LED CRI>90

Lifetime 50.000h (L70B10).

Body in aluminium. White or black frame.

Polycarbonate reflector in 4 different finishing:
 B= black
 M= silver mat
 W= white
 G= gold

220-240V - 50/60Hz power supply included.

Appareil à encastrer LED pour installation dans faux-plafond. Version fixe.

LED OSRAM IRC>90

Durée de vie 50.000h (L70B10).

Corps en aluminium. Cadre blanc ou noir.

Réflecteur en polycarbonate en 3 finitions différentes :
 B= noir
 M= argent mat
 W= blanc
 G= or

Alimentation 220-240V - 50/60Hz incluse.

LED-Einbau für Deckeninstallation in 3 Massen.



LED OSRAM CRI>90

Lebensdauer 50.000h (L70B10).

Körper Aluminium. Weißer oder schwarzer Rahmen

Polycarbonat Reflektor in 4 verschiedenen Ausführungen:
 B= Schwarz
 M= Silber matt
 W= Weiss
 G= Gold

Netzgerät 220-240V - 50/60Hz enthalten.




Versioni prodotto disponibili su richiesta - Product versions available upon request - Versions du produit disponibles sur demande - Produktversion auf Anfrage erhältlich

Code	Description
L05F/___/___/_1	ON-OFF Made in Italy
L05F/___/___/_2	PUSH/DIM 1-10V Made in Italy
L05F/___/___/_3	DALI Made in Italy
L05F/___/___/_6	ON-OFF
L05F/___/___/_9	Wi-Fi ZIGBEE Made in Italy (Zigbee gateway, not included)
L05F/___/___/_10	Bluetooth BLL Made in Italy (by APP BLL PLUS: IOS/Android)
L05F/___/___/_11	Bluetooth CASAMBI Made in Italy (by APP CASAMBI: IOS/Android)

Gestione della luce / Light management, see [cat.42](#)


Kit emergenza disponibile su richiesta - Emergency kit available upon request - Kit éclairage secours disponible sur demande - Notfall Kit auf Anfrage erhältlich.

Code	Descrizione	Description	Description	Beschreibung
KIT EM/LED/1H	Kit emergenza per LED 1 ora - Batt.7.2V - 1.5Ah	Emergency kit for LED 1 hour - Batt.7.2V - 1.5Ah	Kit éclairage secours pour LED 1 heure - Batt.7.2V - 1.5Ah	Notfall Kit für LED 1 Stunde - Batt.7.2V - 1.5Ah
KIT EM/LED/3H	Kit emergenza per LED 3 ore - Batt.7.2V - 4Ah	Emergency kit for LED 3 hours - Batt.7.2V - 4Ah	Kit éclairage secours pour LED 3 heures - Batt.7.2V - 4Ah	Notfall Kit für LED 3 Stunden - Batt.7.2V - 4Ah



L05A (orientabile - adjustable)

Code	Frame	Nominal/lm	Real/lm	LED/W	System/W	CCT	Beam
L05A/WCM/3K11/_	W	1050	963	11	13	3000K	25°
L05A/WCM/4K11/_		1100	1009	11	13	4000K	25°
L05A/WCF/3K11/_		1050	890	11	13	3000K	40°
L05A/WCF/4K11/_	B	1100	932	11	13	4000K	40°
L05A/BCM/3K11/_		1050	963	11	13	3000K	25°
L05A/BCM/4K11/_		1100	1009	11	13	4000K	25°
L05A/BCF/3K11/_		1050	890	11	13	3000K	40°
L05A/BCF/4K11/_		1100	932	11	13	4000K	40°

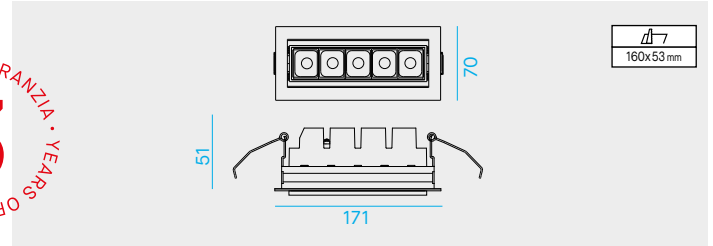

Incasso a LED per installazione a soffitto. Versione orientabile.

Recessed LED fitting for false ceiling installation. Adjustable version.

Appareil à encastrer LED pour installation dans faux-plafond. Version réglable.

LED-Einbau für Deckeninstallation in 3 Massen.

LED OSRAM CRI>90

OSRAM LED CRI>90

LED OSRAM IRC>90

LED OSRAM CRI>90

Lifetime 50.000h (L70B10).

Lifetime 50.000h (L70B10).

Durée de vie 50.000h (L70B10).

Lebensdauer 50.000h (L70B10).

Corpo in alluminio. Cornice bianco o nera.

Body in aluminium. White or black frame.

Corps en aluminium. Cadre blanc ou noir.

Körper Aluminium. Weißer oder schwarzer Rahmen

Riflettori in policarbonato in 4 finiture diverse:
B= nero
M= argento opaco
W= bianco
G= oro

Polycarbonate reflector in 4 different finishing:
B= black
M= silver mat
W= white
G= gold

Réflecteur en polycarbonate en 3 finitions différentes :
B= noir
M= argent mat
W= blanc
G= or



Polycarbonat Reflektor in 4 verschiedenen Ausführungen:
B= Schwarz
M= Silber matt
W= Weiss
G= Gold

Alimentatore 220-240V - 50/60Hz incluso.

220-240V - 50/60Hz power supply included.

Alimentation 220-240V - 50/60Hz incluse.

Netzgerät 220-240V - 50/60Hz enthalten.

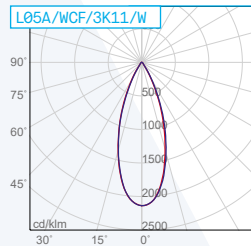

Versioni prodotto disponibili su richiesta - Product versions available upon request - Versions du produit disponibles sur demande - Produktversion auf Anfrage erhältlich

Code	Description
L05A/_/_/_/_/_1	ON-OFF Made in Italy
L05A/_/_/_/_/_2	PUSH/DIM 1-10V Made in Italy
L05A/_/_/_/_/_3	DALI Made in Italy
L05A/_/_/_/_/_6	ON-OFF
L05A/_/_/_/_/_9	Wi-Fi ZIGBEE Made in Italy (Zigbee gateway, not included)
L05A/_/_/_/_/_10	Bluetooth BLL Made in Italy (by APP BLL PLUS: IOS/Android)
L05A/_/_/_/_/_11	Bluetooth CASAMBI Made in Italy (by APP CASAMBI: IOS/Android)

Gestione della luce / Light management, see [cat.42](#)


Kit emergenza disponibile su richiesta - Emergency kit available upon request - Kit éclairage secours disponible sur demande - Notfall Kit auf Anfrage erhältlich.

Code	Descrizione	Description	Description	Beschreibung
KIT EM/LED/1H	Kit emergenza per LED 1 ora - Batt.7.2V - 1.5Ah	Emergency kit for LED 1 hour - Batt.7.2V - 1.5Ah	Kit éclairage secours pour LED 1 heure - Batt.7.2V - 1.5Ah	Notfall Kit für LED 1 Stunde - Batt.7.2V - 1.5Ah
KIT EM/LED/3H	Kit emergenza per LED 3 ore - Batt.7.2V - 4Ah	Emergency kit for LED 3 hours - Batt.7.2V - 4Ah	Kit éclairage secours pour LED 3 heures - Batt.7.2V - 4Ah	Notfall Kit für LED 3 Stunden - Batt.7.2V - 4Ah



L05F/_W (wallwasher)

Code	Frame	Nominal/lm	Real/lm	LED/W	System/W	CCT	Beam
L05F/WCW/3K11/M	W	1050	499	11	13	3000K	--
L05F/WCW/4K11/M	W	1100	523	11	13	4000K	--
L05F/BCW/3K11/M	B	1050	499	11	13	3000K	--
L05F/BCW/4K11/M	B	1100	523	11	13	4000K	--

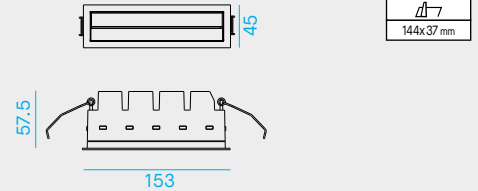

Incastro a LED per installazione a soffitto. Versione wallwasher.

Recessed LED fitting for false ceiling installation. Wallwasher version.

Appareil à encastrer LED pour installation dans faux-plafond. Version wallwasher.

LED-Einbau für Deckeninstallation in 3 Massen.

LED OSRAM CRI>90

OSRAM LED CRI>90

LED OSRAM IRC>90

LED OSRAM CRI>90

Lifetime 50.000h (L70B10).

Lifetime 50.000h (L70B10).

Durée de vie 50.000h (L70B10).

Lebensdauer 50.000h (L70B10).

Corpo in alluminio. Cornice bianco o nera.

Body in aluminium. White or black frame.

Corps en aluminium. Cadre blanc ou noir.

Körper Aluminium. Weißer oder schwarzer Rahmen

Riflettore in policarbonato: M= argento opaco

Polycarbonate reflector: M= silver mat

Réflecteur en polycarbonate: M= argent mat


Polycarbonat Reflektor: M= Silber matt

Alimentatore 220-240V - 50/60Hz incluso.

220-240V - 50/60Hz power supply included.

Alimentation 220-240V - 50/60Hz incluse.

Netzgerät 220-240V - 50/60Hz enthalten.

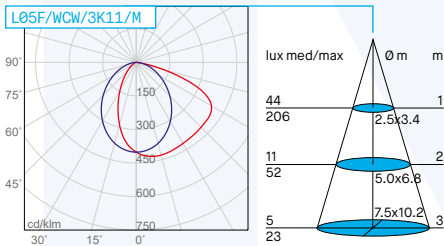

Versioni prodotto disponibili su richiesta - Product versions available upon request - Versions du produit disponibles sur demande - Produktversion auf Anfrage erhältlich

Code	Description
L05F/_W/_/_/M1	ON-OFF Made in Italy
L05F/_W/_/_/M2	PUSH/DIM 1-10V Made in Italy
L05F/_W/_/_/M3	DALI Made in Italy
L05F/_W/_/_/M6	ON-OFF
L05F/_W/_/_/M9	Wi-Fi ZIGBEE Made in Italy (Zigbee gateway, not included)
L05F/_W/_/_/M10	Bluetooth BLL Made in Italy (by APP BLL PLUS: IOS/Android)
L05F/_W/_/_/M11	Bluetooth CASAMBI Made in Italy (by APP CASAMBI: IOS/Android)

Gestione della luce / Light management, see cat.42

Kit emergenza disponibile su richiesta - Emergency kit available upon request - Kit éclairage secours disponible sur demande - Notfall Kit auf Anfrage erhältlich

Code	Descrizione	Description	Description	Beschreibung
KIT EM/LED/1H	Kit emergenza per LED 1 ora - Batt.7.2V - 1.5Ah	Emergency kit for LED 1 hour - Batt.7.2V - 1.5Ah	Kit éclairage secours pour LED 1 heure - Batt.7.2V - 1.5Ah	Notfall Kit für LED 1 Stunde - Batt.7.2V - 1.5Ah
KIT EM/LED/3H	Kit emergenza per LED 3 ore - Batt.7.2V - 4Ah	Emergency kit for LED 3 hours - Batt.7.2V - 4Ah	Kit éclairage secours pour LED 3 heures - Batt.7.2V - 4Ah	Notfall Kit für LED 3 Stunden - Batt.7.2V - 4Ah