




5 ANNI DI GARANZIA
YEARS OF WARRANTY

MMSA/C

| Code | Nominal/lm | Real/lm | LED/W | System/W | CCT | Beam |
|----------------|------------|---------|-------|----------|-------|------|
| MMSA/CM/2K04/_ | 480 | 333 | 4 | 6 | 2700K | 20° |
| MMSA/CM/3K04/_ | 500 | 347 | 4 | 6 | 3000K | 20° |
| MMSA/CM/4K04/_ | 550 | 382 | 4 | 6 | 4000K | 20° |
| MMSA/CF/2K04/_ | 480 | 283 | 4 | 6 | 2700K | 40° |
| MMSA/CF/3K04/_ | 500 | 295 | 4 | 6 | 3000K | 40° |
| MMSA/CF/4K04/_ | 550 | 324 | 4 | 6 | 4000K | 40° |



| | | | | | | | | | | | | |
|---------|---------|---|---|-----------------|---------|------|----|---|---|----|----|---|
| CRI >90 | 45x45mm | M | F | DRIVER INCLUDED | UGR <16 | IP20 | CE | V | □ | A+ | A+ | A |
|---------|---------|---|---|-----------------|---------|------|----|---|---|----|----|---|

Incasso orientabile quadro a LED per installazione a soffitto.

Square adjustable recessed LED fitting for false ceiling installation.

Appareil à encastrer LED orientable carré pour installation dans faux-plafond

Quadratischer LED-Einbau für Deckeninstallation

LED CREE CRI>90

CREE LED CRI>90

LED CREE IRC>90

LED CREE CRI>90

Life time 50.000h (L70B10).

Life time 50.000h (L70B10).

Durée de vie 50.000h (L70B10).

Lebensdauer 50.000h (L70B10).

Corpo in alluminio pressofuso.

Body in die-cast aluminium.

Corps en fonderie d'aluminium.

Aluminium-Druckguss Körper.

Cornice in alluminio verniciato bianco.

Frame in white painted aluminium.

Cadre en aluminium peint blanc.

Weiss lackierter Aluminium Rahmen.

Doppio sistema ottico con lente e riflettore che migliora il comfort visivo.

Double optical system with lens and reflector to improve the visual comfort.

Double système optique avec lentille et réflecteur pour un meilleur confort visuel.

Dual-optisches System mit einer Linse und Reflektor die den Sehkomfort verbessern.

Disponibili accessori intercambiabili:
- riflettore in policarbonato in tre finiture diverse;
- griglia anti abbagliamento.

Interchangeable accessories available upon request:
- polycarbonate reflector in 3 different finishing;
- anti-glare grid.

Disponibles accessoires interchangeables:
- réflecteur en polycarbonate en 3 finitions différentes;
- grille anti éblouissement.




Austauschbare Zubehör erhältlich:
- Polycarbonat Reflektor in 3 verschiedenen Ausführungen;
- Entblendungs Gitter.

Alimentatore 220-240V - 50/60Hz incluso. (ON-OFF, PUSH, DIM 1-10V, DALI)

220-240V - 50/60Hz power supply included. (ON-OFF, PUSH, DIM 1-10V, DALI)

Alimentation 220-240V - 50/60Hz incluse. (ON-OFF, PUSH, DIM 1-10V, DALI)

Netzgerät 220-240V - 50 / 60Hz enthalten. (ON-OFF, PUSH, DIM 1-10V, DALI)

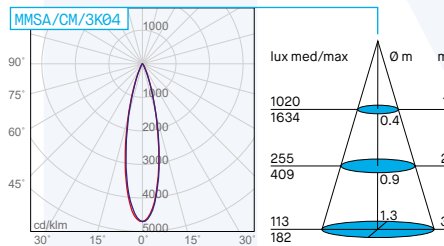

Completare il codice prodotto identificando il driver - Choose the driver version you need to complete the product's code

| Code | Descrizione | Description | Description | Beschreibung |
|-------------------|------------------------------------|-------------------------------------|---|------------------------------------|
| MMSA/C/_/_/_/_/1 | Con driver ON-OFF Made in Italy | With Made in Italy ON-OFF driver | Avec alimentation ON-OFF Made in Italy | Mit Driver ON-OFF Made in Italy |
| MMSA/C/_/_/_/_/2 | Con driver DIM 1-10V Made in Italy | With Made in Italy DIM 1-10V driver | Avec alimentation DIM 1-10V Made in Italy | Mit Driver DIM 1-10V Made in Italy |
| MMSA/C/_/_/_/_/2P | Con driver PUSH Made in Italy | With Made in Italy PUSH driver | Avec alimentation PUSH Made in Italy | Mit Driver PUSH Made in Italy |
| MMSA/C/_/_/_/_/3 | Con driver DALI Made in Italy | With Made in Italy DALI driver | Avec alimentation DALI Made in Italy | Mit Driver DALI Made in Italy |
| MMSA/C/_/_/_/_/6 | Con driver ON-OFF | With ON-OFF driver | Avec alimentation ON-OFF | Mit Driver ON-OFF |
| MMSA/C/_/_/_/_/7 | Con driver DIM 1-10V | With DIM 1-10V driver | Avec alimentation DIM 1-10V | Mit Driver DIM 1-10V |

Accessori disponibili su richiesta - Accessories available upon request

| Code | Descrizione | Description |
|------|--|--|
| 5861 | Interfaccia Bluetooth regolazione tramite APP o pulsante NA. Solo per versione /2 | Bluetooth interface, control via App or NO button. Only for version /2 |
| 5864 | Interfaccia Wi-Fi regolazione tramite gateway Zigbee (non fornito). Solo per versione /2 | Wi-Fi interface through Zigbee gateway (not included). Only for version /2 |

Kit emergenza disponibile su richiesta - Emergency kit available upon request - Kit éclairage secouru disponible sur demande - Notfall Kit auf Anfrage erhältlich.

| Code | Descrizione | Description | Description | Beschreibung |
|---------------|---|--|--|--|
| KIT EM/LED/1H | Kit emergenza per LED 1 ora - Batt.7.2V - 1.5Ah | Emergency kit for LED 1 hour - Batt.7.2V - 1.5Ah | Kit éclairage secouru pour LED 1 heure - Batt.7.2V - 1.5Ah | Notfall Kit für LED 1 Stunde - Batt.7.2V - 1.5Ah |
| KIT EM/LED/3H | Kit emergenza per LED 3 ore - Batt.7.2V - 4Ah | Emergency kit for LED 3 hours - Batt.7.2V - 4Ah | Kit éclairage secouru pour LED 3 heures - Batt.7.2V - 4Ah | Notfall Kit für LED 3 Stunden - Batt.7.2V - 4Ah |