




PLIR40

Code	Nominal/lm	Real/lm	System/W	CCT	Beam
PLIR40/3K	4200	3476	36	3000K	110°
PLIR40/4K	4200	3476	36	4000K	110°

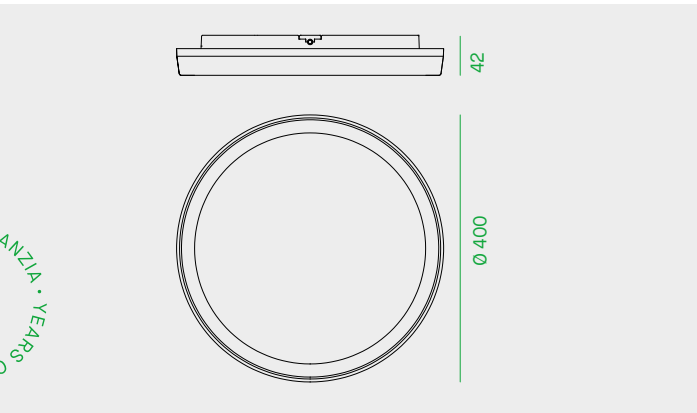

Plafoniera LED tonda IP65 per installazione a plafone e a parete.

IP65 round LED fitting for ceiling and wall-mounted installation

Plafonnier LED rond pour installation au plafond ou au mur en IP65

IP65 runde LED-Deckenleuchte für Decke- und Wandmontage.

LED 2835

2835 LED.

LED 2835

2835 LED.

Life time 30.000h (rendimento 70%).

Life time 30.000h (70% lumen maintenance).

Durée de vie 30.000h (rendement 70%).

Lebensdauer 30.000h (Lichtstrom 70%).

Corpo e anello in policarbonato bianco e diffusore opale.

White polycarbonate body and ring, opal diffuser.

Corps et collerette en polycarbonate blanc, diffuseur opale.


Gehäuse und Ring aus weissem Polycarbonat, opaler Diffusor

Alimentatore 220-240V - 50/60Hz incluso.

220-240V - 50/60Hz power supply included.

Alimentation 220-240V - 50/60Hz incluse.

Netzgerät 220-240V - 50/60Hz enthalten.

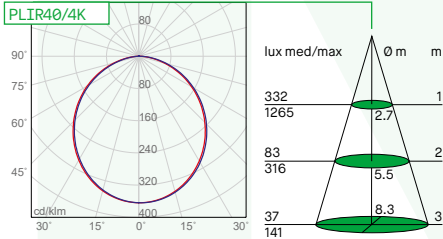

B



G

Accessori su richiesta – Accessories upon request - Accessoires disponibles sur demande – Zubehör auf Anfrage

Code	Descrizione	Description	Description	Beschreibung
ANELLO/PLIR40/B	Anello rotondo nero Ø400mm	Black round frame Ø400mm	Ring rond noir Ø400mm	Schwarzer runde Ring Ø400mm
ANELLO/PLIR40/G	Anello rotondo grigio Ø400mm	Grey round frame Ø400mm	Ring rond gris Ø400mm	Grau runde Ring Ø400mm