




PLIS40

Code	Nominal/lm	Real/lm	System/W	CCT	Beam
PLIS40/3K	4200	3379	36	3000K	110°
PLIS40/4K	4200	3379	36	4000K	110°

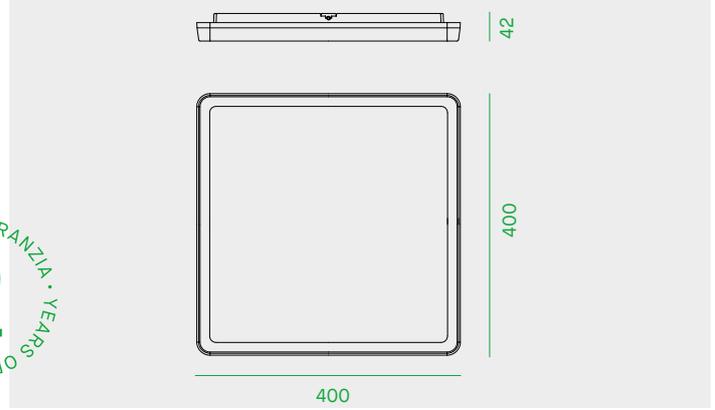

2 ANNI DI GARANZIA • YEARS OF GUARANTEE



Plafoniera LED quadra IP65 per installazione a plafone e a parete.

IP65 square LED fitting for ceiling and wall-mounted installation

Plafonnier LED carré pour installation au plafond ou au mur en IP65

IP65 quadratische LED-Deckenleuchte für Decke- und Wandmontage.

LED 2835

2835 LED.

LED 2835

2835 LED.

Life time 30.000h (rendimento 70%).

Life time 30.000h (70% lumen maintenance).

Durée de vie 30.000h (rendement 70%).

Lebensdauer 30.000h (Lichtstrom 70%).

Corpo e anello in policarbonato bianco e diffusore opale.

White polycarbonate body and ring, opal diffuser.

Corps et collerette en polycarbonate blanc, diffuseur opale.


Gehäuse und Ring aus weissem Polycarbonat, opaler Diffusor

Alimentatore 220-240V - 50/60Hz incluso.

220-240V - 50/60Hz power supply included.

Alimentation 220-240V - 50/60Hz incluse.

Netzgerät 220-240V - 50/60Hz enthalten.

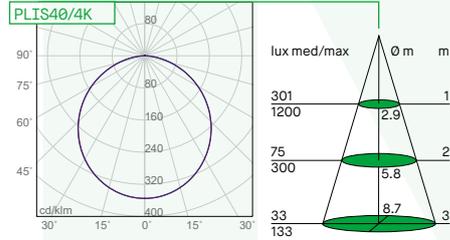

B



G

Accessori su richiesta - Accessories upon request - Accessoires disponibles sur demande - Zubehör auf Anfrage

Code	Descrizione	Description	Description	Beschreibung
ANELLO/PLIS40/B	Anello quadrato nero Ø400mm	Black square frame Ø400mm	Ring carré noir Ø400mm	Schwarzer quadratischer Ring Ø400mm
ANELLO/PLIS40/G	Anello quadrato grigio Ø400mm	Grey square frame Ø400mm	Ring carré gris Ø400mm	Grau quadratischer Ring Ø400mm