




### R41

Code	Nominal/lm	Real/lm	System/W	CCT	Beam	Driver
<b>R41/3K/15</b>	3300	2505	40	3000K	15°	on-off
<b>R41/4K/15</b>	3500	2822	40	4000K	15°	on-off
<b>R41/3K/15/8</b>	3300	2505	40	3000K	15°	DALI
<b>R41/4K/15/8</b>	3500	2822	40	4000K	15°	DALI

Code	Nominal/lm	Real/lm	System/W	CCT	Beam	Driver
<b>R41/3K/33</b>	3300	2369	40	3000K	33°	on-off
<b>R41/4K/33</b>	3500	2686	40	4000K	33°	on-off
<b>R41/3K/33/8</b>	3300	2369	40	3000K	33°	DALI
<b>R41/4K/33/8</b>	3500	2686	40	4000K	33°	DALI

Code	Nominal/lm	Real/lm	System/W	CCT	Beam	Driver
<b>R41/3K/60</b>	3300	2325	40	3000K	60°	on-off
<b>R41/4K/60</b>	3500	2607	40	4000K	60°	on-off
<b>R41/3K/60/8</b>	3300	2325	40	3000K	60°	DALI
<b>R41/4K/60/8</b>	3500	2607	40	4000K	60°	DALI



Proiettore LED orientabile per installazione su binario eurostandard.

Adjustable LED projector for eurostandard track installation.

Projecteur LED orientable pour installation sur rail triphasé.

Verstellbarer LED Strahler für Eurostandard-Schiene.

LED COB LUXEON Philips.

Philips LUXEON COB LED.

LED COB LUXEON Philips.

Philips LUXEON COB LED.

Life time 50.000h (rendimento 70%).

Life time 50.000h (70% lumen maintenance).

Durée de vie 50.000h (rendement 70%).

Lebensdauer 50.000h (Lichtstrom 70%).

Corpo in alluminio verniciato bianco gofrato o nero opaco.

Body in white-embossed or opal black painted aluminium.

Corps en aluminium peint blanc ou noir mat.

Gehäuse aus weiss lackiertem Aluminium geprägt oder mattschwarz.

Ottiche intercambiabili in policarbonato metallizzato.

Inter-changeable optics in metal polycarbonate.

Optiques interchangeable en polycarbonate métallisé.




Wechselreflektor in metallisiertem Polycarbonat.

Alimentatore 220-240V 50/60Hz incluso.

220-240V 50/60Hz power supply included.

Alimentation 220-240V - 50/60Hz incluse.

Netzgerät 220-240V - 50/60Hz enthalten.

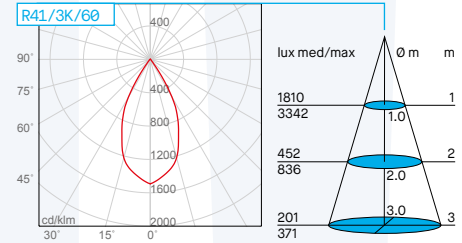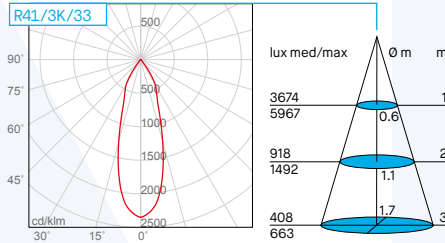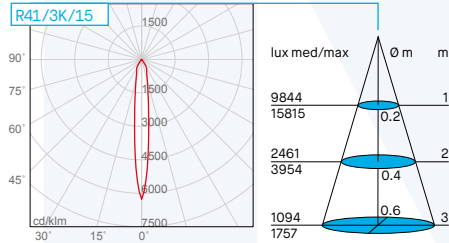

Binari e accessori da ordinare separatamente.  
Tracks and accessories to be ordered separately.  
Rails et accessoires à commander séparément.  
Schiene und Zubehör separat zu bestellen.

Accessori su richiesta - Accessories upon request - Accessoires disponibles sur demande - Zubehör auf Anfrage

Code	Descrizione	Description
LENS/R41/15	Lente intercambiabile 15° per R39, R40 e R41	Interchangeable 15° lens for R39, R40 and R41
LENS/R41/35	Lente intercambiabile 35° per R39, R40 e R41	Interchangeable 35° lens for R39, R40 and R41
LENS/R41/60	Lente intercambiabile 60° per R39, R40 e R41	Interchangeable 60° lens for R39, R40 and R41



Proiettore LED orientabile per installazione su binario eurostandard.

Adjustable LED projector for eurostandard track installation.

Projecteur LED orientable pour installation sur rail triphasé.

Verstellbarer LED Strahler für Eurostandard-Schiene.

LED COB LUXEON Philips.

Philips LUXEON COB LED.

LED COB LUXEON Philips.

Philips LUXEON COB LED.

Life time 50.000h (rendimento 70%).

Life time 50.000h (70% lumen maintenance).

Durée de vie 50.000h (rendement 70%).

Lebensdauer 50.000h (Lichtstrom 70%).

Corpo in alluminio verniciato bianco gofrato o nero opaco.

Body in white-embossed or opal black painted aluminium.

Corps en aluminium peint blanc ou noir mat.

Gehäuse aus weiss lackiertem Aluminium geprägt oder mattschwarz.

Ottiche intercambiabili in policarbonato metallizzato.

Inter-changeable optics in metal polycarbonate.

Optiques interchangeable en polycarbonate métallisé.




Wechselreflektor in metallisiertem Polycarbonat.

Alimentatore 220-240V 50/60Hz incluso.

220-240V 50/60Hz power supply included.

Alimentation 220-240V - 50/60Hz incluse.

Netzgerät 220-240V - 50/60Hz enthalten.

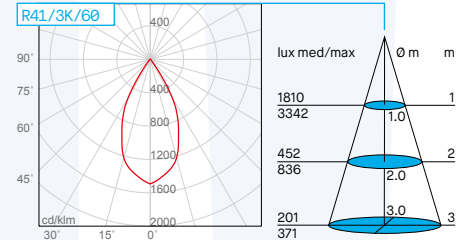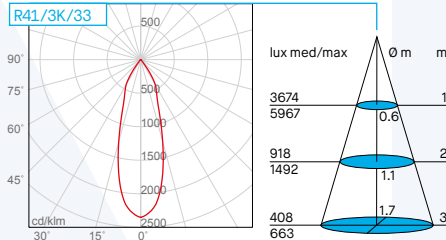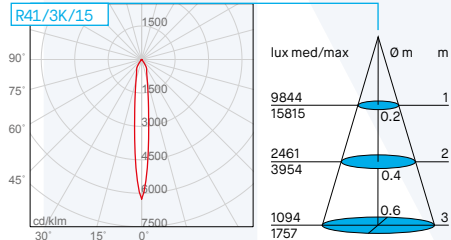

Binari e accessori da ordinare separatamente.  
Tracks and accessories to be ordered separately.  
Rails et accessoires à commander séparément.  
Schiene und Zubehör separat zu bestellen.

Accessori su richiesta - Accessories upon request - Accessoires disponibles sur demande - Zubehör auf Anfrage

Code	Descrizione	Description	Description	Description
LENS/R41/15	Lente intercambiabile 15° per R39, R40 e R41	Interchangeable 15° lens for R39, R40 and R41	Lentille interchangeable 15° pour R39, R40 et R41	Austauschbare 15° Linse für R39, R40 und R41
LENS/R41/35	Lente intercambiabile 35° per R39, R40 e R41	Interchangeable 35° lens for R39, R40 and R41	Lentille interchangeable 35° pour R39, R40 et R41	Austauschbare 35° Linse für R39, R40 und R41
LENS/R41/60	Lente intercambiabile 60° per R39, R40 e R41	Interchangeable 60° lens for R39, R40 and R41	Lentille interchangeable 60° pour R39, R40 et R41	Austauschbare 60° Linse für R39, R40 und R41