


FUSIBILI CILINDRICI

Cylindrical fuses | Fusibles cylindriques

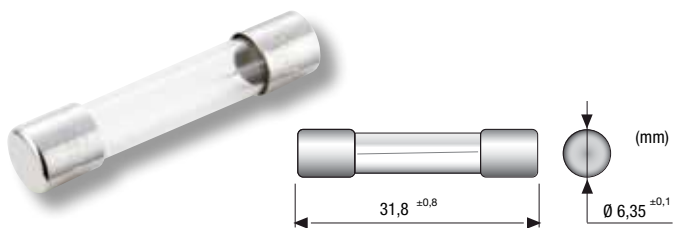

FUSIBILI 6,3x32 CF 6,3x32 CF fuses | Fusibles 6,3x32 CF

Dimensioni 6,3x32 mm	Dimensions 6,3x32 mm	Dimensions 6,3x32 mm
Caratteristica F= rapidi	Characteristic F= fast	Caractéristique F= rapides
Tensione 250 V	Voltage 250 V	Tension 250 V
Capacità di rottura L 35 A	Breaking capacity L 35 A	Pouvoir de coupure L 35 A
Corpo Vetro	Body Glass	Corps Verre
Marchio di fabbrica OMEGA	Trade mark OMEGA	Marque de fabrique OMEGA
Norme riferimento EN60127.2.IV	Standards EN60127.2.IV	Normes EN60127.2.IV




pag. 27



TEMPI DI FUSIONE | Time current | Temps de fusion

Corrente nominale In Rated current Courant nominal	Corrente di prova Test current Courant d'essai				
	1,5xIn	2,1xIn	2,75xIn	4xIn	10xIn
50 mA - 100 mA 125 mA - 25 A	> 1 h > 1 h	< 20 s < 20 s	2 ms - 200 ms 20 ms - 1,5 s	1 ms - 30 ms 8 ms - 400 ms	< 5 ms < 80 ms

Corrente nominale Rated current Courant nominal	Codice Code Code	I ² t I ² t Ft	Caduta tensione mV Voltage drop mV Chute de tension mV
50 mA	CF632050	0,00045	-
63 mA	CF632063	-	-
80 mA	CF632080	-	-
100 mA	CF632110	0,0020	1127
125 mA	CF632112	-	-
160 mA	CF632116	0,0051	1015
200 mA	CF632120	0,0120	703
250 mA	CF632125	-	-
315 mA	CF632131	-	-
400 mA	CF632140	-	-
500 mA	CF632150	2,45	520
630 mA	CF632163	3,0958	500
800 mA	CF632180	-	-
1 A	CF632210	7,0000	151
1,25 A	CF632212	9,3750	130
1,6 A	CF632216	17,92	130
2 A	CF632220	26,00	125
2,5 A	CF632225	41,25	125
3,15 A	CF632231	76,4033	110
4 A	CF632240	102,40	114
5 A	CF632250	140,00	115
6,3 A	CF632263	309,5820	95
8 A	CF632280	371,20	109
10 A	CF632310	360,00	105
12,5 A	CF632312	984,375	101
16 A	CF632316	1792,00	105
20 A	CF632320	2880,00	100
25 A	CF632325	2920,00	100

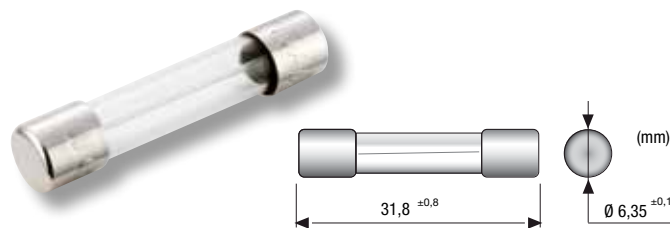

FUSIBILI 6,3x32 CT 6,3x32 CT fuses | Fusibles 6,3x32 CT

Dimensioni 6,3x32 mm	Dimensions 6,3x32 mm	Dimensions 6,3x32 mm
Caratteristica T= ritardati	Characteristic T= time delay	Caractéristique T= temporisés
Tensione 250 V	Voltage 250 V	Tension 250 V
Capacità di rottura L 35 A	Breaking capacity L 35 A	Pouvoir de coupure L 35 A
Corpo Vetro	Body Glass	Corps Verre
Marchio di fabbrica OMEGA	Trade mark OMEGA	Marque de fabrique OMEGA
Norme riferimento EN60127.2.IV	Standards EN60127.2.IV	Normes EN60127.2.IV



pag. 27



TEMPI DI FUSIONE | Time current | Temps de fusion

Corrente nominale In Rated current Courant nominal	Corrente di prova Test current Courant d'essai				
	1,5xIn	2,1xIn	2,75xIn	4xIn	10xIn
50 mA - 2 A 2,5 mA - 25 A	> 1 h > 1 h	800 ms - 20 s 800 ms - 30 s	150 ms - 3 s 200 ms - 6 s	60 ms - 1 s 80 ms - 2 s	10 ms - 200 ms 15 ms - 300 ms

Corrente nominale Rated current Courant nominal	Codice Code Code	I ² t I ² t Ft	Caduta tensione mV Voltage drop mV Chute de tension mV
63 mA	CT632063	-	-
80 mA	CT632080	-	-
100 mA	CT632110	-	-
125 mA	CT632112	-	-
160 mA	CT632116	-	-
200 mA	CT632120	0,24	-
250 mA	CT632125	-	-
315 mA	CT632131	0,2878	282
400 mA	CT632140	-	-
500 mA	CT632150	2,6750	-
630 mA	CT632163	-	-
800 mA	CT632180	6,7840	179
1 A	CT632210	4,50	185
1,25 A	CT632212	11,7188	110
1,6 A	CT632216	-	-
2 A	CT632220	42,80	90
2,5 A	CT632225	-	-
3,15 A	CT632231	114,1088	75
4 A	CT632240	148,800	-
5 A	CT632250	195,00	-
6,3 A	CT632263	400,869	85
8 A	CT632280	633,60	197
10 A	CT632310	1550,00	-
12,5 A	CT632312	2468,75	-
16 A	CT632316	-	-
20 A	CT632320	-	-
25 A	CT632325	-	-

