

# Panduct PanelMax One-Piece Corner Wiring Duct

For use with Panduit Panduct Types F, G, FS and D Wiring Duct


Part Numbers: CWD2\*\*6, CWD3\*\*6, CWD4\*\*6, C2\*\*6, CDCLP2, CDCLP3, CDCLP4, CDLB3, CDLB4


© Panduit Corp. 2012


#### INSTALLATION INSTRUCTIONS


**RW207** 


#### Option 1 - Panduct Corner Wiring Duct Mounting Clip




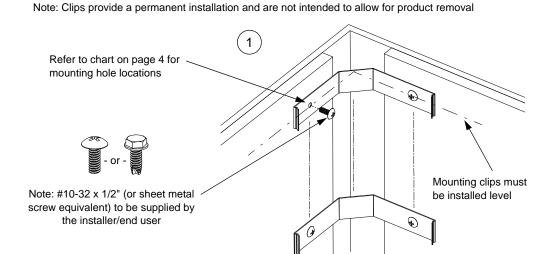

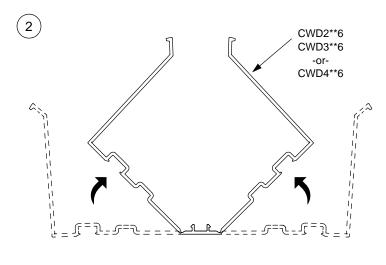





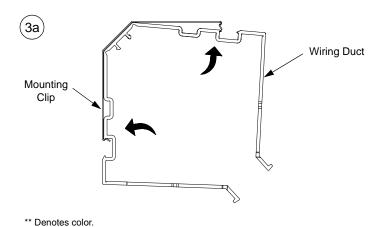


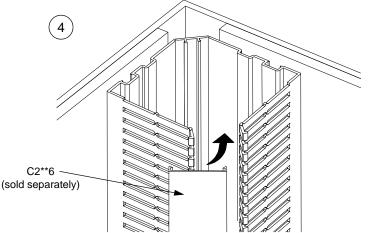



### **Option 2 - Panduct Nylon Rivets or Standard Fasteners**



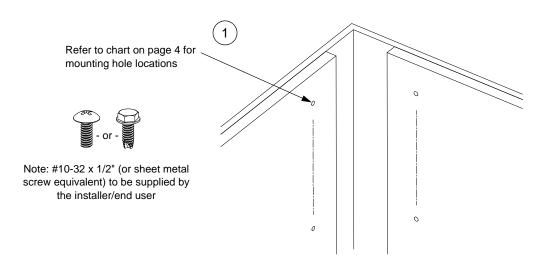

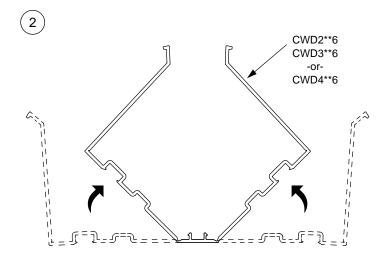




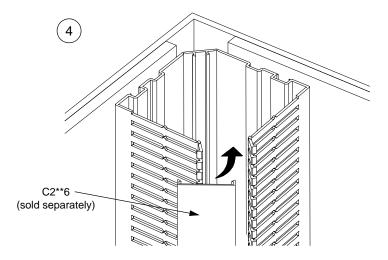

For Technical Support: www.panduit.com/resources/install\_maintain.asp

#### Option 3 - Panduct Corner Wiring Duct L-Bracket Mounting

Note: For use in vertical applications only when no side panel is present.







Note: #10-32 x 1/2" (or sheet metal screw equivalent) to be supplied by the installer/end user

Corner Duct L-Bracket	"C" minimum clearance to side wall	"D" minimum distance to edge of back panel
CDLB3	2.03" (51.6)	0.68" (17.4)
CDLB4	2.96" (75.2)	0.68" (17.4)


Dimensions may vary due to the depth of the side panel or due to the size of the panel opening.

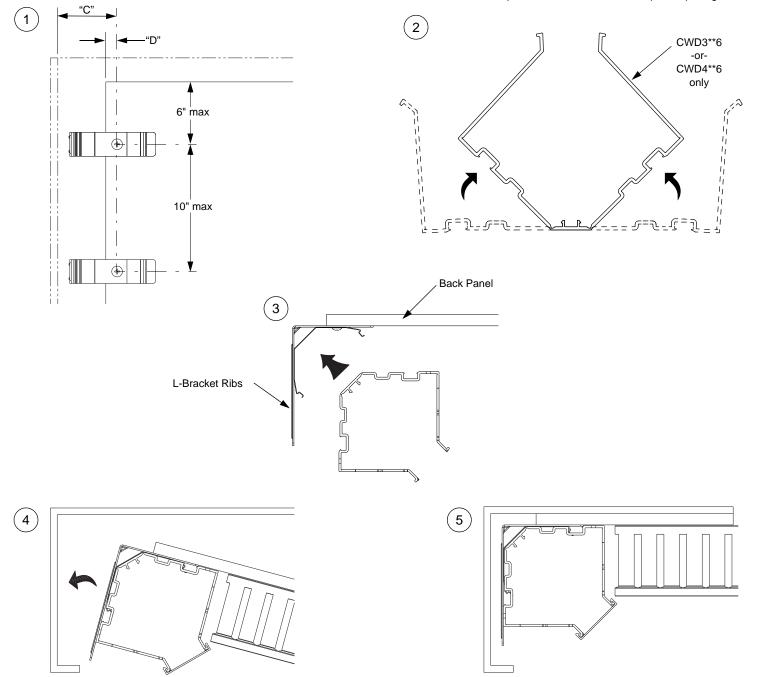


For Technical Support: www.panduit.com/resources/install\_maintain.asp

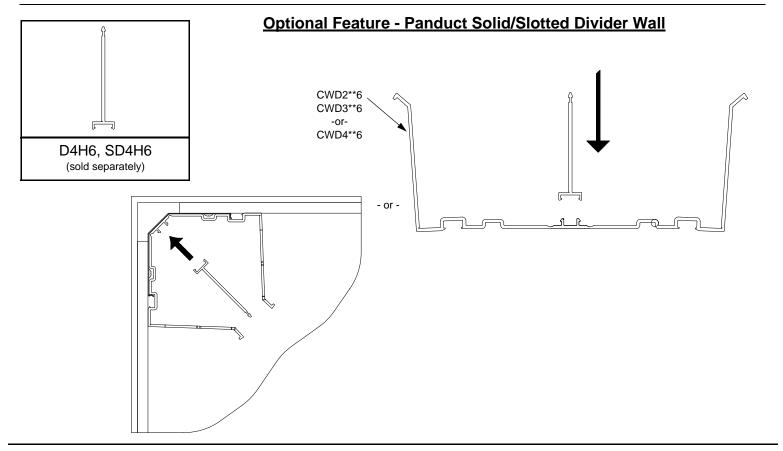

## Mounting Hole Locations for CDCLP or Standard Fasteners (Options 1 and 2)

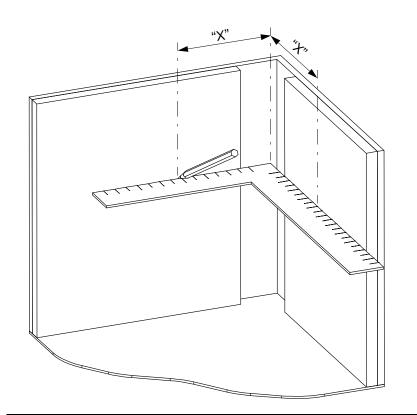

"X" Dimension			
Corner Duct	CDCLP	Screws, Fasteners, or NR1-C	
CWD2**6	1.60" (1 19/32")	2.95" (215/16")	
CWD3**6	1.91" (1 29/32")	3.88" (31% ")	
CWD4**6	2.84" (2 27/32")	4.93" (4 15/16")	



For Instructions in Local Languages and Technical Support:

 $www.panduit.com/resources/install\_maintain.asp$ 



E-mail: techsupport@panduit.com Phone: 866-405-6654

Page 4 of 4 RW207\_05