

VERTICAL 4 POST TIE OFF BRACKET




Part Number(s): V4PTOB, V4PTOBWH

© Panduit Corp. 2023


INSTALLATION INSTRUCTIONS

V00030AP_01

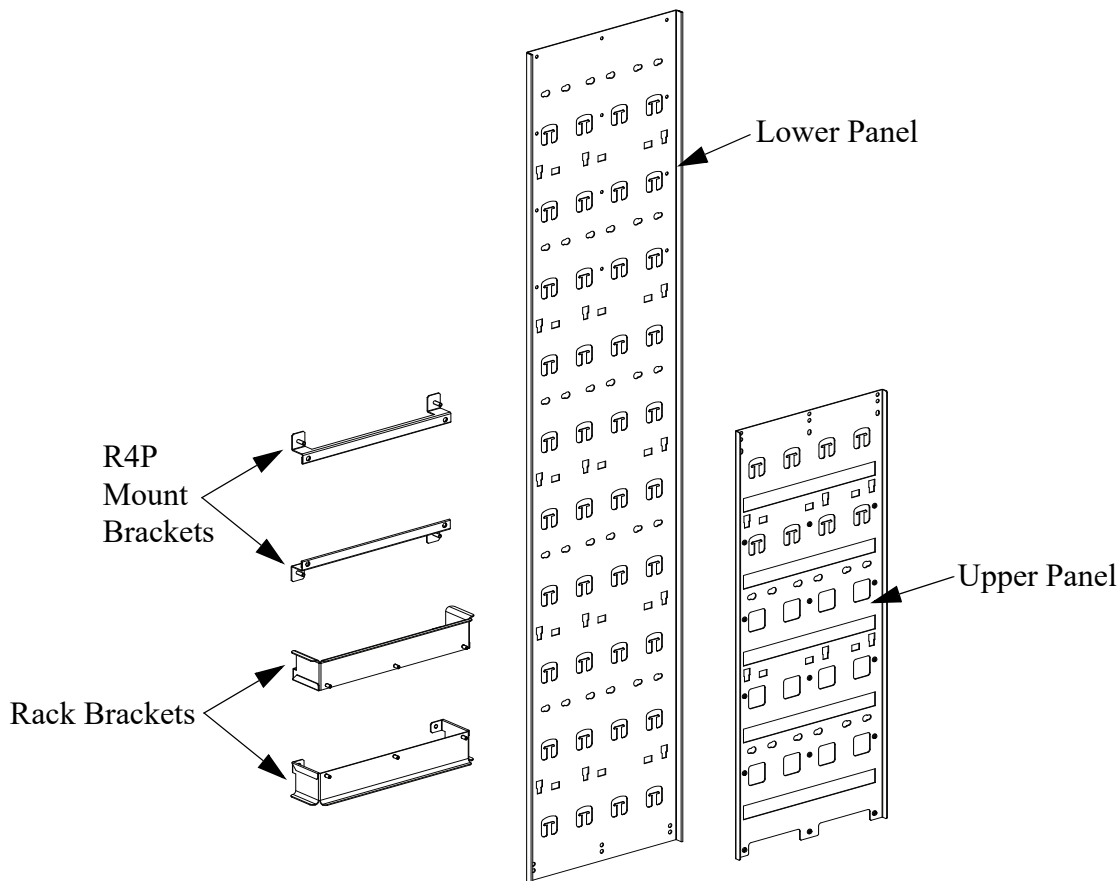


Required hardware - included

(6) M5-10mm CARRIAGE BOLT




(14) M6 FLANGE NUT



Required tools - not included

RATCHET W/
M7 SOCKET
& M10 SOCKET

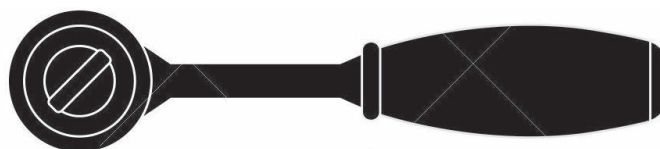



For Technical Support: www.panduit.com


TIE OFF BRACKET HEIGHT ADJUSTMENT

Tie Off Brackets can be adjusted to fit 42RU, 45RU & 52RU racks. See below for hole spacing for your specific rack height.

42RU

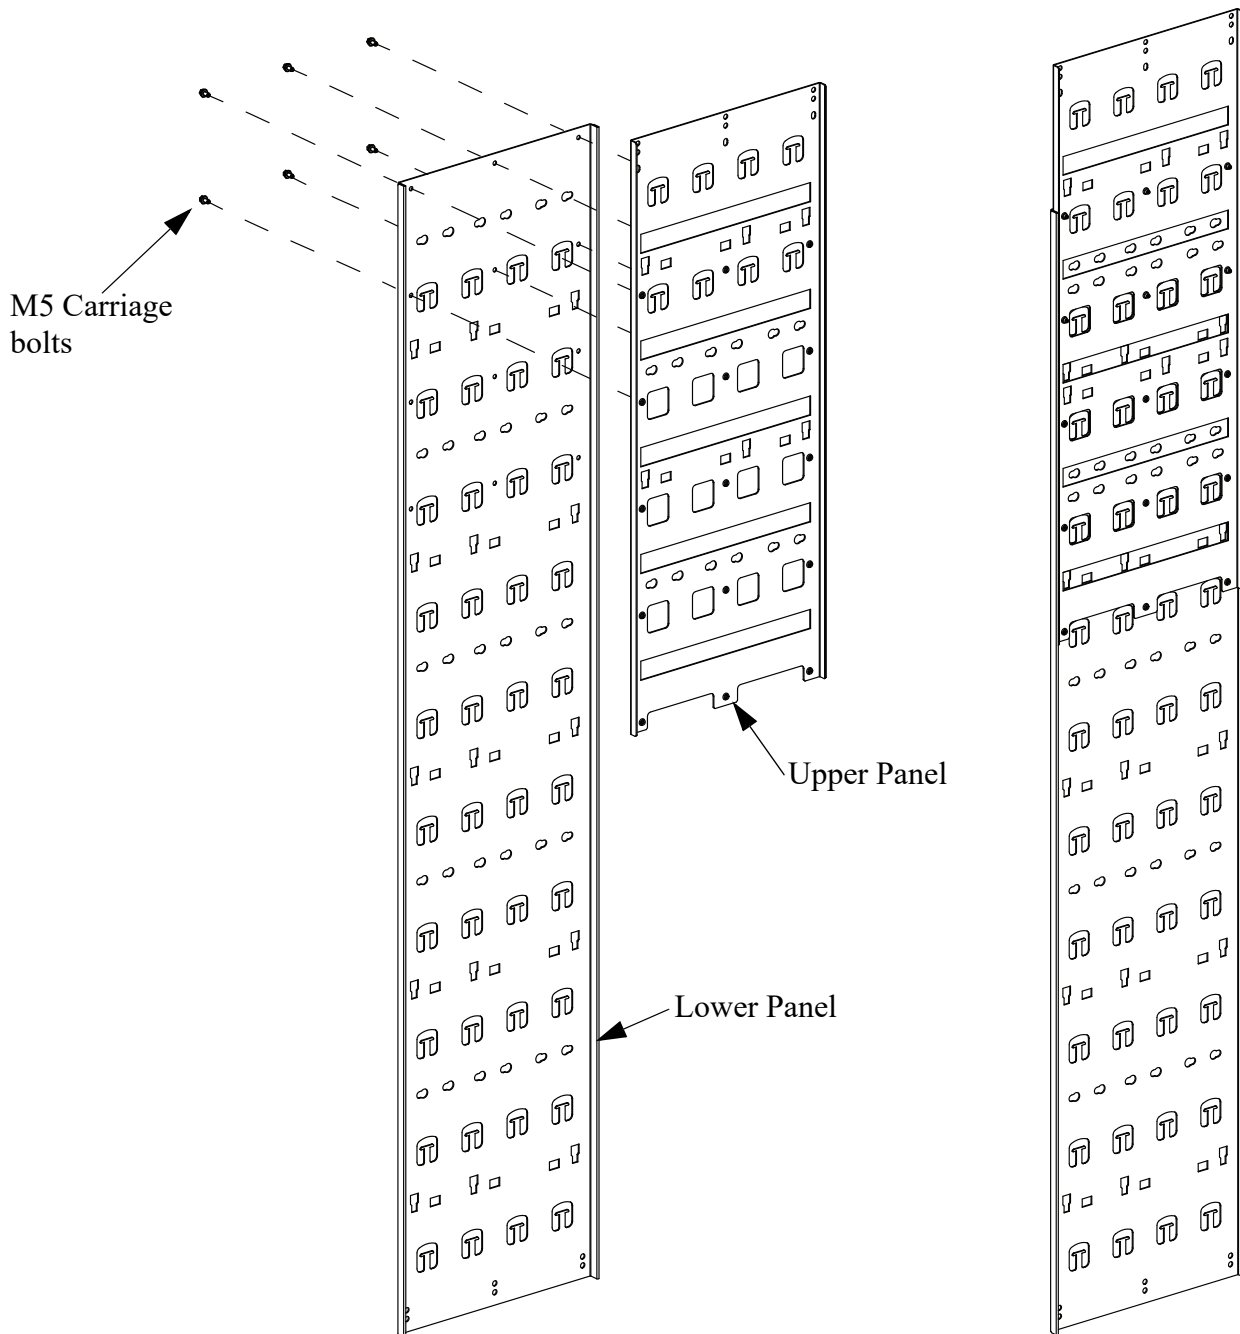


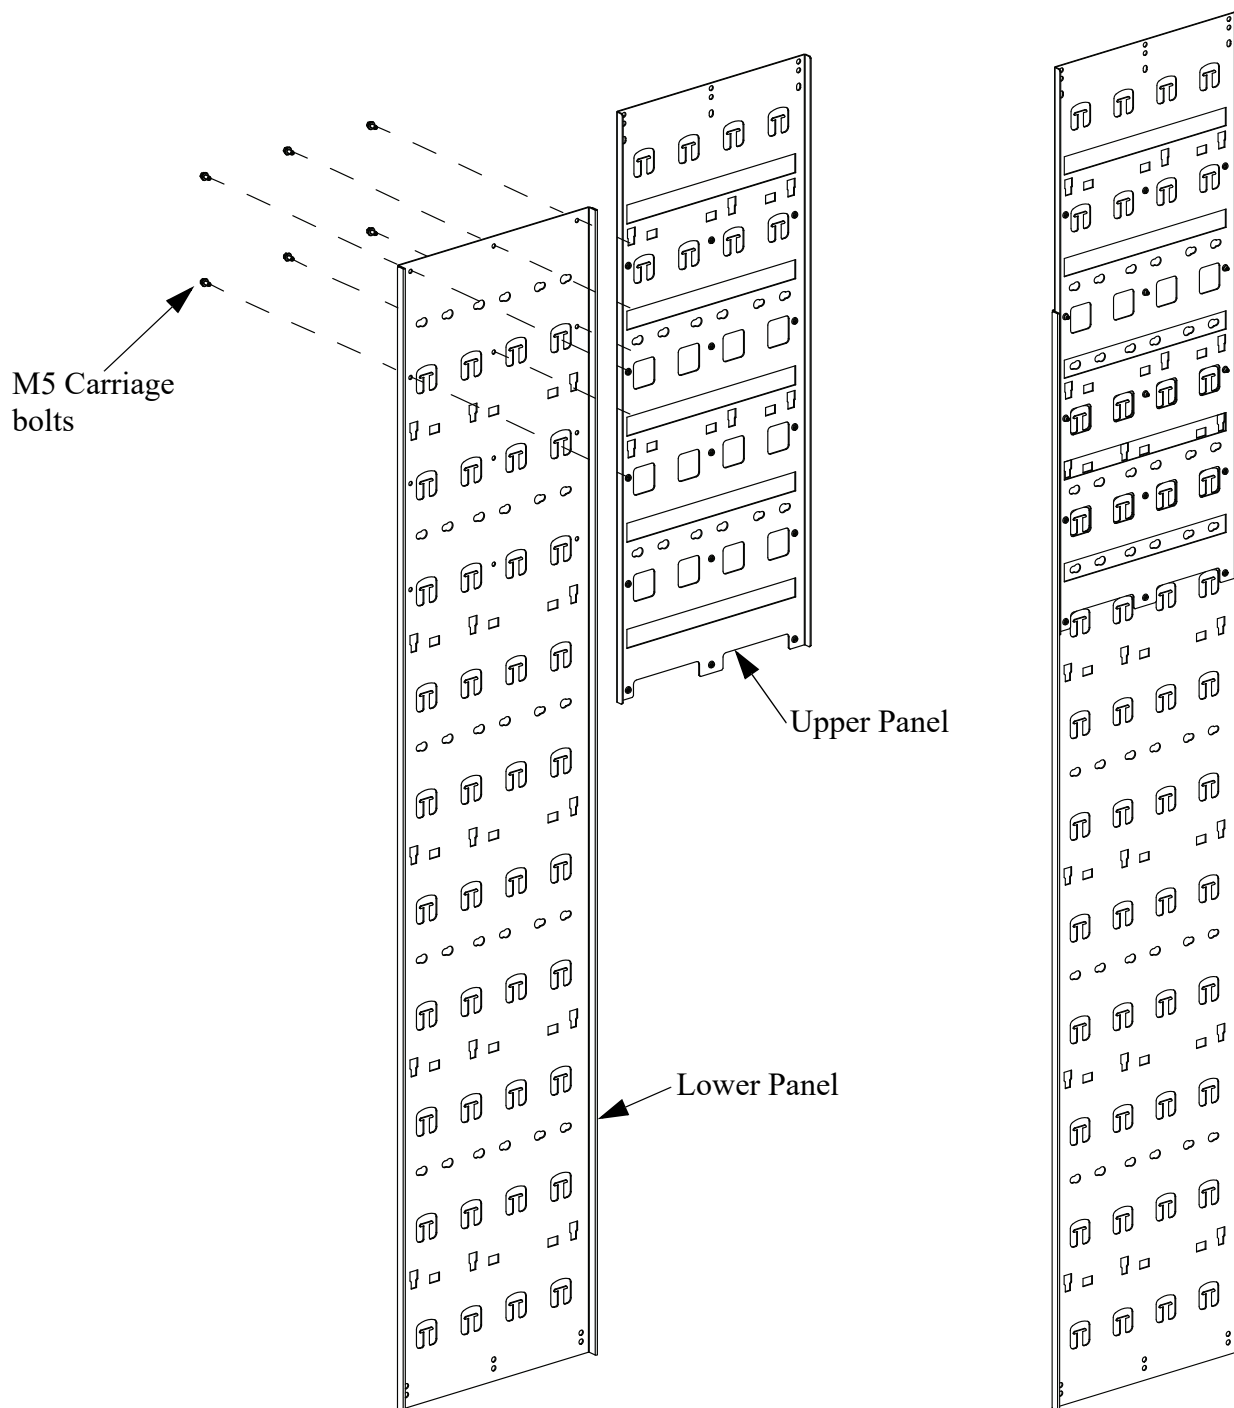TIE OFF BRACKET HEIGHT ADJUSTMENT (cont.)**45RU**

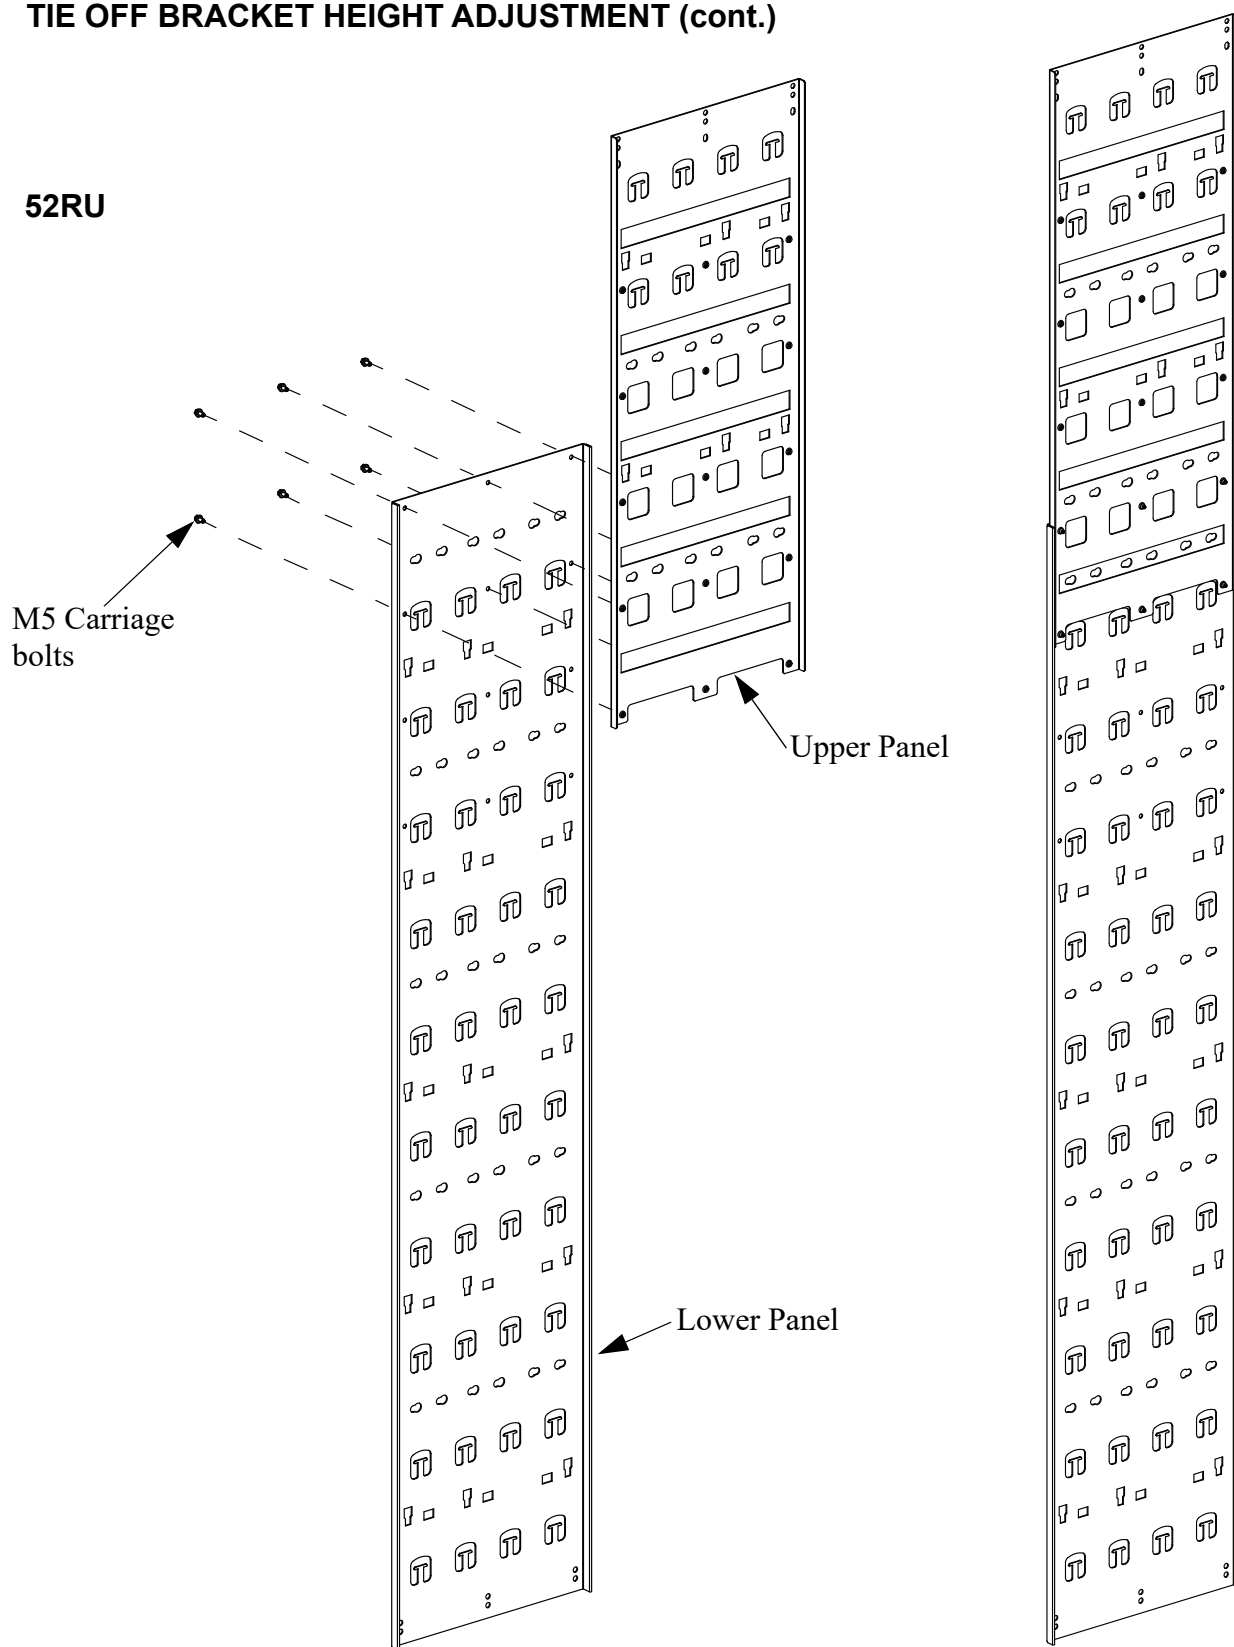TIE OFF BRACKET HEIGHT ADJUSTMENT (cont.)**52RU**


R4P TIE OFF BRACKET ASSEMBLY

1. Attach R4P Rack Mount Brackets at top & bottom of Rack using (4) M6 hex nuts.
2. Attach Rack Bracket to R4P Mount brackets using (4) M6 hex nuts.
3. Secure assembled panels to the Rack Brackets using (6) M6 hex nuts.

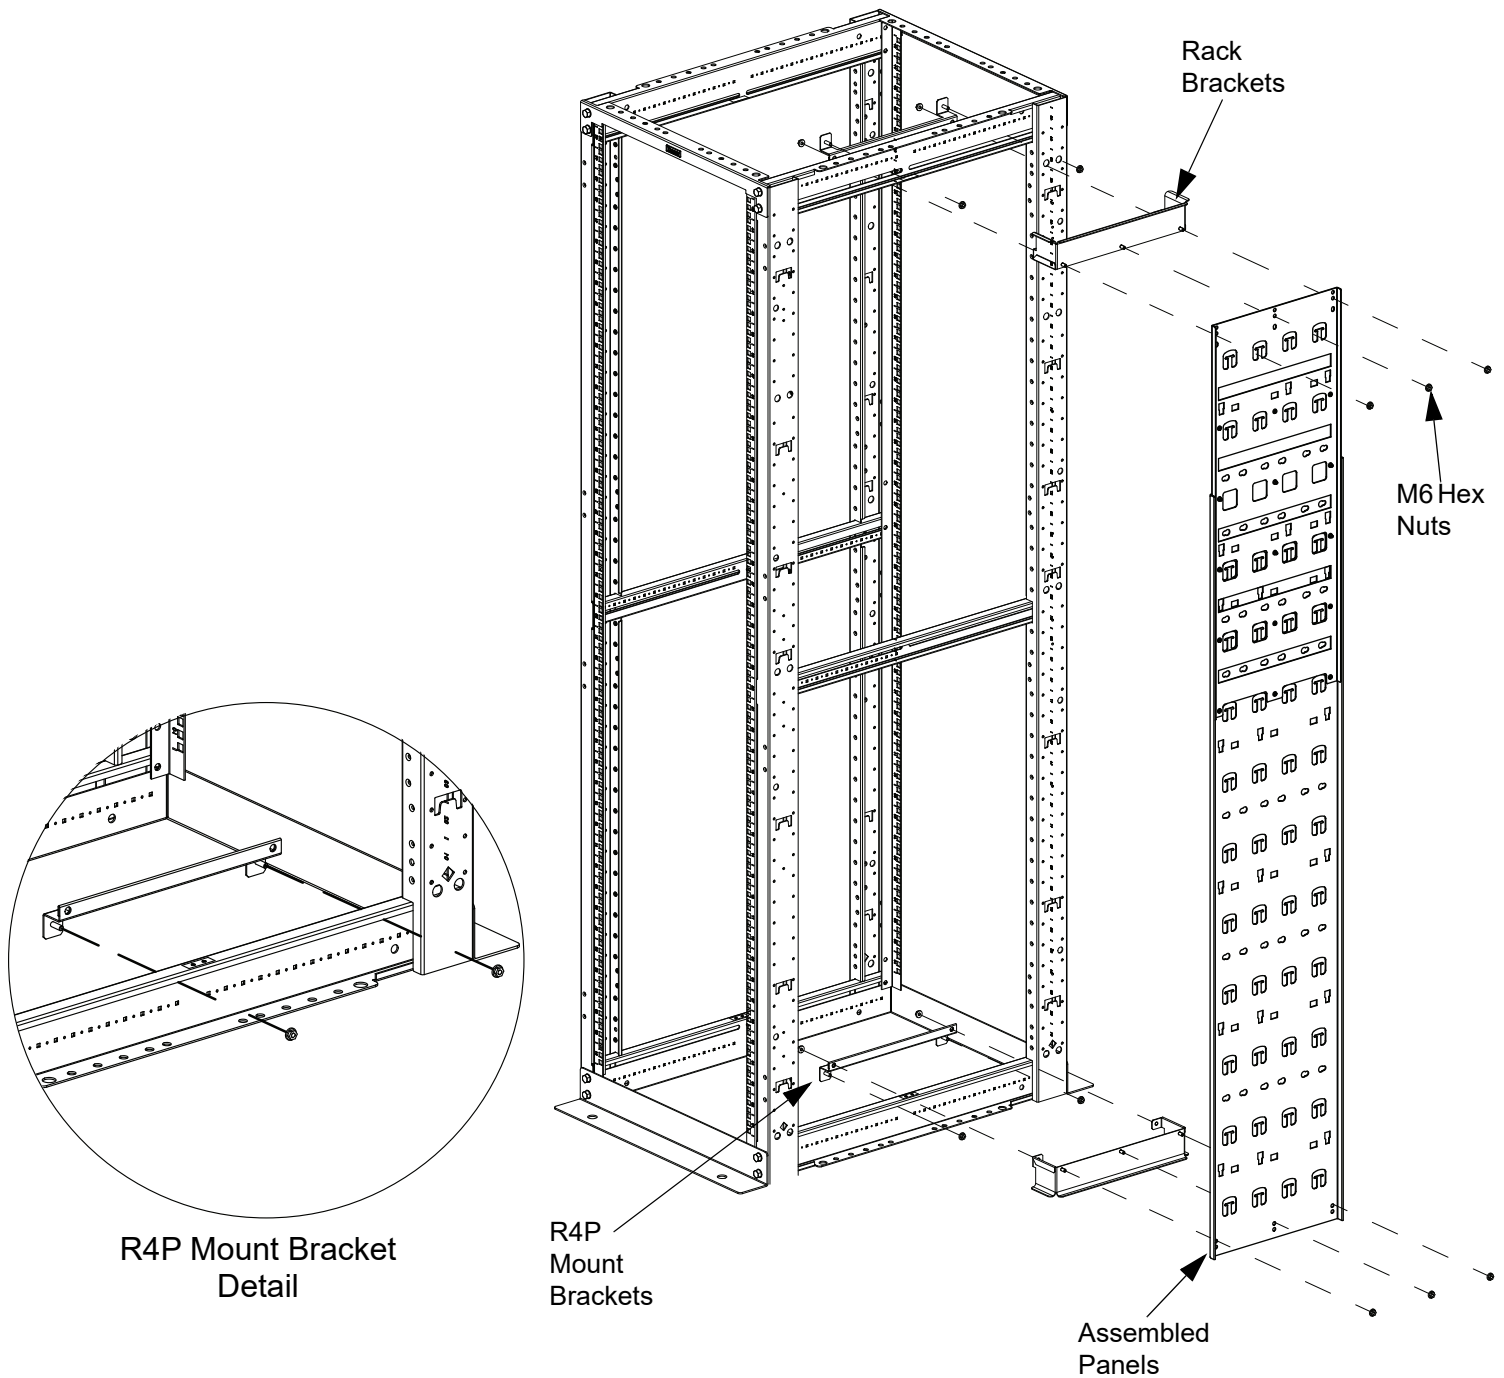

AR4P TIE OFF BRACKET ASSEMBLY

1. Attach Rack Bracket to rack using (4) M6 hex nuts.
2. Secure assembled panels to the Rack Brackets using (6) M6 hex nuts.

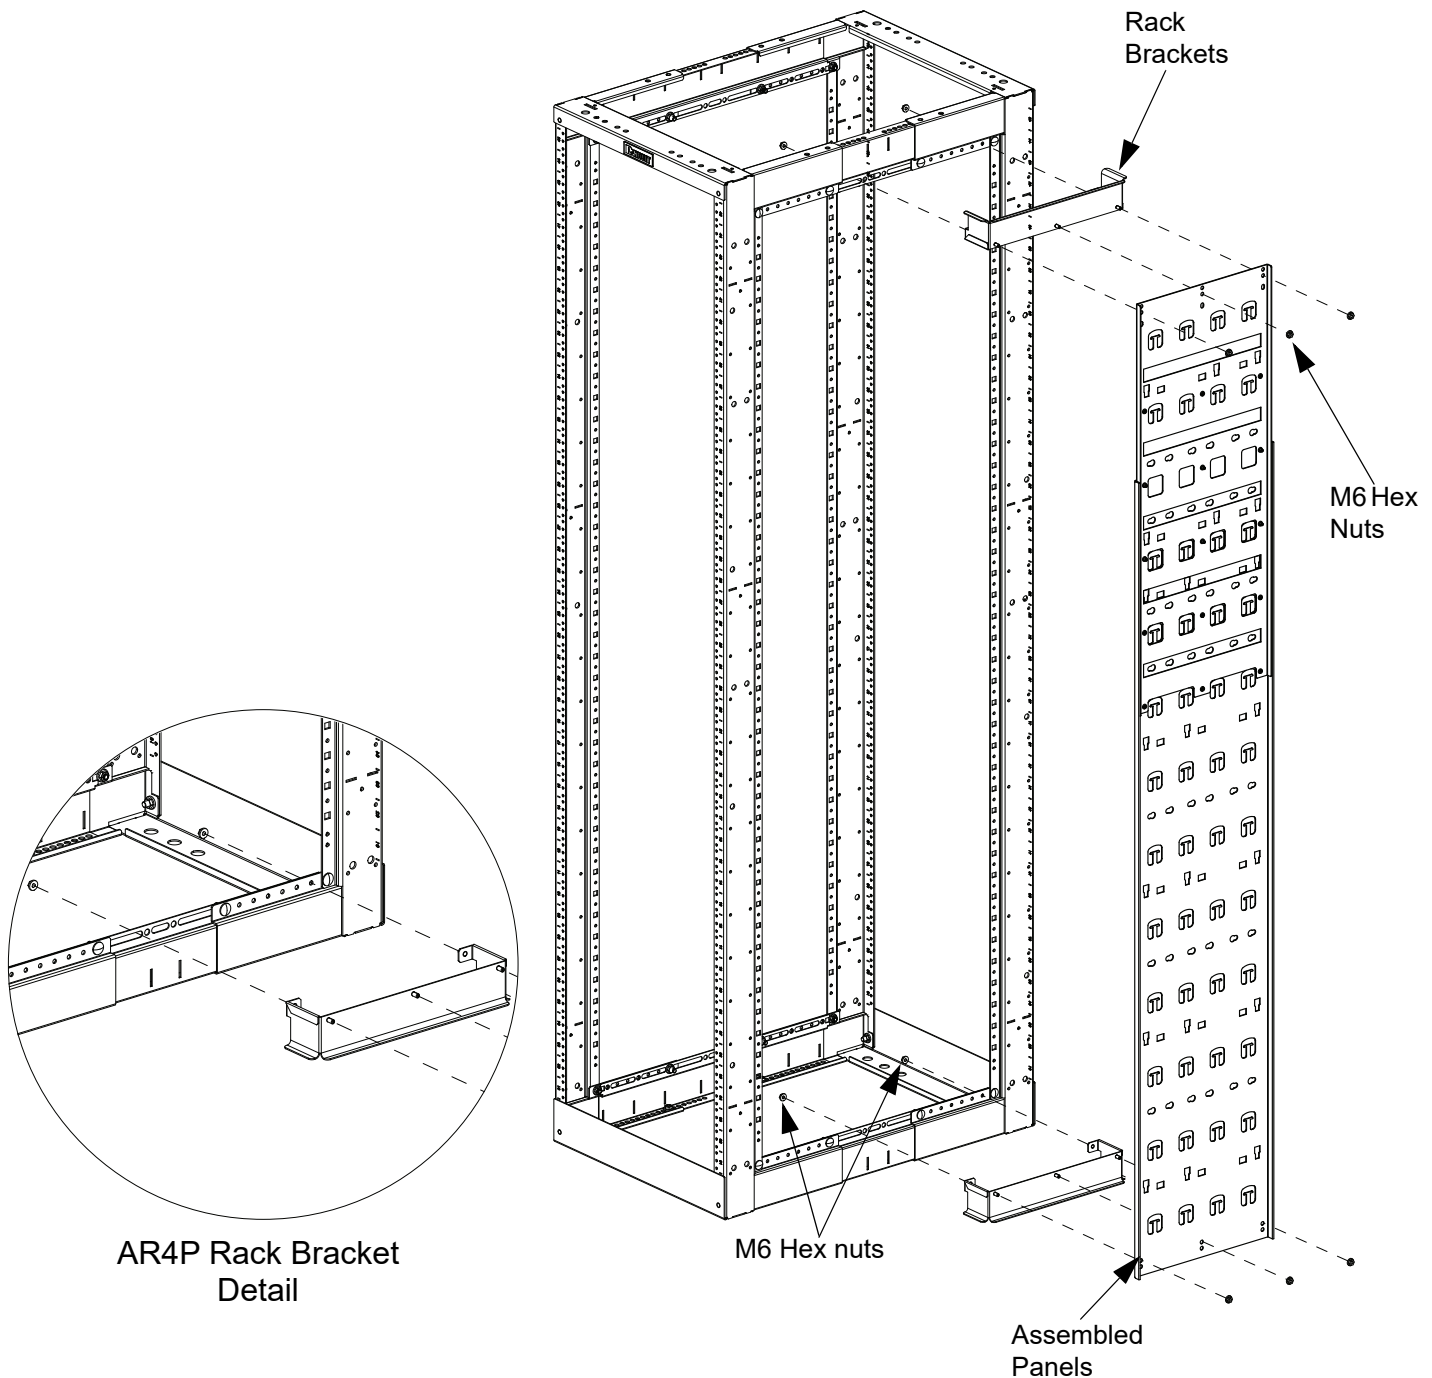

L-Retainer (S1LR, S2LR) and D-Ring (S1DR, S2DR) Installation

- Cable Management L-Retainers - Insert mounting tab of L-Retainer into any keyed mounting slot located on the cable management panel. Slide L-Retainer up or down in keyed slot and engage release tab in adjacent cutout. Pull release tab and reverse the process to remove L-Retainer.
- Cable Management D-Rings - Insert mounting tab(s) of L-Retainer into round keyhole slot(s) located on the cable management panel. Slide D-Ring in keyhole slot to engage D-Ring.

